REL

Edge Lit Recessed LED Downlight

Product Description

The REL Single CCT Edge Lit Downlight offers an attractive aesthetic with a low profile. The edge-lit technology makes it a practical solution with high performance. Adjustable spring-loaded retention tabs allow a secure fit and easy installation. Perfect for adding light in tight spaces such as hallways, bathrooms, basements, and utility closets.

Construction

- Cast aluminum housing routes heat away from electrical components
- Edge-Lit technology allows for extremely thin fixture depth
- Adjustable, spring loaded retention tabs ensure secure fixture retention
- Off-board driver minimizes installation height and maximizes fixture life through improved heat management

Optical System

- Precision engineered optical stack creates uniform light distribution that maximizes lumen output
- Utilizes high performing LEDs with 90+ CRI and an R9 > 50
- CCTs offered at 2700K, 3000K, 4000K, or 5000K

Electrical

- Input voltage of 120VAC
- Dimmable to 5% with compatible leading edge (TRIAC) or trailing edge (ELV) dimmers
- Operating temperature rating of -4°F to 104°F (-20°C to 40°C)

Finish

- · White powder coat finish standard
- Color trims available in Black, Nickel or Oil Rubbed Bronze

Mounting and Installation

- Spring loaded retention tabs allow for easy installation into ceilings up to ¾" thick with no need for a recessed housing
- Off-board driver/junction box includes three 1/2" KOs and three-port poke-in connectors
- Included paper cut-out template
- Accessory steel rough-in frames and templates available
- \bullet Accessory extension power cables (2' & 10') available
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

Listings

- cETLus 1598 Classified for wet locations
- Energystar listed
- CA Title 24 compliant (JA8)
- Certified for direct contact with insulation (IC-Rated)
- Meets Air Tight requirements per ASTM E283
- Compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5) for closet use
- RoHS Compliant: Free from harmful and hazardous materials
- Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions
- LED lumen maintenance: L70(9k)>54,000 hrs
- LM-79, LM-80 testing performed in accordance with IESNA standards

Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

| Project | | |
|---------|--|--|
| Catalog | | |
| Type | | |
| Date | | |



REL 4", 6" and 8" Edgelit LED Downlight 650, 900, 1200 lumen





Ordering

| Ordering Information Example: REL611203KR | | | kample : REL611203KRDWH | | |
|---|---------|---------|-------------------------|------------|-------------------|
| Series | Version | Voltage | CCT's | Trim Shape | Trim Color |
| REL4 | 1 | 120 | 2K (2700K) | RD (Round) | WH (White) |
| REL6 | | | 3K (3000K) | | |
| REL8 | | | 4K (4000K) | | |
| | | | 5K (5000K) | | |

Specifications and dimensions subject to change without notice

| Accessories | accessories sold separate |
|--------------------------------|---------------------------|
| 4" Black Trim Ring | REL4-1-TR-RD-BK |
| 4" Brushed Nickel Trim Ring | REL4-1-TR-RD-NK |
| 4" Oil-Rubbed Bronze Trim Ring | REL4-1-TR-RD-OB |
| 6" Black Trim Ring | REL6-1-TR-RD-BK |
| 6" Brushed Nickel Trim Ring | REL6-1-TR-RD-NK |
| 6" Oil-Rubbed Bronze Trim Ring | REL6-1-TR-RD-OB |
| 8" Black Trim Ring | REL8-1-TR-RD-BK |
| 8" Brushed Nickel Trim Ring | REL8-1-TR-RD-NK |
| 8" Oil-Rubbed Bronze Trim Ring | REL8-1-TR-RD-OB |

| Accessories | accessories sold separately |
|---|-----------------------------|
| 4" White Goof Ring | REL4-1-GR-RD-WH |
| 6"White Goof Ring | REL6-1-GR-RD-WH |
| 2' Extension Cable for REL | REL-EXTCABLE-02 |
| 10' Extension Cable for REL | REL-EXTCABLE-10 |
| Frame for 3", 4", 6" remote driver fixtures | MULTIFRAME-346-1 |
| 4" Rough In Flat Template | ROUGHIN-TEMPLATE-4 |
| 6" Rough In Flat Template | ROUGHIN-TEMPLATE-6 |
| 3", 4", 6" Rough In Flat Template | ROUGHIN-TEMPLATE-346 |

Performance Data and Dimming

| Performance Data | | | | |
|------------------|----------------|--------|-------|-------------|
| | Model Number | Lumens | Watts | Lumens/Watt |
| | REL411202KRDWH | 666 | | 64.7 |
| | REL411203KRDWH | 680 | 10.3 | 66.0 |
| | REL411204KRDWH | 694 | 10.5 | 67.4 |
| | REL411205KRDWH | 717 | | 69.6 |
| | REL611202KRDWH | 902 | | 76.4 |
| | REL611203KRDWH | 921 | 11.8 | 78.0 |
| | REL611204KRDWH | 940 | 11.0 | 79.7 |
| | REL611205KRDWH | 971 | | 82.3 |
| | REL811202KRDWH | 1279 | | 71.5 |
| | REL811203KRDWH | 1306 | 17.9 | 73.0 |
| | REL811204KRDWH | 1333 | 17.9 | 74.5 |
| | REL811205KRDWH | 1376 | | 76.9 |

Recommended Dimmers* Lutron Skylark SELV-300P Lutron Skylark SCL-153P Lutron Skylark CT-603PG Lutron DIVA DVELV-300P Lutron MAELV-600

Lutron PD-10NXD

*Not a complete list. Check compatibility before installation.




Photometric Data

REL4

Input Voltage (VAC) 120
System Level Power (W) 10.3
Delivered Lumens (Lm) 666
System Efficacy (Lm/W) 64.7
Correlated Color Temp (K) 2694
Color Rendering Index (CRI) 93, R9>50
Beam Angle 110.5
Spacing Criteria 125

| acing Criteria | | | |
|---------------------|-------|--|--|
| CCT Data Multiplier | | | |
| 3000K | 1.021 | | |
| 4000K | 1.042 | | |

1.076



| Intensity Summary (Candle Power) | | |
|-------------------------------------|---------|--|
| Angle | Mean CP | |
| 0 | 310 | |
| 5 | 308 | |
| 15 | 298 | |
| 25 | 277 | |
| 35 | 247 | |
| 45 | 209 | |
| 55 | 164 | |
| 65 | 115 | |
| 75 | 65 | |
| 85 | 19 | |
| 90 0 | | |
| | | |

| Cone of Light Tabulation | | | | |
|--------------------------|-------------|----------|--|--|
| Mounted height | Footcandles | Diameter | | |
| (Feet) | Beam Center | (Feet) | | |
| 4 | 14.7 | 11.5 | | |
| 6 | 6.6 | 17.3 | | |
| 8 | 3.7 | 23.1 | | |
| 10 | 2.4 | 28.8 | | |


| Zonal Lumen Summary | | | |
|---------------------|--------|----------------|--|
| Zone | Lumens | % of Luminaire | |
| 0-30 | 182 | 27.3% | |
| 0-40 | 297 | 44.5% | |
| 0-60 | 521 | 78.2% | |
| 0-90 | 666 | 100% | |
| 90-180 | 0 | 0% | |
| 0-180 | 666 | 100% | |

REL6

5000K

Input Voltage (VAC) 120 System Level Power (W) 11.8 Delivered Lumens (Lm) 902 System Efficacy (Lm/W) 76.4 Correlated Color Temp (K) 2728 Color Rendering Index (CRI) 93, R9>50 Beam Angle 113.3 Spacing Criteria 1.28

| CCT Data Multiplier | | | |
|---------------------|-------|--|--|
| 3000K | 1.021 | | |
| 4000K | 1.042 | | |
| SOOOK | 1 076 | | |



| (Candle Power) | | | | |
|----------------|-----|--|--|--|
| Angle Mean CP | | | | |
| 0 | 310 | | | |
| 5 | 308 | | | |
| 15 | 298 | | | |
| 25 | 277 | | | |
| 35 | 247 | | | |
| 45 | 209 | | | |
| 55 | 164 | | | |
| 65 | 115 | | | |
| 75 | 65 | | | |
| 85 | 19 | | | |
| 90 | 0 | | | |
| | | | | |


| Cone of Light Tabulation | | | | |
|--------------------------|----------------------------|--------------------|--|--|
| Mounted height (Feet) | Footcandles Beam Center | Diameter (Feet) | | |
| 4 | 19.3 | 12.2 | | |
| 6 | 8.6 | 18.2 | | |
| 8 | 4.8 | 24.3 | | |
| 10 | 3.1 | 30.4 | | |

| Zonal Lumen Summary | | | | |
|---------------------|--------|--------|----------------|--|
| | Zone | Lumens | % of Luminaire | |
| | 0-30 | 241 | 26.7% | |
| | 0-40 | 395 | 43.7% | |
| | 0-60 | 700 | 77.6% | |
| | 0-90 | 902 | 100% | |
| | 90-180 | 0 | 0% | |
| | 0-180 | 902 | 100% | |
| | | | | |

REL8

Input Voltage (VAC) 120 System Level Power (W) 17.9 Delivered Lumens (Lm) 1279 System Efficacy (Lm/W) 71.5 Correlated Color Temp (K) 2722 Color Rendering Index (CRI) 93, R9>50 Beam Angle 110.5 Spacing Criteria 1.28

| CCT Data Multiplier | | |
|---------------------|-------|--|
| 3000K | 1.021 | |
| 4000K | 1.042 | |
| 5000K | 1.076 | |



| Intensity Summary (Candle Power) | | | | |
|-------------------------------------|---------|--|--|--|
| Angle | Mean CP | | | |
| 0 | 439 | | | |
| 5 | 437 | | | |
| 15 | 423 | | | |
| 25 | 395 | | | |
| 35 | 353 | | | |
| 45 | 299 | | | |
| 55 | 233 | | | |
| 65 | 160 | | | |
| 75 | 86 | | | |
| 85 | 22 | | | |
| 90 | 0 | | | |
| | | | | |


| Cone of Light Tabulation | | | | | |
|--------------------------|----------------------------|--------------------|--|--|--|
| Mounted height (Feet) | Footcandles Beam Center | Diameter (Feet) | | | |
| 4 | 27.4 | 11.5 | | | |
| 6 | 12.2 | 17.3 | | | |
| 8 | 6.8 | 23.1 | | | |
| 10 | 4.4 | 28.8 | | | |

| Z | onal Lumen Summary | |
|--------|--------------------|----------------|
| Zone | Lumens | % of Luminaire |
| 0-30 | 343 | 26.8% |
| 0-40 | 563 | 44% |
| 0-60 | 1001 | 78.3% |
| 0-90 | 1279 | 100% |
| 90-180 | 0 | 0% |
| 0-180 | 1279 | 100% |
| | | |

 $Fixture\ tested\ per\ LM-79-08.\ Photometric\ data\ is\ of\ the\ performance\ of\ a\ representative\ fixture.\ Results\ may\ vary\ in\ the\ field.$



Dimensions

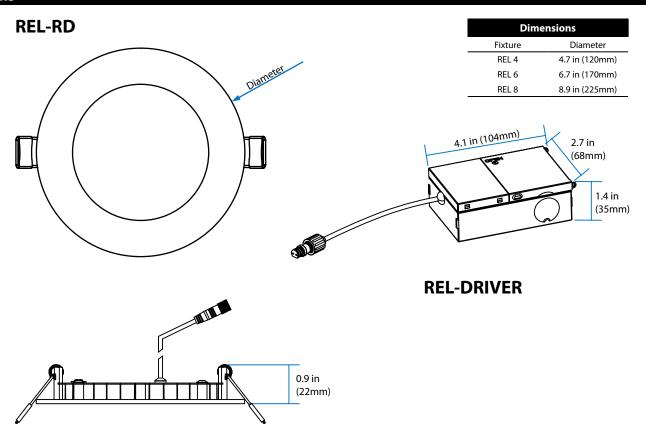

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful

interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- —Reorient or relocate the receiving antenna.
- —Increase the separation between the equipment and receiver.
- —Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 —Consult the dealer or an experienced radio/TV technician for help.

