









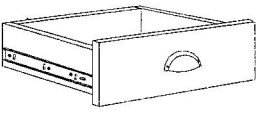











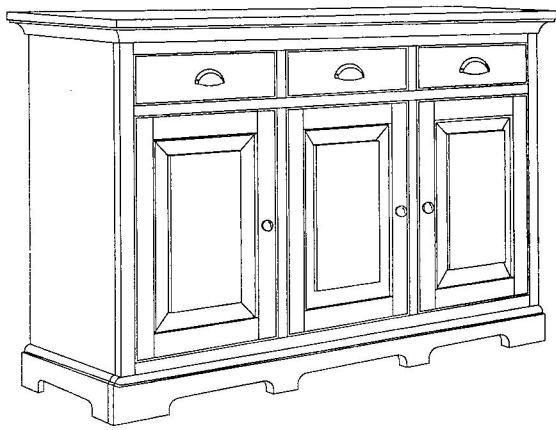


ASSEMBLY INSTRUCTION

SERVER

A Server Top Panel  1 pc	B Front Frame  1 pc	C Side Panel (Left)  1 pc	D Side Panel (Right)  1 pc
E Center Panel Left (1 pc) Right (1 pc)  2 pcs	F Back Top Rail  1 pc	G Bottom Panel  1 pc	H Back Panel  1 pc
I Side Shelf (Big)  2 pcs	J Center Shelf (Small)  1 pc	K Drawer  3 pcs	L Minifix Bolt with Housing  16 pcs
M Door Knob with PHCB Screw M4 x 25MM  3 pcs	N JCBC Bolt M6 x 40MM  15 pcs	O Flat Washer M8 x 16MM  15 pcs	P Spring Washer 5/16"  15 pcs
Q Pan Head Screw M4 X 16mm  18 pcs	R CSK Screw M4 X 32mm  10 pcs	S Shelf Stud  12 pcs	T Allen Key with Ball  1 pc
U Wooden Dowel Ø10 X 30mm  20 pcs	V Anti-Tipping Kit  1 set		




This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


IMPORTANT NOTE :

1. Do not tighten all screws / bolts until all completely assemble.
2. Keep all hardware parts out of reach of children.

- 1** Insert Wooden Dowel (U) to all dowel holes.

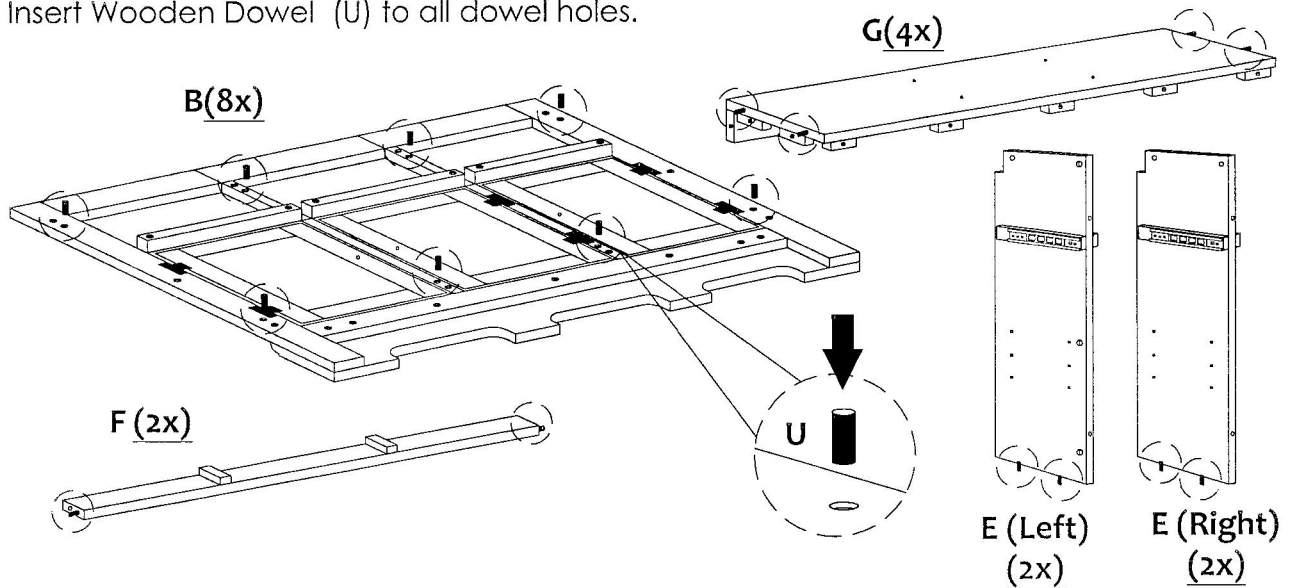


- 2** Insert Minifix Bolt (L) to all E-Nut holes with Screwdriver (not provided).

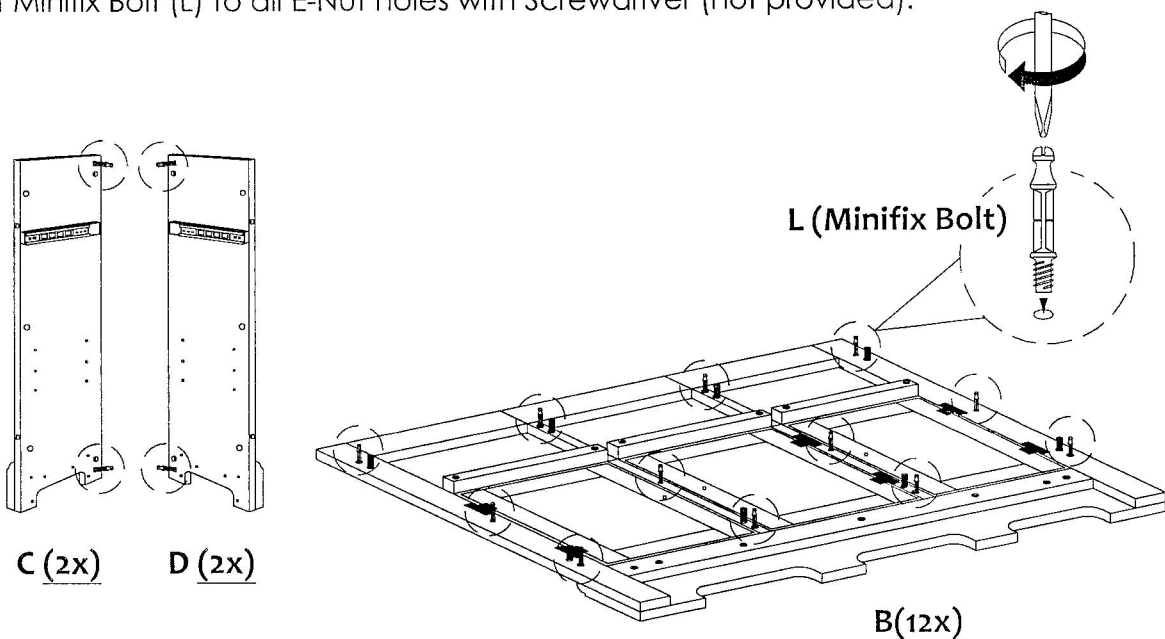


3

Insert Bottom Panel (G) to Center Panel (E) and secure it with Flat Washer (O), Spring Washer (P) and JCBC Bolt (N) and tighten with Allen Key (T).

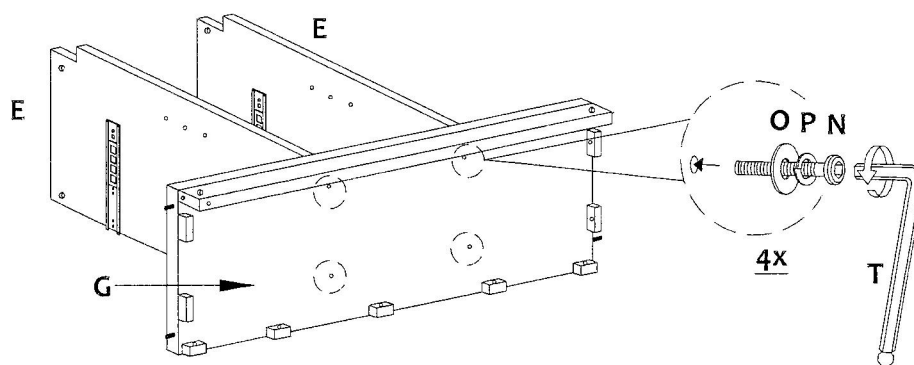


4

Gently insert Side Panel (Left) (C) to the Bottom Panel (G) and secure it with Flat Washer (O), Spring Washer (P) and JCBC Bolt (N) and tighten with Allen Key (T).

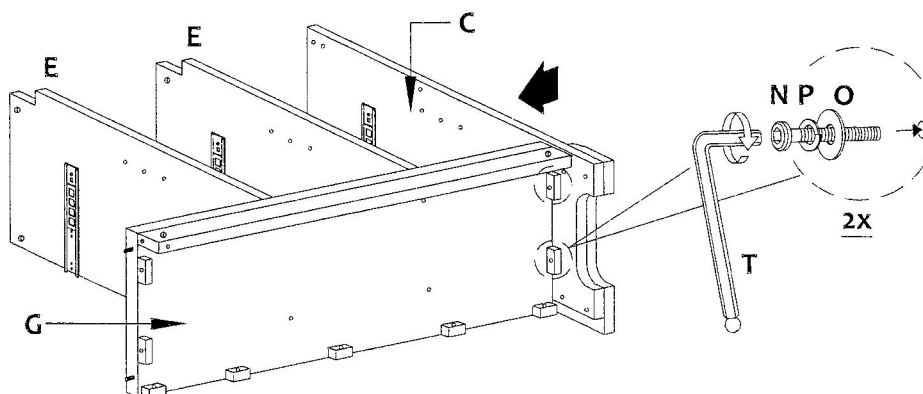


5

Place Back Top Rail (F) to Center Panel (E) and tighten it with Flat Washer (O), Spring Washer (P) and JCBC Bolt (N). Insert Minifix Housing (L) to Side Panel (Left) (C) and follow the arrow to lock it.

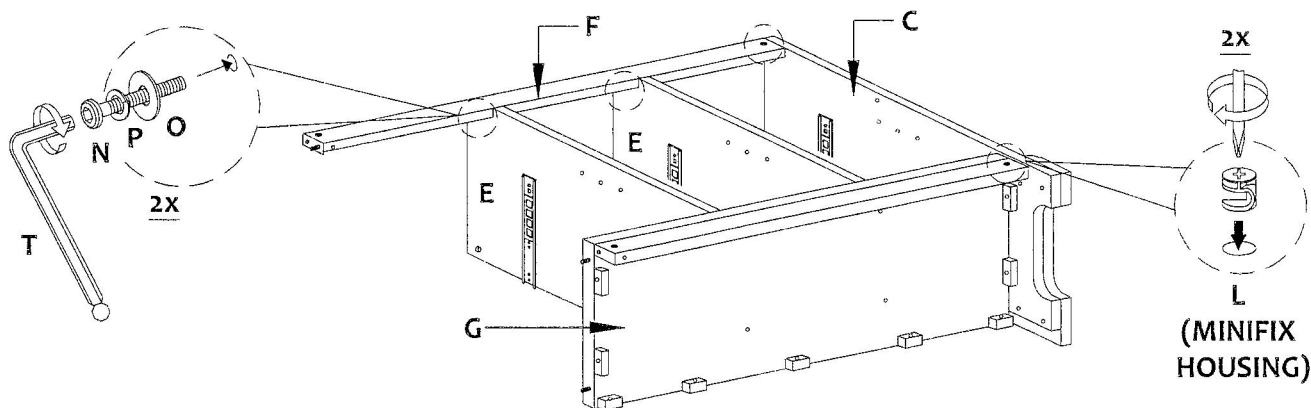


6

Insert the other Side Panel (Right) (D) to Bottom Panel (G). Secure the Bottom Panel (G) to Side Panel (Right) (D) with Flat Washer (O), Spring Washer (P) and JCBC Bolt (N) and tighten it with Allen Key (T). Insert Minifix Housing (L) to Side Panel (Right) (D) and follow the arrow to lock it.

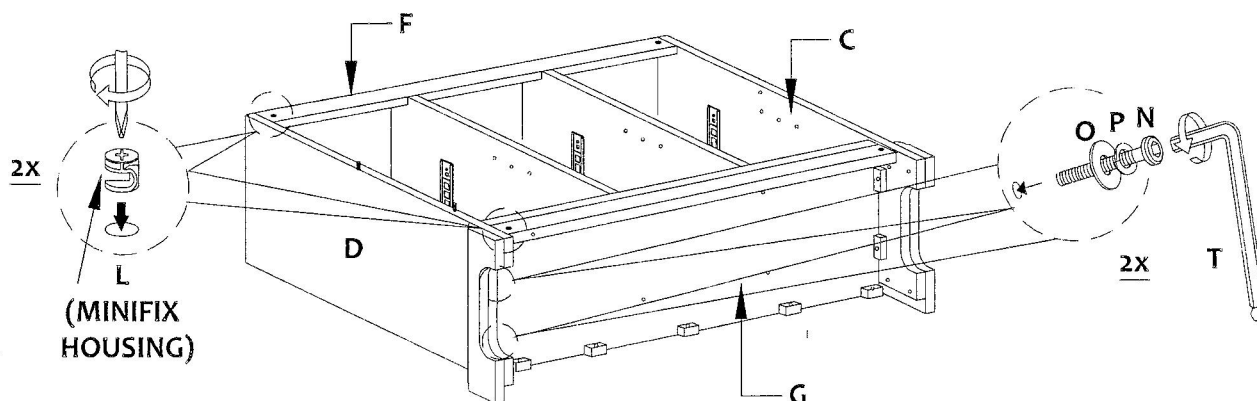


7

Turn the Front Frame (B) upside down and place it on a piece of cloth to prevent from scratching. Gently insert the semi assembled Server to the Front Frame (B). Insert Minifix Housing (L) and follow the arrow to lock it.

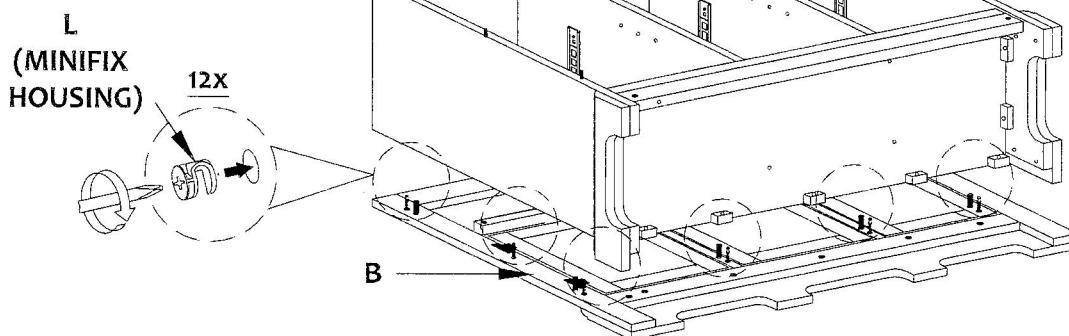


8

Secure the Bottom Panel (G) to Front Frame (B) with Flat Washer (O), Spring washer (P) and JCBC Bolt (N) and tighten it with Allen Key (T).

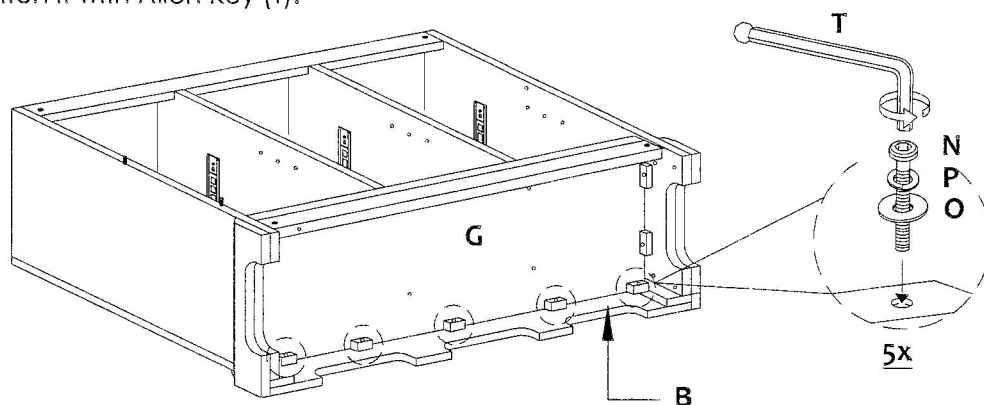


9

Insert Wooden Dowel (U) to the pre-drill holes at the Top Panel (A). Gently place the semi assembled Server to the Top Panel (A). Then, secure the Top Panel (A) with CSK Screw (R).

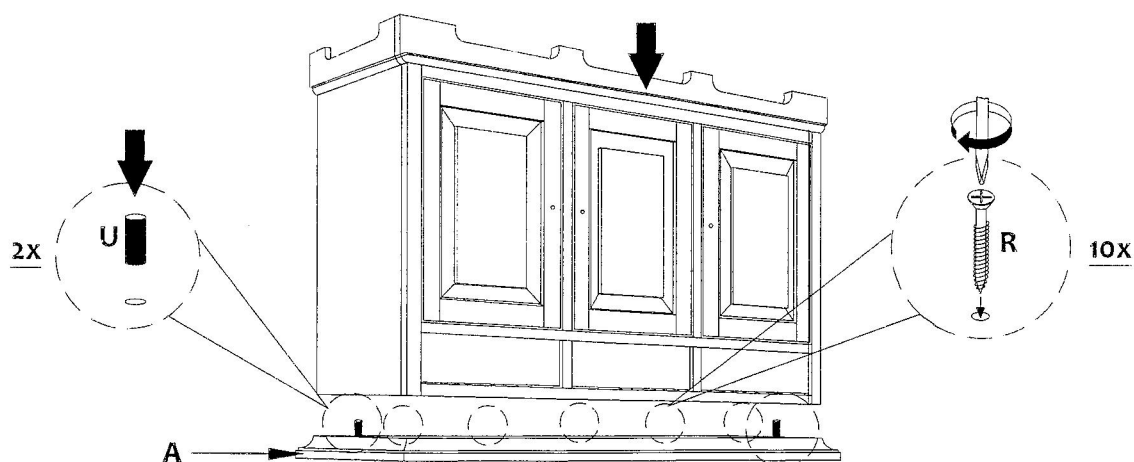


10

Place the Back Panel (H) and screw it with Pan Head Screw (Q).

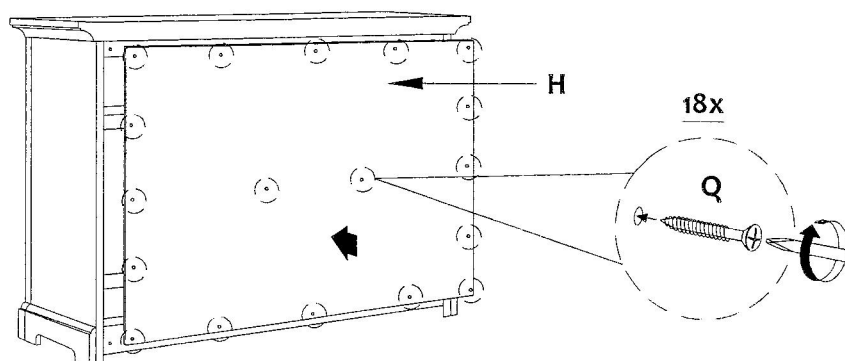


11

In order to insert the Drawer (K), pull out the drawer glide to the end. Then, gently insert the drawer.

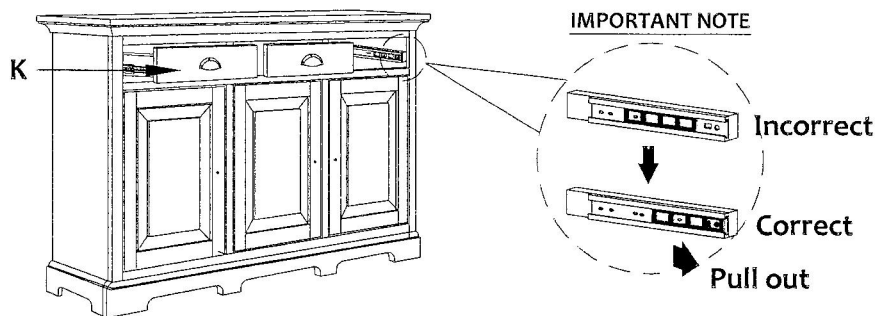


12

Insert the Shelf Stud (S) to the pre-drill holes at the Side Panel (C & D) and Center Panel (E) and place the Shelf following the note below.

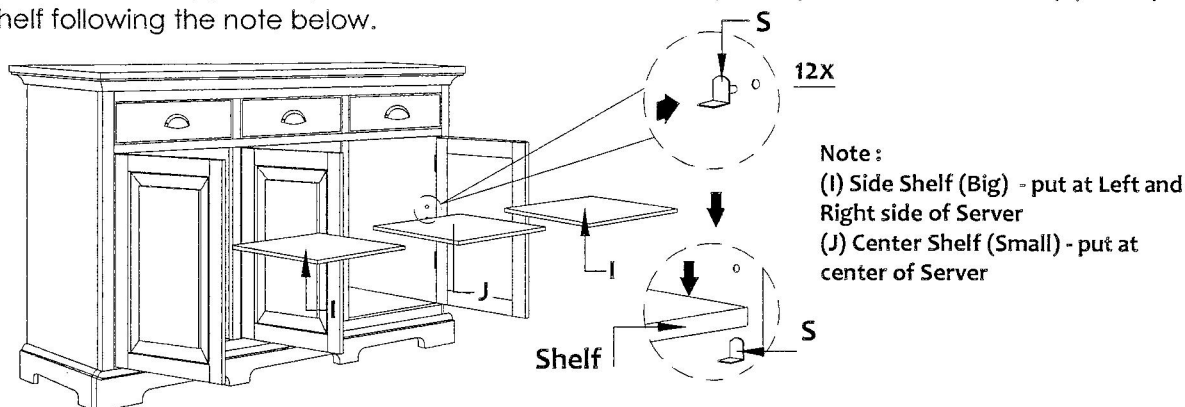


13

Attached the Door Knob (M) to the pre-drilled holes and tighten it with the screw given using Phillip Headscrowdriver.

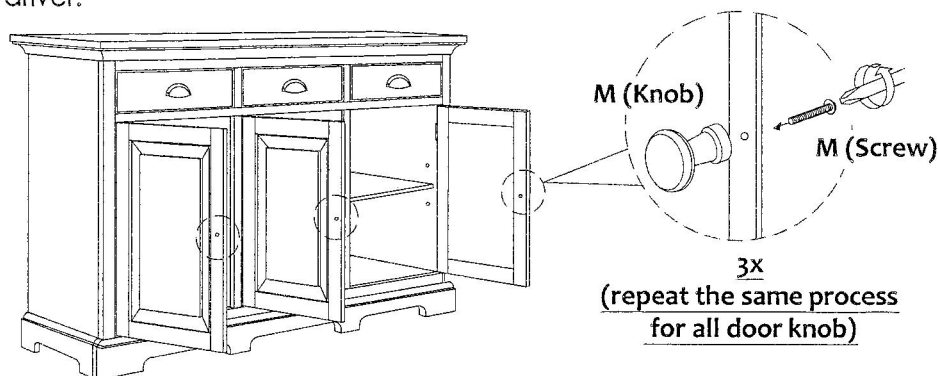

14

Attach Anti-Tipping Kit (V) to wall. Attached bracket (vertically) to wall using the long screw provided. Attach bracket (vertically) to furniture back (directly below top) with short screw. Place bracket as close to center of furniture back as possible in relation to wall stud and the desired position in the room. Move furniture to its final position. Thread the strap through bracket, pull it tight.

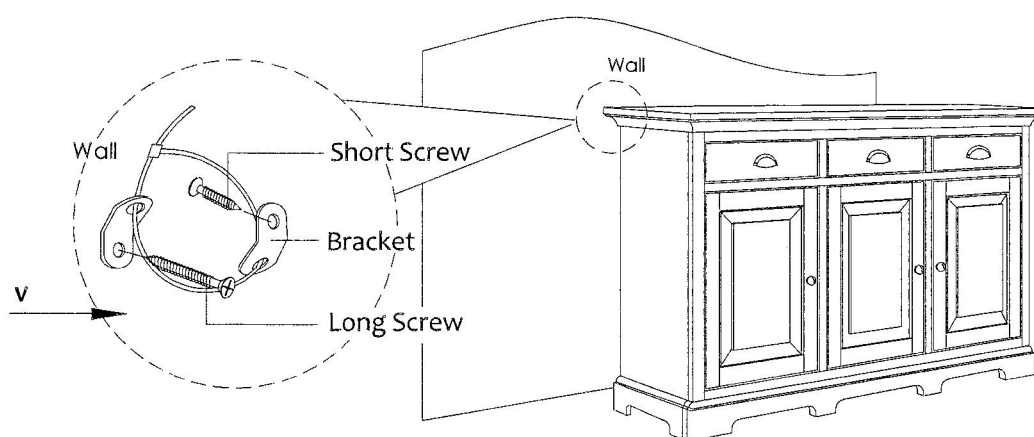

CLEANING & CARE

Treat surface with care. Surface is resistant to scratches but is not scratches resistant. Clean surface with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen overtime. Periodically check that all connections are tight.