

10 Attach the finishing trim kit

Fig. 15



There are four trim kits available to choose from



Fig. 17

For 1/2" Drywall omit spacer (a)
For 5/8" Drywall use spacer (b)
If the drywall is in excess of 5/8" add additional 1/8" spacers as needed

Attach the finishing trim kit

P/N SA63-SP-0.125



Fig. 16




Fig. 18




Fig. 19

11 Install foam dust guard.



Fig. 20

12 Recommend testing sub to assure all components are working.

13 Drywall, tape, mud, etc.

14 Safely store the supplied grille for the final assembly, If you also received the SA42-4-MOD module, store this as well.

15 If you received a SA42-4 preconstruction assembly, be sure to order the SA42-4-MOD module when ready for finishing.



Small Aperture
Installation
Video



Trim Kit
Finishing
Playlist

Freq. RESPONSE	70-24kHz ±3dB
IMPEDANCE	4 Ohms
SENSITIVITY	85dB @ 2.83V/1M
AMP RANGE	25-125 Watts
RMS POWER	50 Watts

Products suitable for use in dry outdoor environments

SA42-4

Installation guide for the SA42-4 In-Ceiling Small Aperture® Speaker

Tools Required:

- 1) #2 Phillips screwdriver or drill with #2 Phillips drill bit
- 2) Straight edge or level
- 3) Wood or drywall screws

Parts List: Supplied

- A 1 - SA42-4 or SA42-4-MOD
- B 2 - Mounting Brackets
- C 4 - 8-32 x 1/2 Pan Head Machine Screws
- D 4 - #8 Lock Washers
- E 4 - #8 Flat Washers
- F 4 - 6/32 Course Head Screws
- G 1 - Foam Dust Guard

Parts List: Supplied by Installer

- H 4 - 1.25" Wood or drywall screws

Parts: Ordered Separately

- I 1 - Trim Kit
- J Spacer Ring(s)

1 Assemble the parts

The brackets are designed to accommodate construction from 8" to 13" joist spacing (Fig. 1).

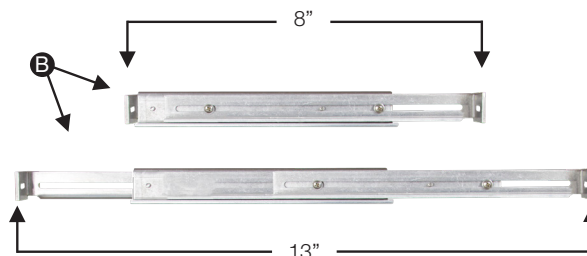


Fig. 1

2 Attach the brackets B to the speaker using the supplied 8/32 screws C lock washers D & flat washers E.

Tighten these screws just enough to allow movement for adjustment during installation.

Note: brackets can be mounted to either the sides or the ends of the speaker enclosure for added installation flexibility.

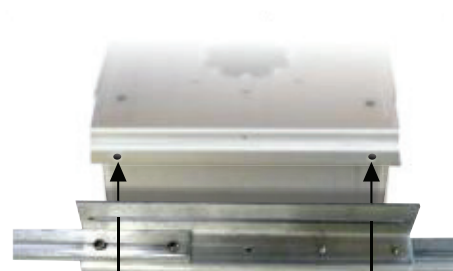


Fig. 2



Fig. 3

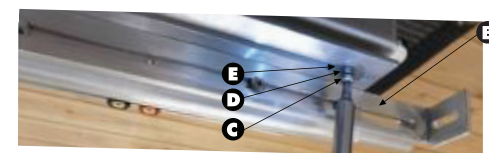


Fig. 4

3 Mount temporary holders to joists

Cut a couple of 2 x 4s or 1 x 2s, a few inches wider than the ceiling joists. Then with a couple of drywall screws, mount the temporary holders to the joists. (Drywall screws not included).

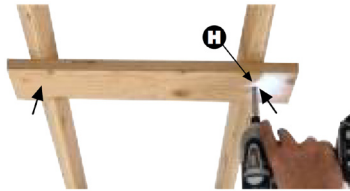


Fig. 5

These will help you hold the speaker up and make the speaker mount flush to the future drywall.

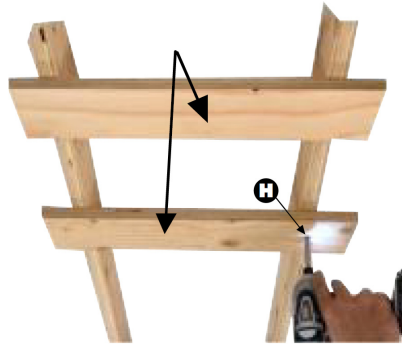


Fig. 6

4 Place the speaker on top of the temporary holders

Note: 63SA-7HO is pictured in steps 2,4,7. Procedures for SA42-4 are identical.



Fig. 7

5 Fix the brackets to the joists

Expand the bracket to fit from joist to joist (Fig. 8). Then fix to the joists using a drywall screw (Fig. 9). Make certain the bracket is flush with the joists (Fig. 10). (Drywall screws not included).



Fig. 8



Fig. 9



Fig. 10

6 Firmly secure the bracket to the speaker

Tighten screws enough to securely fix the bracket to the speaker enclosure. Be careful not to strip the threads on the brackets (Fig. 11).

You can adjust the side-to-side position of the speaker by sliding the bracket before tightening.



Fig. 11

7 Remove the temporary holders from the joists

Remove drywall screws and remove the temporary holders (Fig. 12).



Fig. 12

8 Double check that the face of the speaker is plumb with joist

Adjust if needed (loosen the bracket slightly and adjust the speaker's position up or down or as required (Fig. 13).



Fig. 13

9 Strip and splice wires together using wire nuts

Minimum 18-gauge wire, heavier gauges for longer wire runs.



Fig. 14