

# PEN

## 18" LED Fan Pendant

### Product Description

Clean lines and architectural elements combine in this timeless design defined by a beautifully angular shade and smooth white acrylic diffuser.

#### Construction

- High quality steel housing
- Suitable for Damp Location
- Included mounting hardware

#### Optical System

- Frosted diffuser delivers low glare without sacrificing lumens
- CCT = 3000K
- CRI = 80

#### Electrical

- Long-life LED system coupled with electrical driver to deliver optimal performance.
- Operating temperature rating of 0°F to 104°F (-18°C to 40°C)
- Input voltage of 120VAC

#### Mounting and installation

- Mounts to any 4" junction box
- Three support cables attached to canopy cover
- 47" power drop integrated to cover
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the fixture or electrical distribution panel

#### Finish

- Brushed nickel finish

#### Warranty

- 5-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge.)

### Fixture Data


Input Voltage (VAC)	120
System Level Power (W)	18
Delivered Lumens (Lm)	860
System Efficacy (Lm/W)	47.8
Correlated Color Temp (K)	3000
Color Rendering Index (CRI)	80

Project

Catalog

Type

Date

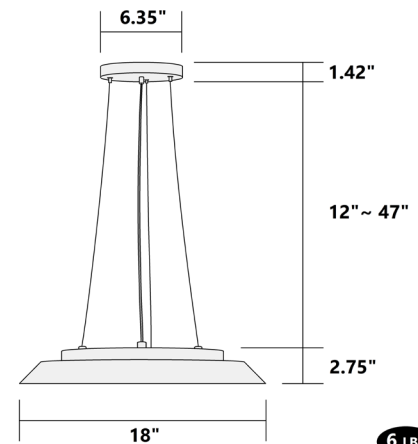

### Ordering Information

Example: PEN-1-120-12-3K-BNK

Series	Version	Input Voltage		CCT	Finish
PEN	1	120 (120VAC)	12	3K (3000K)	BNK (Brushed Nickel)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.