TOTO_®

MW4363046CEMFGN(A)

Aquia IV Cube® WASHLET®+ S500e Two-Piece Toilet - 1.28 & 0.9 GPF

FEATURES

- Concealed supply connection for seamless installation
- DYNAMAX TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.28 & 0.9 GPF (4.8 & 3.4 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Completely skirted design for a sleek and understated look that's easier to clean
- UNIVERSAL HEIGHT
- Chrome plated trip lever
- 12" Rough-in
- Elongated front bowl and WASHLET+ S500e and tank set
- EWATER+® auto-cleans wand and bowl
- On-demand remote function cleans wand with EWATER+
- PREMIST® of bowl before each use
- Remote control operated
- Auto flush available as upgrade

MODELS

MW4363046CEMFGNA (#01)

With CEFIONTECT ceramic glaze, WASHLET+ S500e with contemporary design and Auto Flush

CT446CEFGNT40

Elongated bowl with CEFIONTECT

- ST436EMNA
 - Tank and cover only
- SW3046AT40
 - WASHLET+ S500e
- THU765
 - Auto Flush Kit
- 9AU321-A
- MW4363046CEMFGN (#01)

Same as MW4363046CEMFGNA without Auto Flush

OPTIONAL COMPONENTS

- TSU48.10
 - 10" Unifit Rough-In
- TSU48.14
 - 14" Unifit Rough-In

COLORS/FINISHES

#01 Cotton













PRODUCT SPECIFICATION

The two-piece, ultra high-efficiency, DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.28 GPF/0.9 GPF. Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, UNIVERSAL HEIGHT, complete skirted bowl and chrome trip lever. Toilet shall be TOTO Model MW4363046CEMFGN #01.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense,
 State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements
- ADA compliant for MW4363046CEMFGNA or when trip lever installed on the approach side.







Aquia IV Cube® WASHLET®+ S500e Two-Piece Toilet - 1.28 & 0.9 GPF

SPECIFICATIONS


Water Use	1.28 & 0.9 GPF (4.8 & 3.4 LPF)
Flush System	DYNAMAX TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	7" x 5"
Trap Diameter	2-1/4"
Rough-in	12" (10" and 14" options available)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	CT446CEFGNT40 83 lbs. ST436EMNA 29 lbs.
Shipping Dimensions	CT446CEFGNT40 29-5/8" L x 16-3/8" W x 19-3/4" H ST436EMNA 17-1/4" L x 7-1/8" W x 15-1/4" H

See SW3046AT40 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES


Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

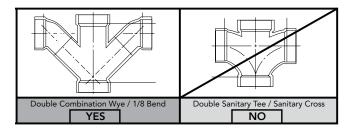

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

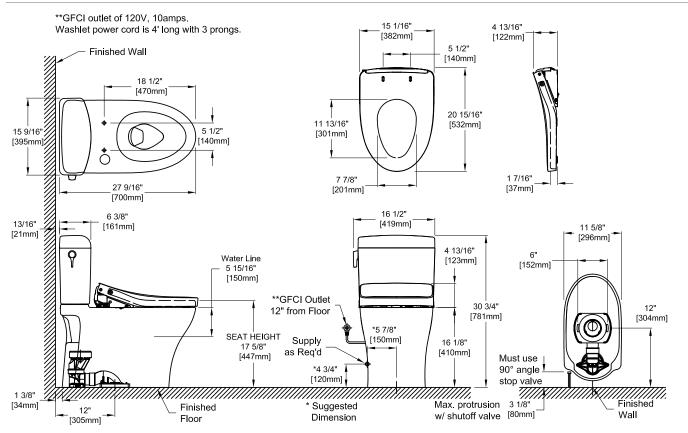

TOTO_®

These dimensions and specifications are subject to change without notice