

CAUTION: Read instructions carefully and turn electricity off at main circuit breaker panel before beginning installation.

2600-XXXWB, 2610-XXXWB


WARNING - If any Special Control Devices are used with this Fixture, Follow the Instructions Carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a Qualified Electrical Contractor.

WARNING - This product contains chemicals known to the State of California to cause cancer, birth defects and /or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.

CAUTION - All glass is fragile, use care when handling Glass Shade and lamps.

FOR USE WITH P2500,P2501,P2524 AND P2525. CAN BE USED WITH P2502 INDOORS ONLY.

- 1.- Remove the Switch Housing Cover (1) by removing the three Mounting Screws (2).
- 2.- Carefully pull down Blue and White Wires from the Switch Housing (3) (labeled "For Light Kit Connection"). Connect Light Kit Wires (4) to Switch Housing Wires (5) (Black to Blue and White to White) by connecting male to female Quick Connects (6). Take care to align tabs for secure fit.
- 3.- Align the screw holes of the Light Kit (7) with the screw holes of the Switch Housing (3) and secure with the three Screws (2) removed in step 1.
- 4.- Insert Glass Shade (8) into Fitter (9) by carefully squeezing the Spring Clips (10) on the Light Fixture Socket and gently sliding the Glass Shade (8) over the Spring Clips (10). Make sure the Glass Shade (8) is fully inserted into the Fitter (9) for a secure fit. Repeat for the remaining Glass Shades. (To remove the Glass Shades gently slide the Shade partially from the Socket and squeeze the exposed Spring Clips. Remove the Shade and release the Spring Clips.)
- 5.- Install Lamps (11).

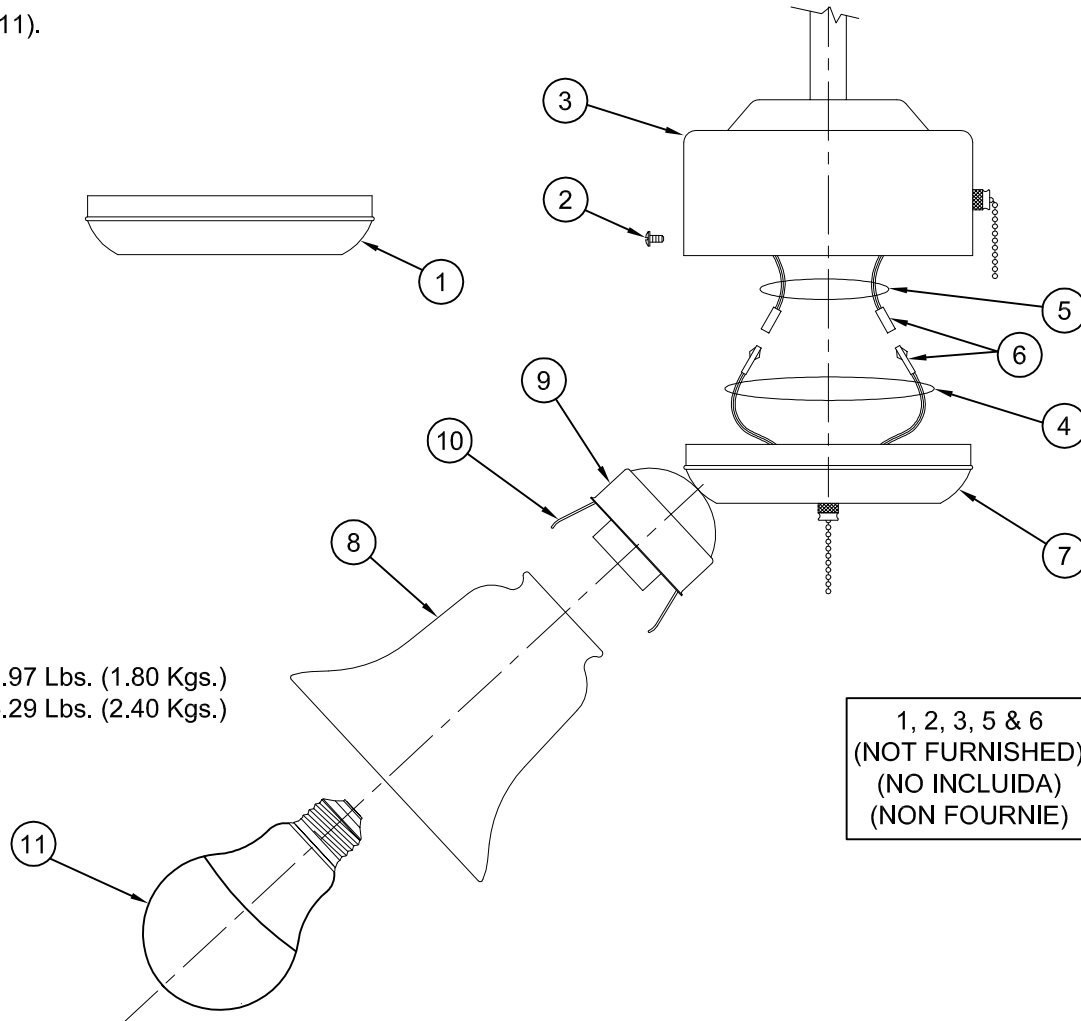

Net Weight:
2600-XXXWB = 3.97 Lbs. (1.80 Kgs.)
2610-XXXWB = 5.29 Lbs. (2.40 Kgs.)

1, 2, 3, 5 & 6
(NOT FURNISHED)
(NO INCLUIDA)
(NON FOURNIE)