

Desk Assembly — Custom Top and Fixed Height Base

Your Desk Assembly will arrive in two boxes. Accessories will arrive in additional boxes.

WARNING: Keep small parts and plastic away from children. Unpacking and assembly of the desk top requires two adults.

Tools Required




Hex key
(provided)



Phillips-head screwdriver
for accessories only
(not provided)



1 Unpack all parts. For protection, keep the white foam sheet attached to the face of the Desktop during assembly. Lay Feet and Legs down flat - do not stand them upright. With two people, place the Desktop face down on a clean, flat surface.

Bottom view
of Desktop


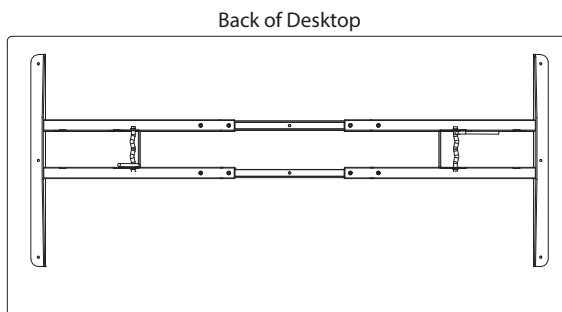


2 Locate one Leg. Position the leg so the tabs align with the slots in the Frame. Set the Leg into the Frame.

3 Push the Leg so it slides out as shown. Push the Quick Release Lever down to lock the Leg in place.

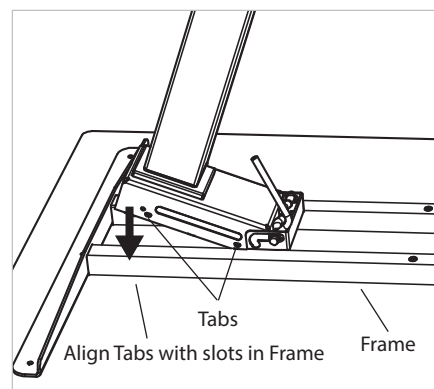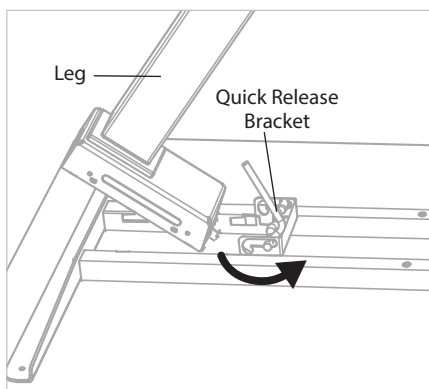



4 Locate a Foot and four M6 x 35mm bolts. Align the holes on the Foot with the holes on the bottom of the Leg. Make sure the Foot is installed so the longer section of the Foot Leg faces the front of the Desktop. Use the hex key provided to tighten the four bolts.

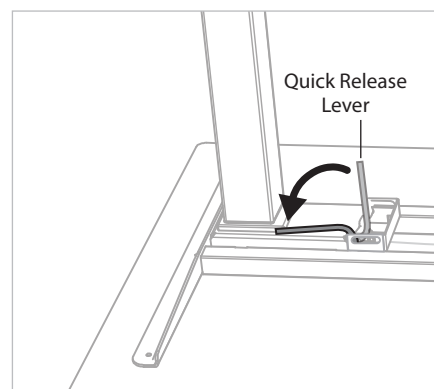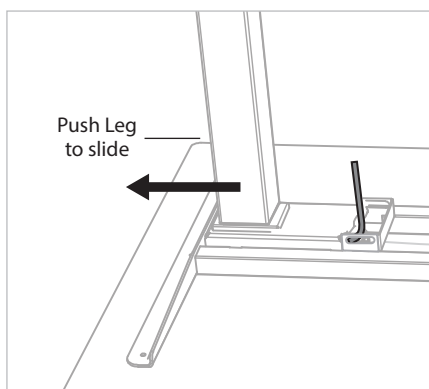

5 Repeat steps 2-4 for the second leg.

6 If other Accessories need to be assembled, refer to opposite page to reference the Desktop Accessory Diagram for locations and instructions.

7 With two people, turn the fully assembled desk onto its feet.

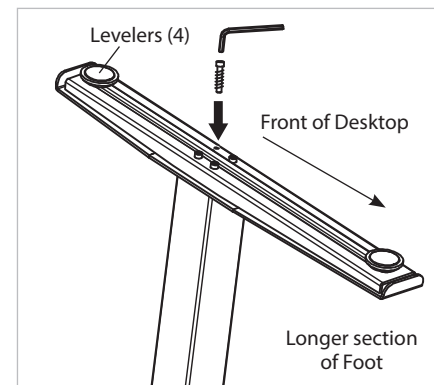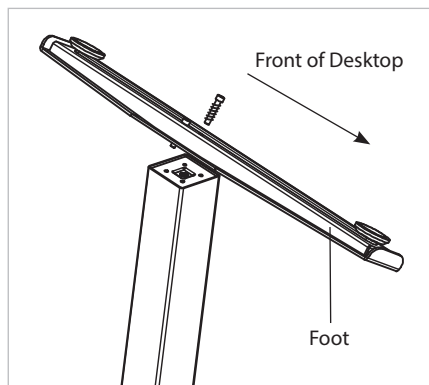

Easy Assembly — Accessories

Desktop Accessory Diagram

Match the specific desk diagram to your Hekman desk part number to correctly locate the predrilled holes for your Accessories. Note that a few Accessories have optional locations to best suit your needs.



A Wire Management Tray




B1, B2, B3, B4
Deluxe Charging Station
four location options.
Front left or right, back
left or right.




C Keyboard Tray

28488 Hekman Fixed Height Desk


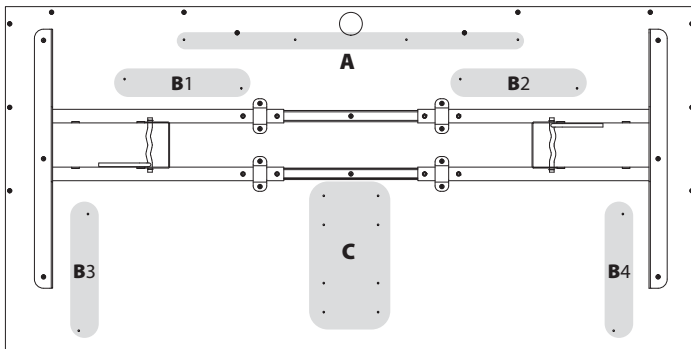


28489 Hekman FIXED Height Desk

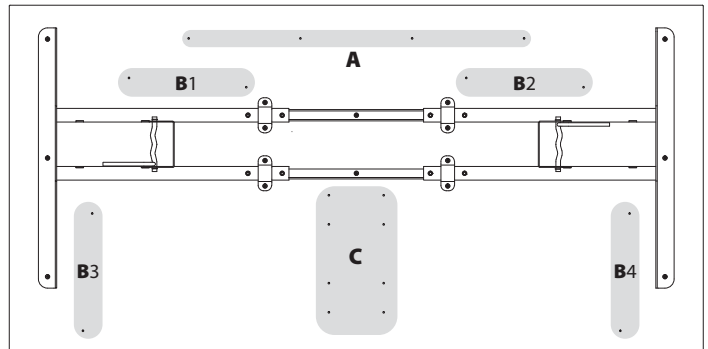


Wire Management Tray Assembly

Attach the Wire Management Tray using the screws provided. Refer to the Desktop Accessory Diagram for the predrilled holes in location D.

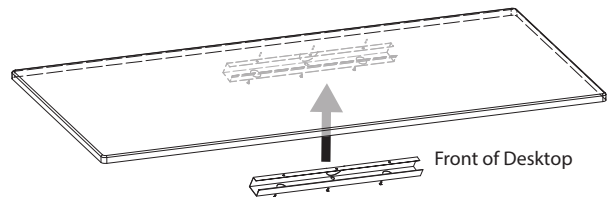

Deluxe Charging Station

Attach the Deluxe Charging Station using the screws provided. Refer to the Desktop Accessory Diagram for the predrilled holes in location E.

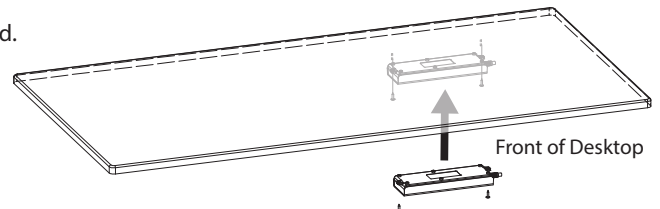

Keyboard Tray

Attach the Keyboard Tray following the detailed instructions that shipped in the keyboard tray carton. Refer to the Desktop Accessory Diagram for the predrilled holes in location H.

