






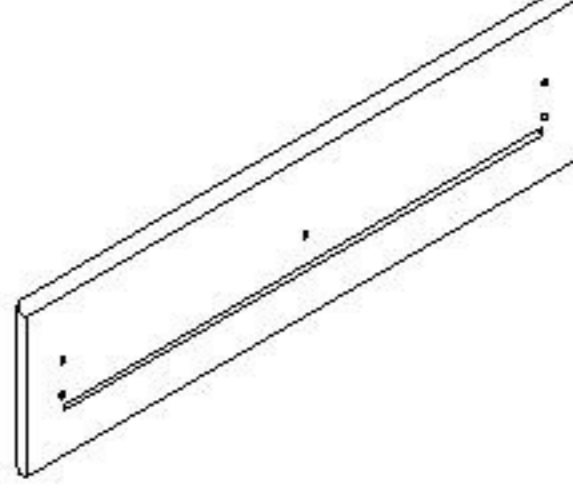


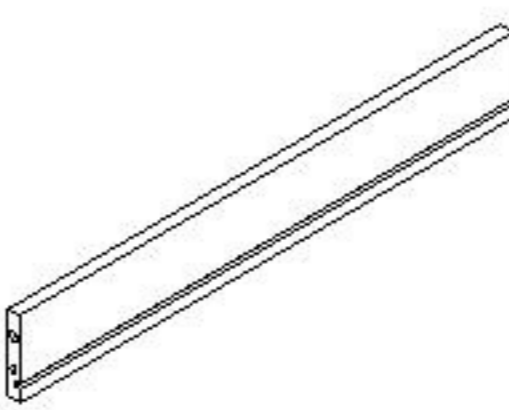
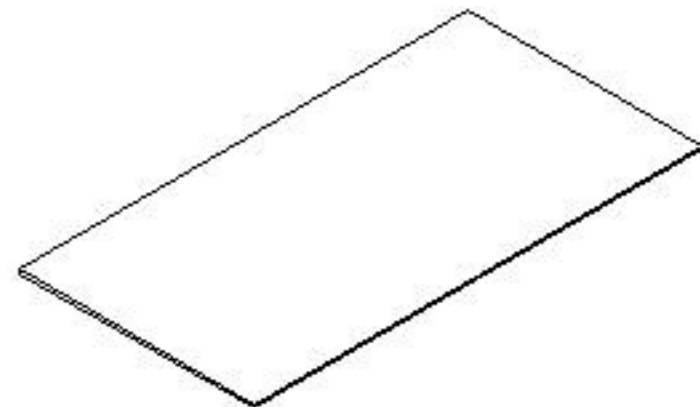
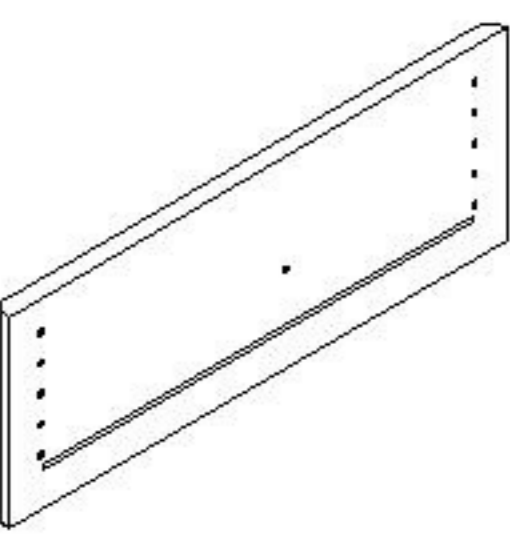
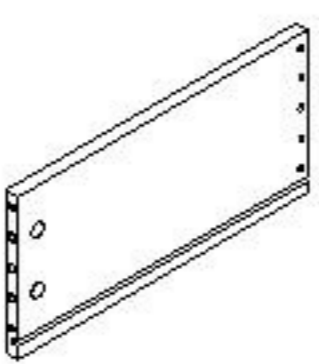
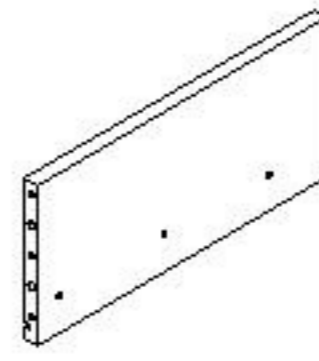
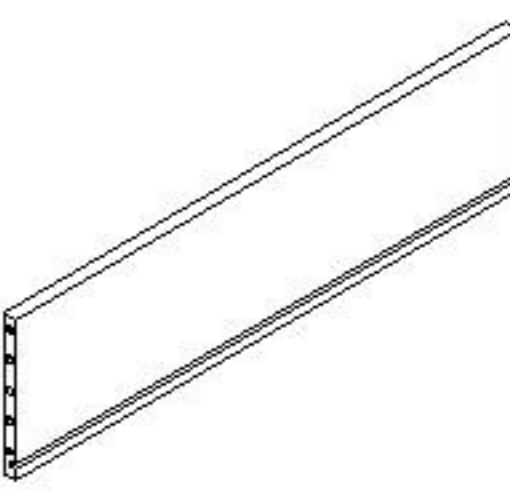
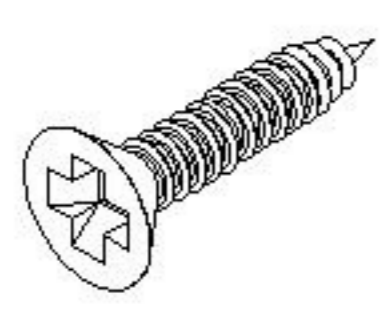
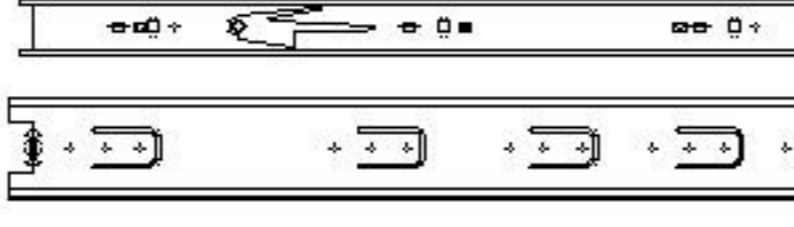
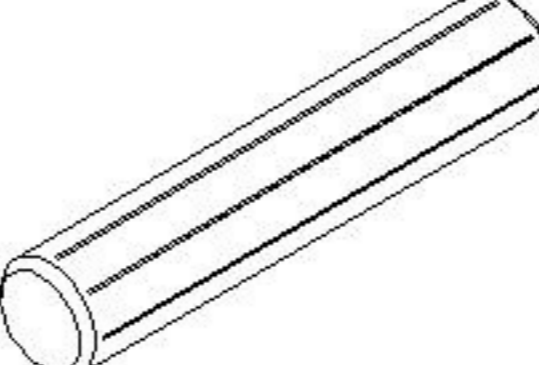
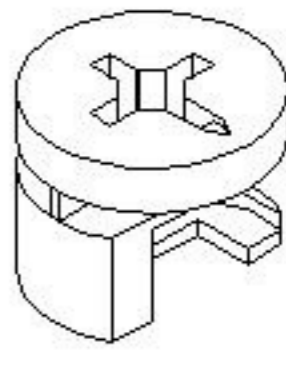
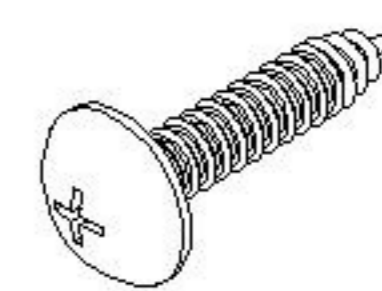
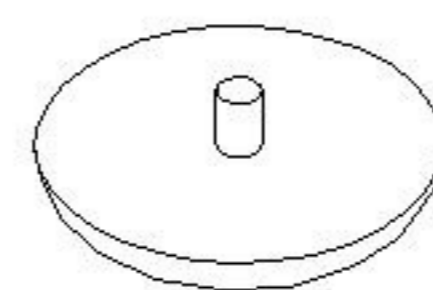
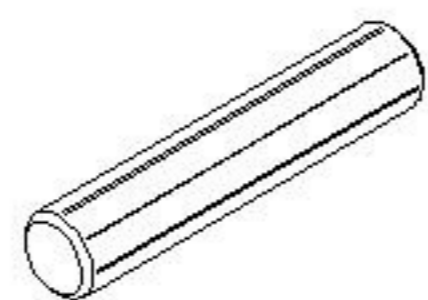
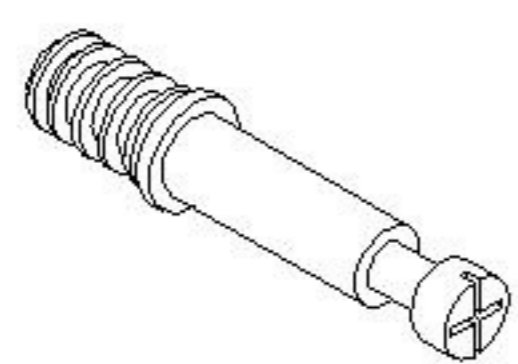


# ASSEMBLY INSTRUCTION

## 5-DRAWER CHEST

<b>A</b> Top Panel	<b>B</b> Left Side Panel	<b>C</b> Right Side Panel	<b>D</b> Bottom Frame
			
1pc	1pc	1pc	1pc
<b>E</b> Center Bar	<b>F</b> Back Plywood	<b>G</b> Post	<b>H</b> Small Drawer Front
			
2pcs	1pc	4pcs	2pcs
<b>I</b> Small Drawer Side (Left)	<b>J</b> Small Drawer Side (Right)	<b>K</b> Small Drawer Back	<b>L</b> Drawer Base
			
2pcs	2pcs	2pcs	5pcs
<b>M</b> Big Drawer Front	<b>N</b> Big Drawer Side (Left)	<b>O</b> Big Drawer Side (Right)	<b>P</b> Big Drawer Back
			
3pcs	3pcs	3pcs	3pcs
<b>Q</b> Screw M3*16mm	<b>R</b> Extension Runner 350mm	<b>S</b> Dowel M8*35MM	<b>T</b> Cam Lock 15*12
			
60pcs	5sets	12pcs	44pcs

<b>U</b> Cam Bolt 5*25	<b>V</b> Dowel M6*30mm	<b>W</b> Cam Lock Cover 17*5	<b>X</b> Panhead Screw M4*16mm-Black
---------------------------	---------------------------	---------------------------------	---

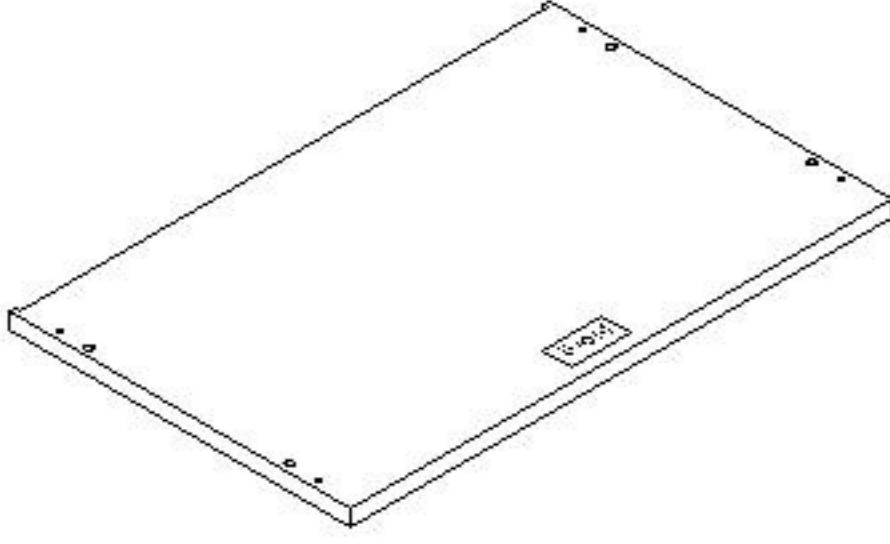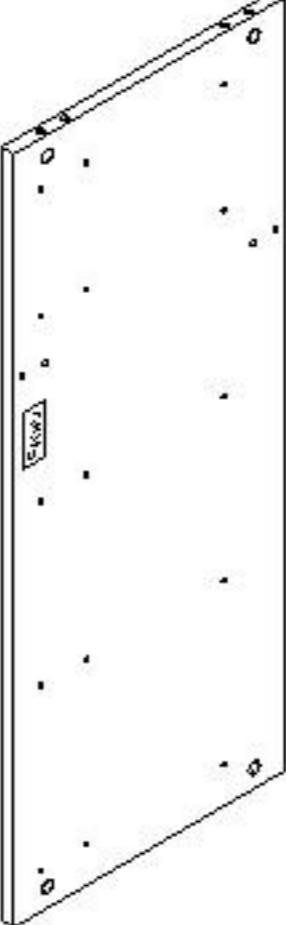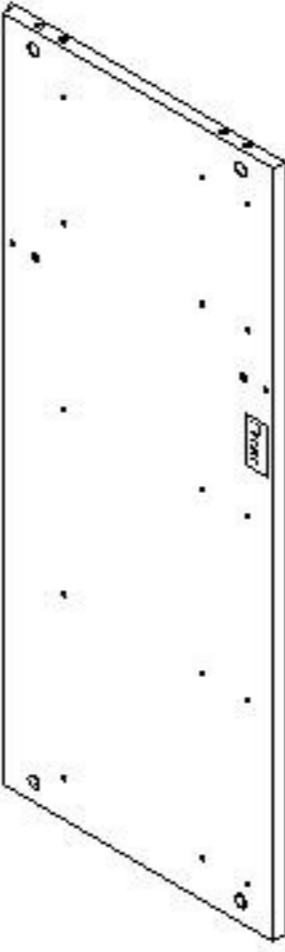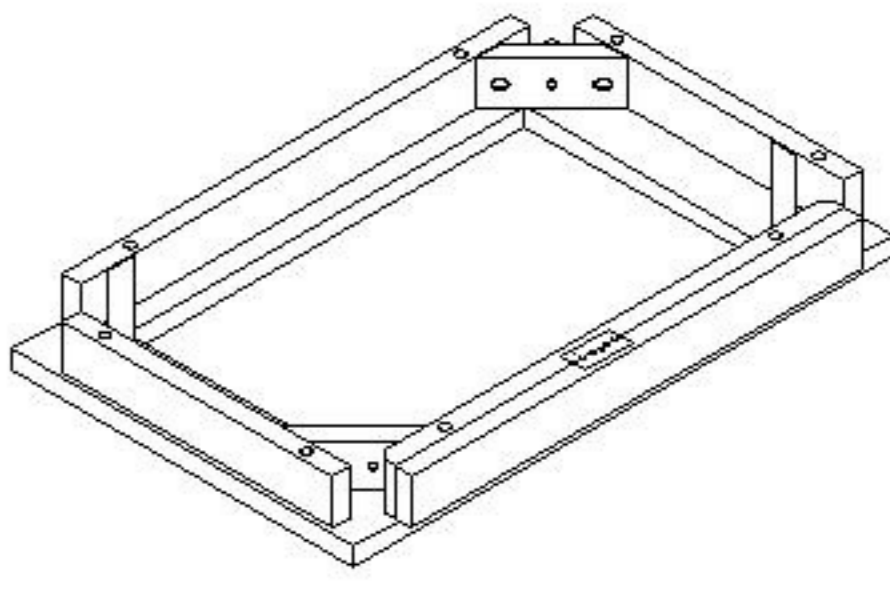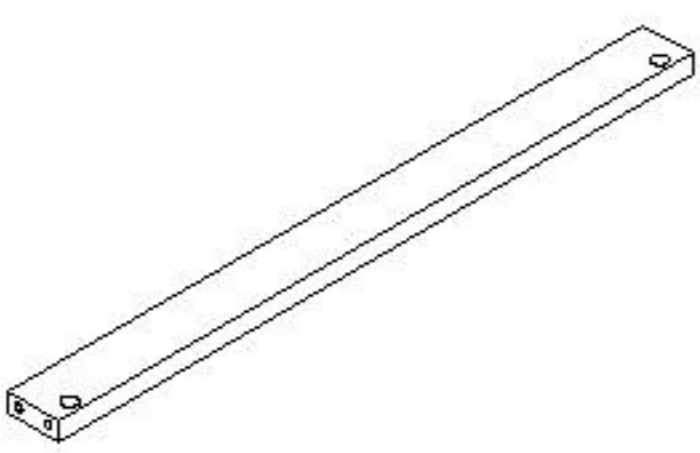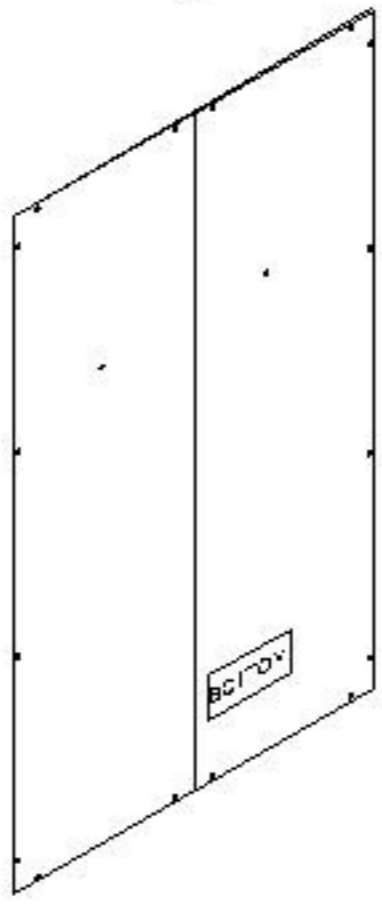





44pcs

44pcs

44pcs

18pcs

<b>Y</b> Flat Washer M8	<b>Z</b> Spring Washer M8	<b>AA</b> JCBC Bolt M6*60mm	<b>AB</b> Allen Key M4
----------------------------	------------------------------	--------------------------------	---------------------------

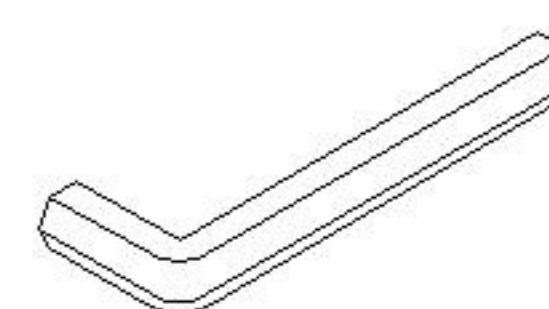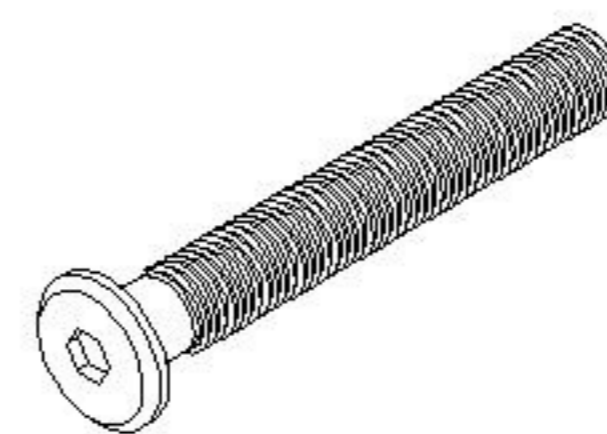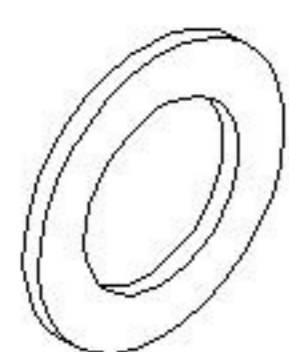




4pcs

4pcs

4pcs

1pc


<b>AC</b> Handle	<b>AD</b> Panhead Screw M4*25mm	<b>AE</b> Anti-Tipping Kit
------------------	------------------------------------	----------------------------

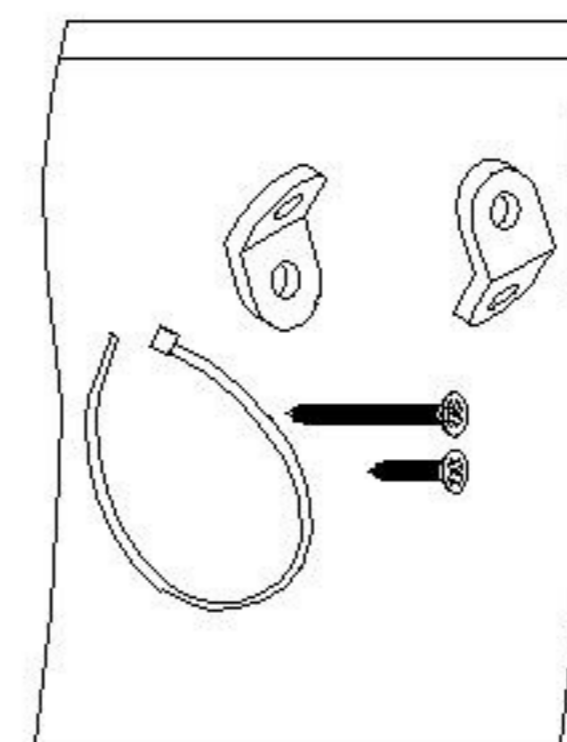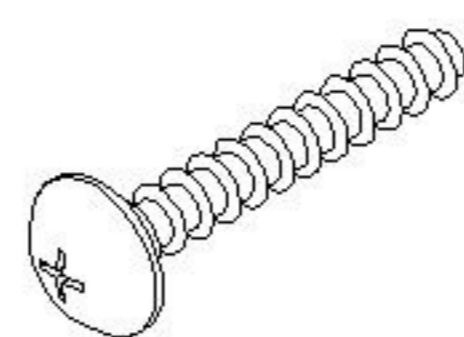

5pcs

5pcs


1set

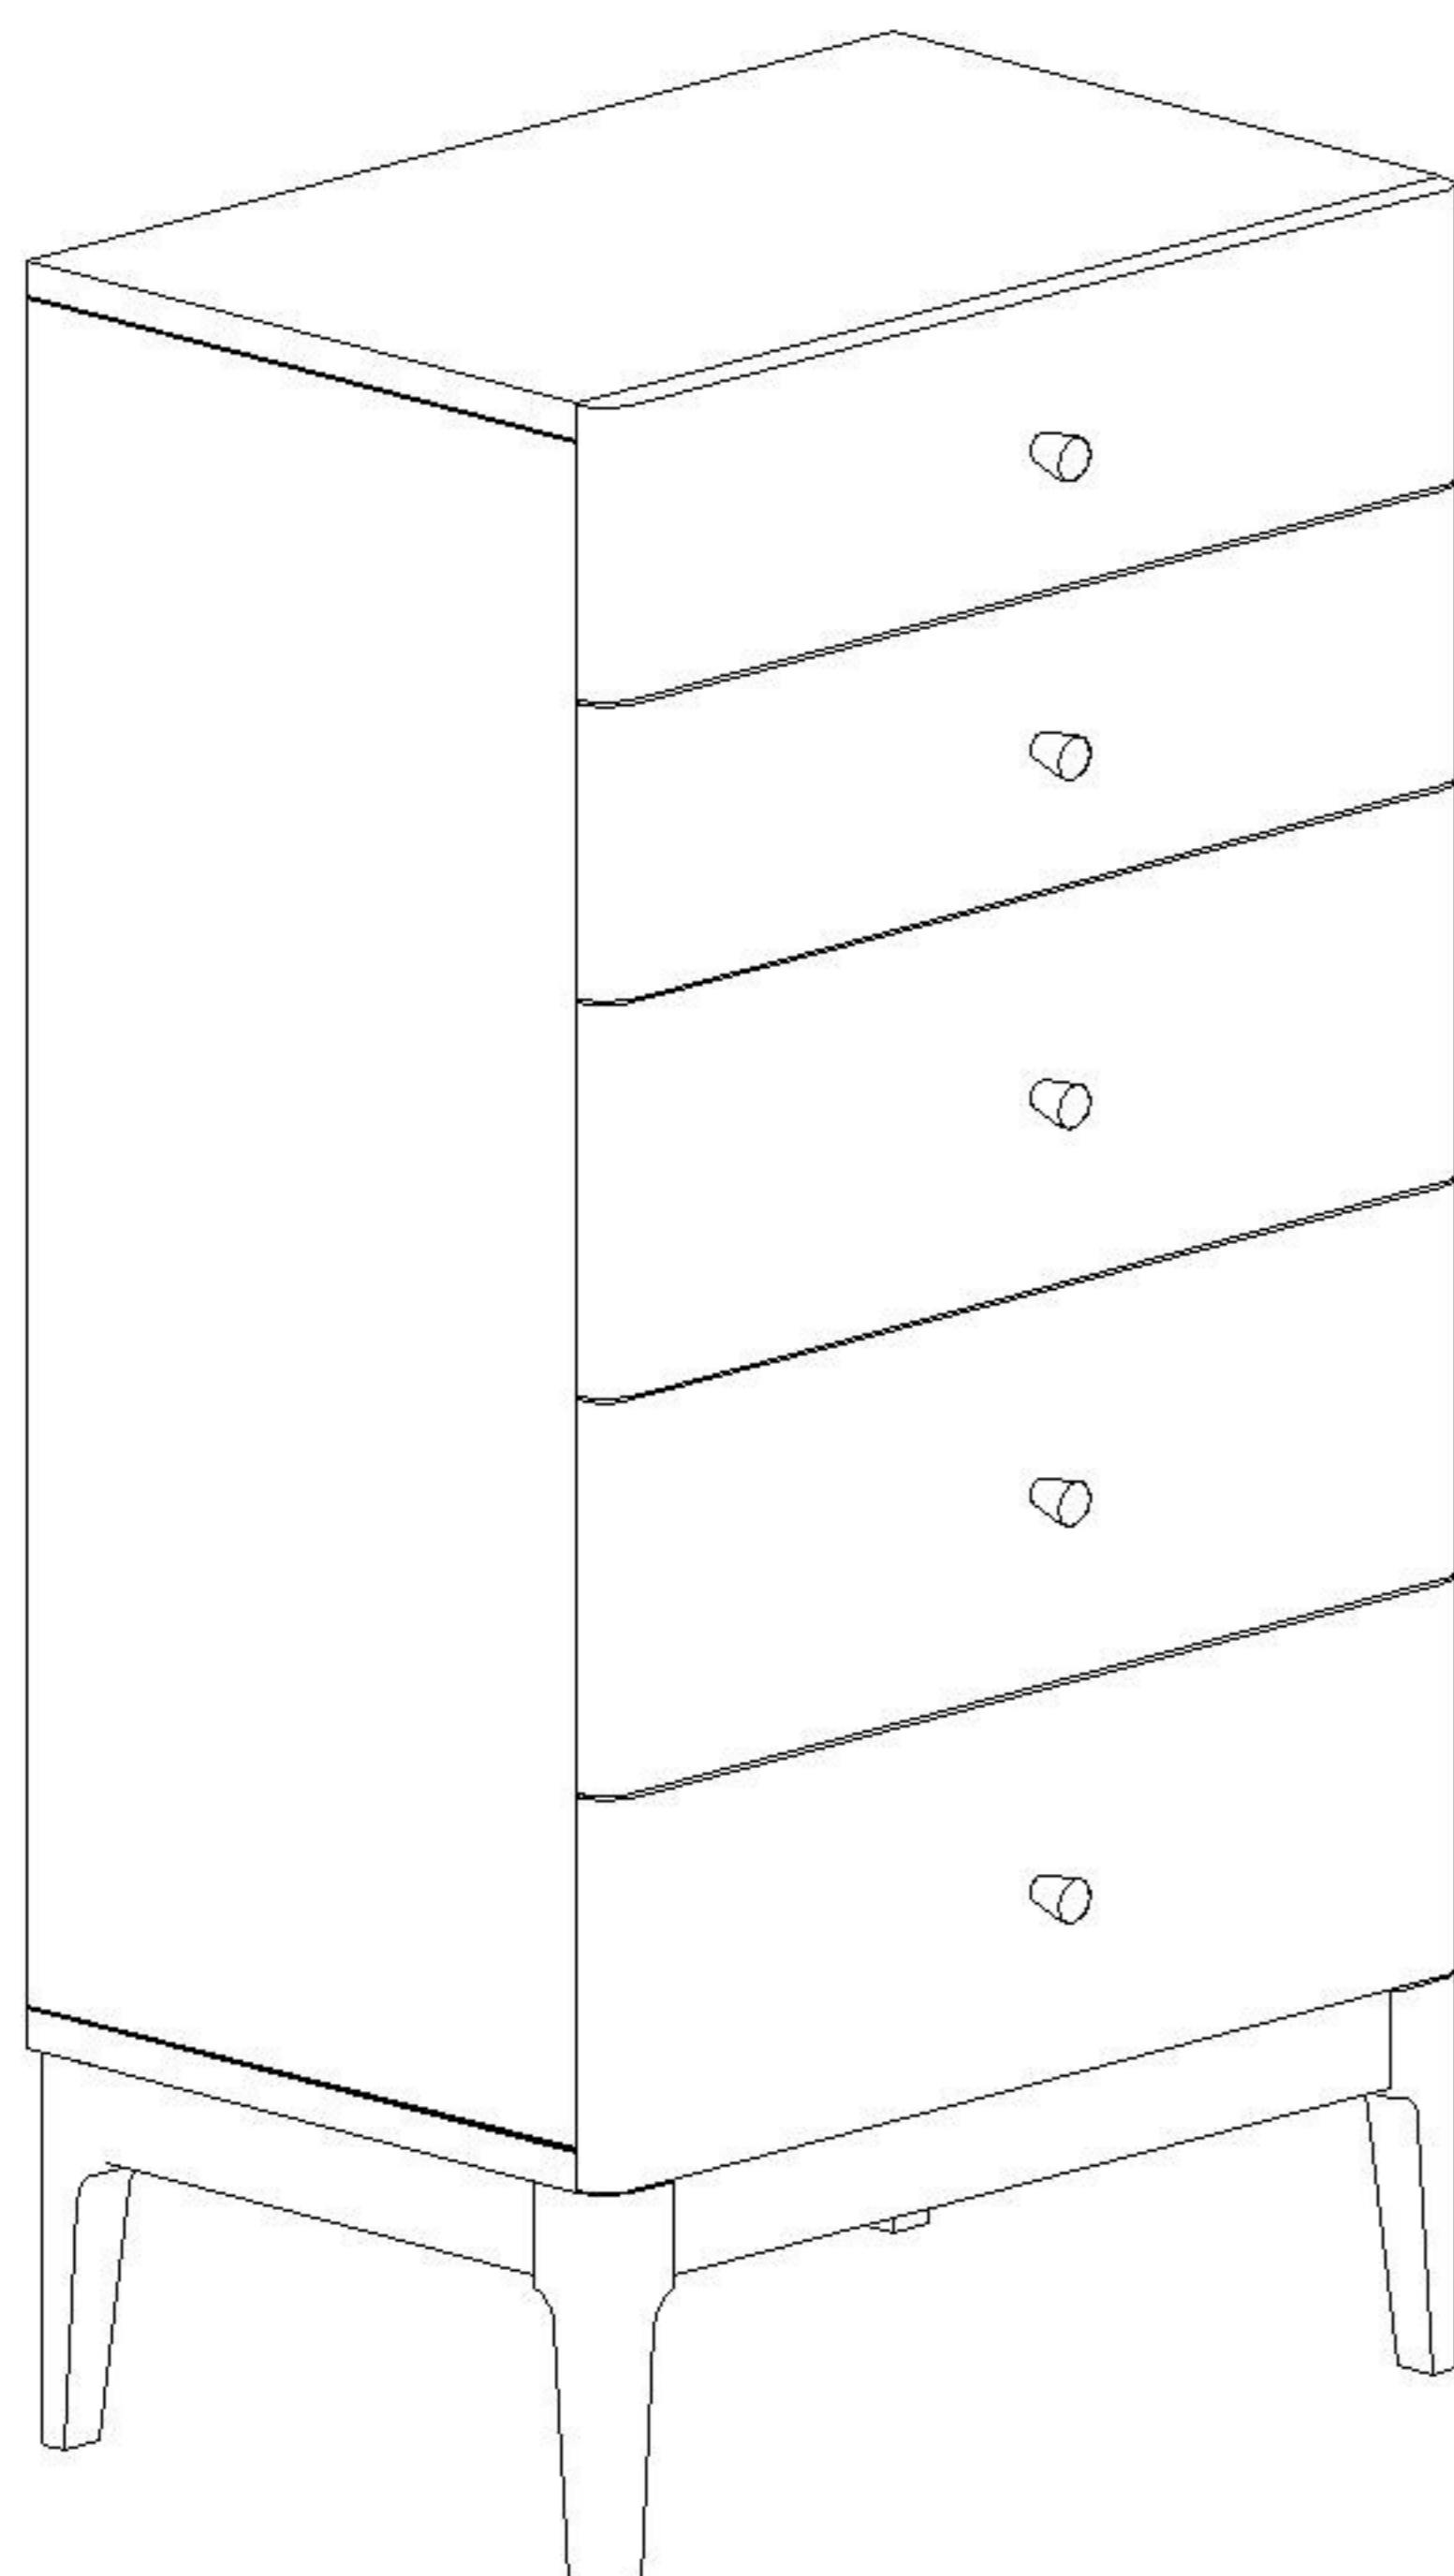

This pages lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

1


Insert and secure Cam Bolt (U) to Top Panel (A).

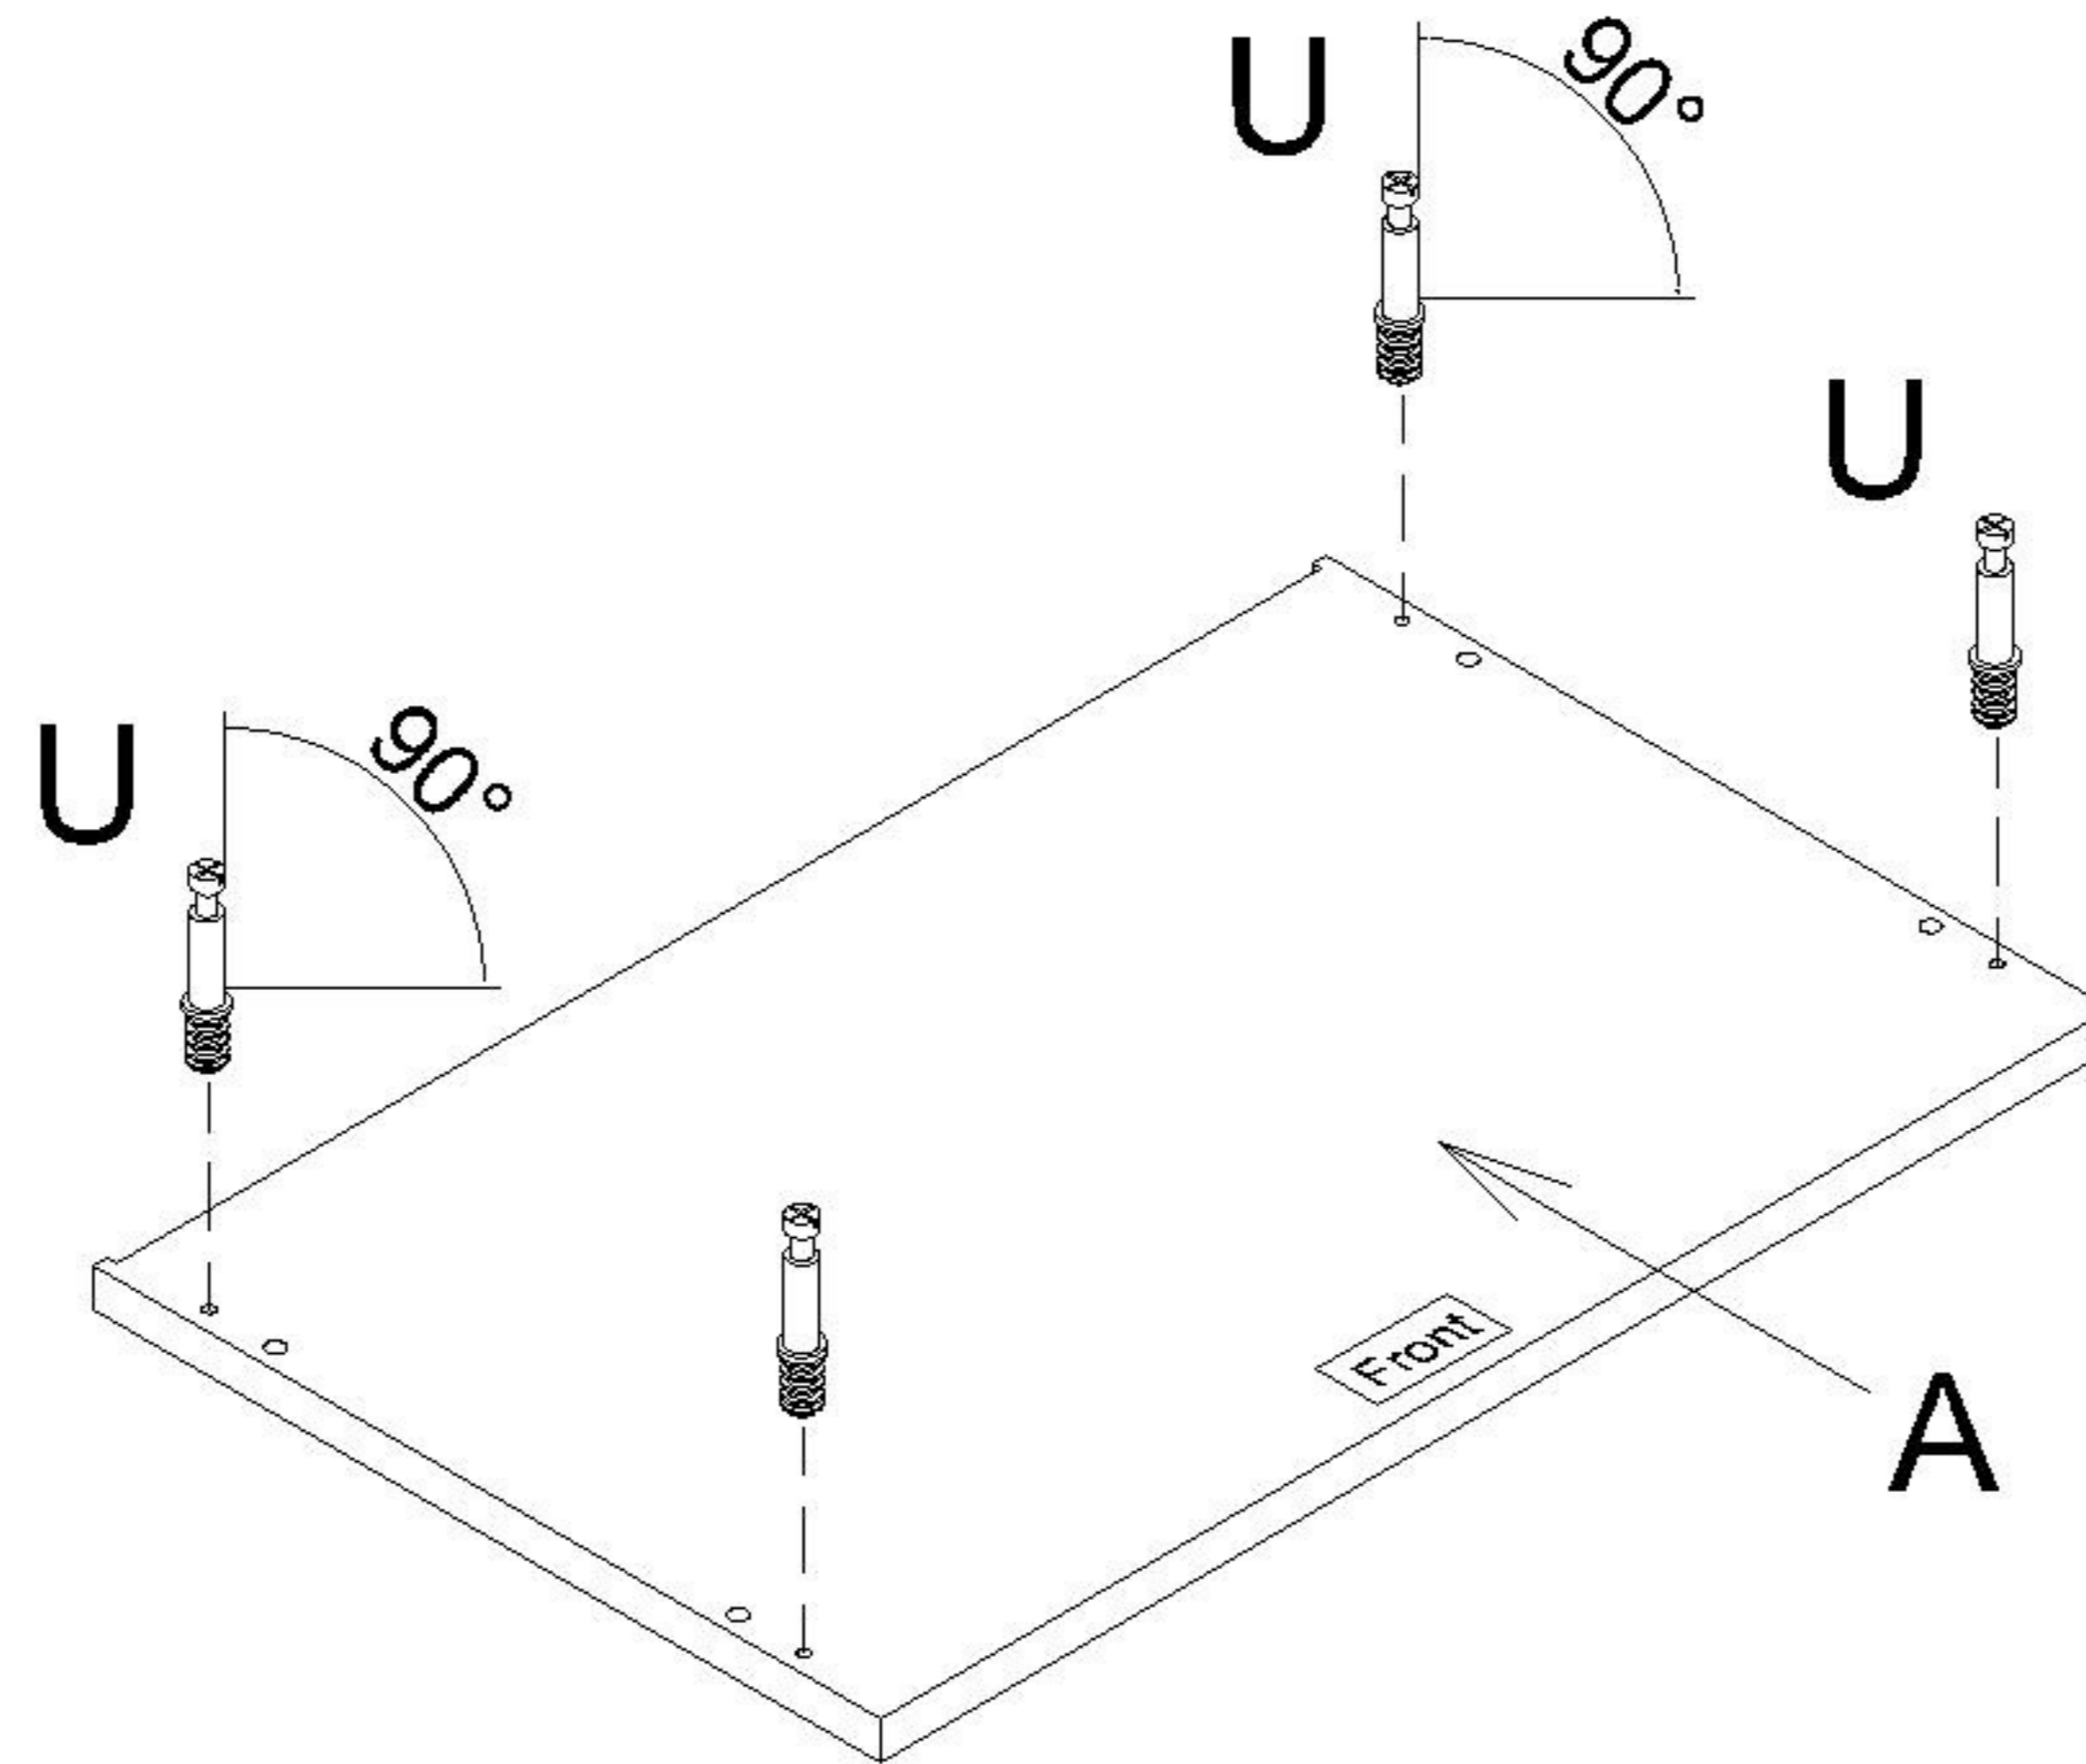

2

Insert Dowel (S) to Left & Right Side Panel (B & C). Attach Cam Lock (T) to Left & Right Side Panel (B & C). Attach Cam Bolt (U) to Left & Right Side Panel (B & C).

NOTE : - Make sure arrows on each Cam Lock points towards nearest edge with holes.

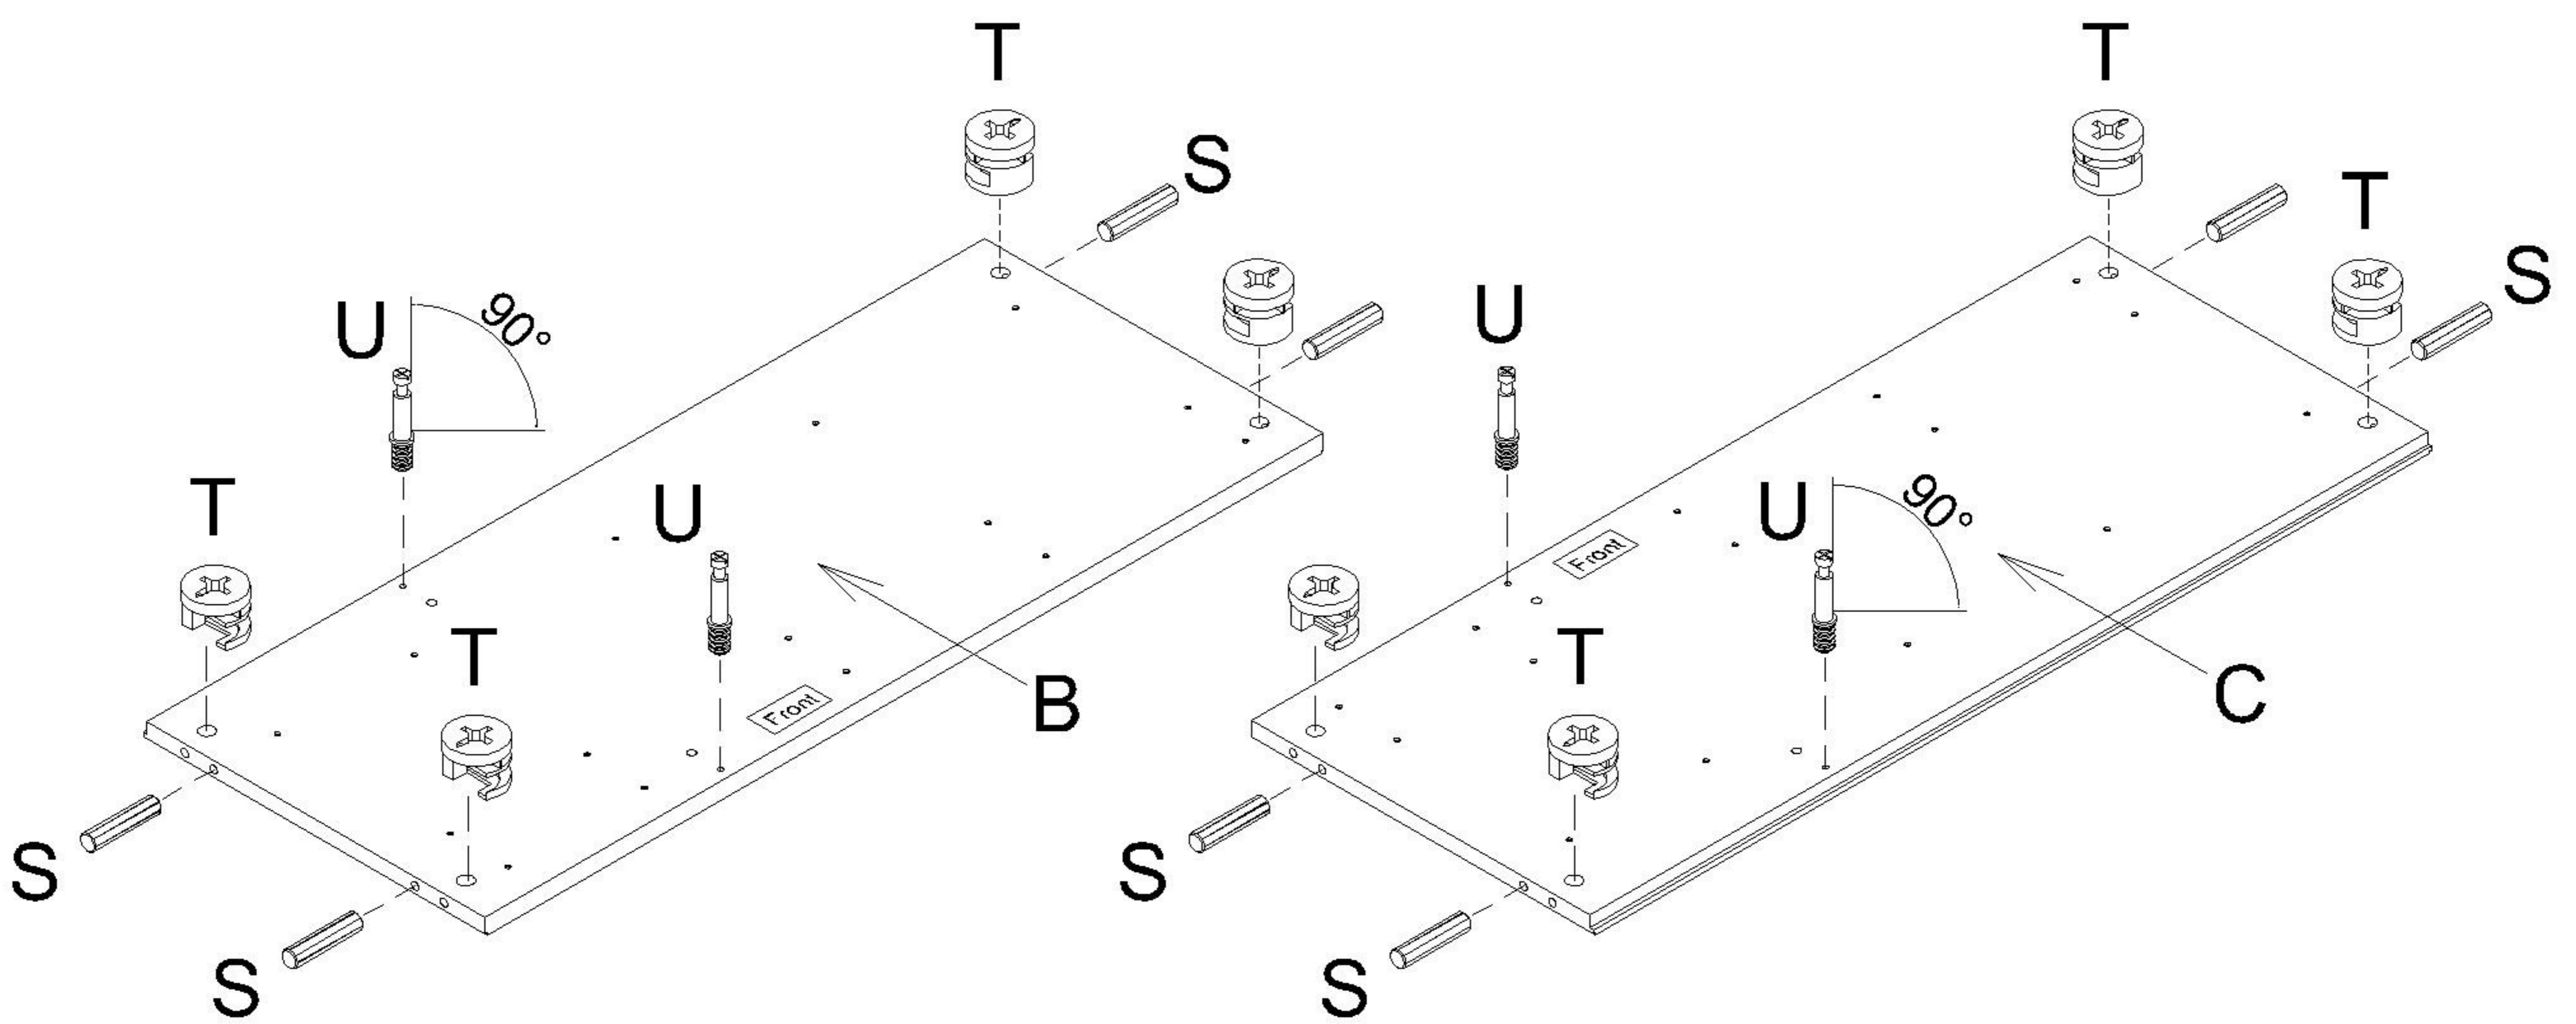


3

Attach Extension Runner (R) to Left & Right Side Panel (B & C) using Screw (Q) to secure.

NOTE : - Runner roller should be towards the front of the panel.


- Screw (T) should be assembled from the front of the runner. Start from Q<sup>1</sup>, Q<sup>2</sup> then Q<sup>3</sup>.
- Make sure the screws are installed vertically without slant to ensure screw sits properly in the hole.

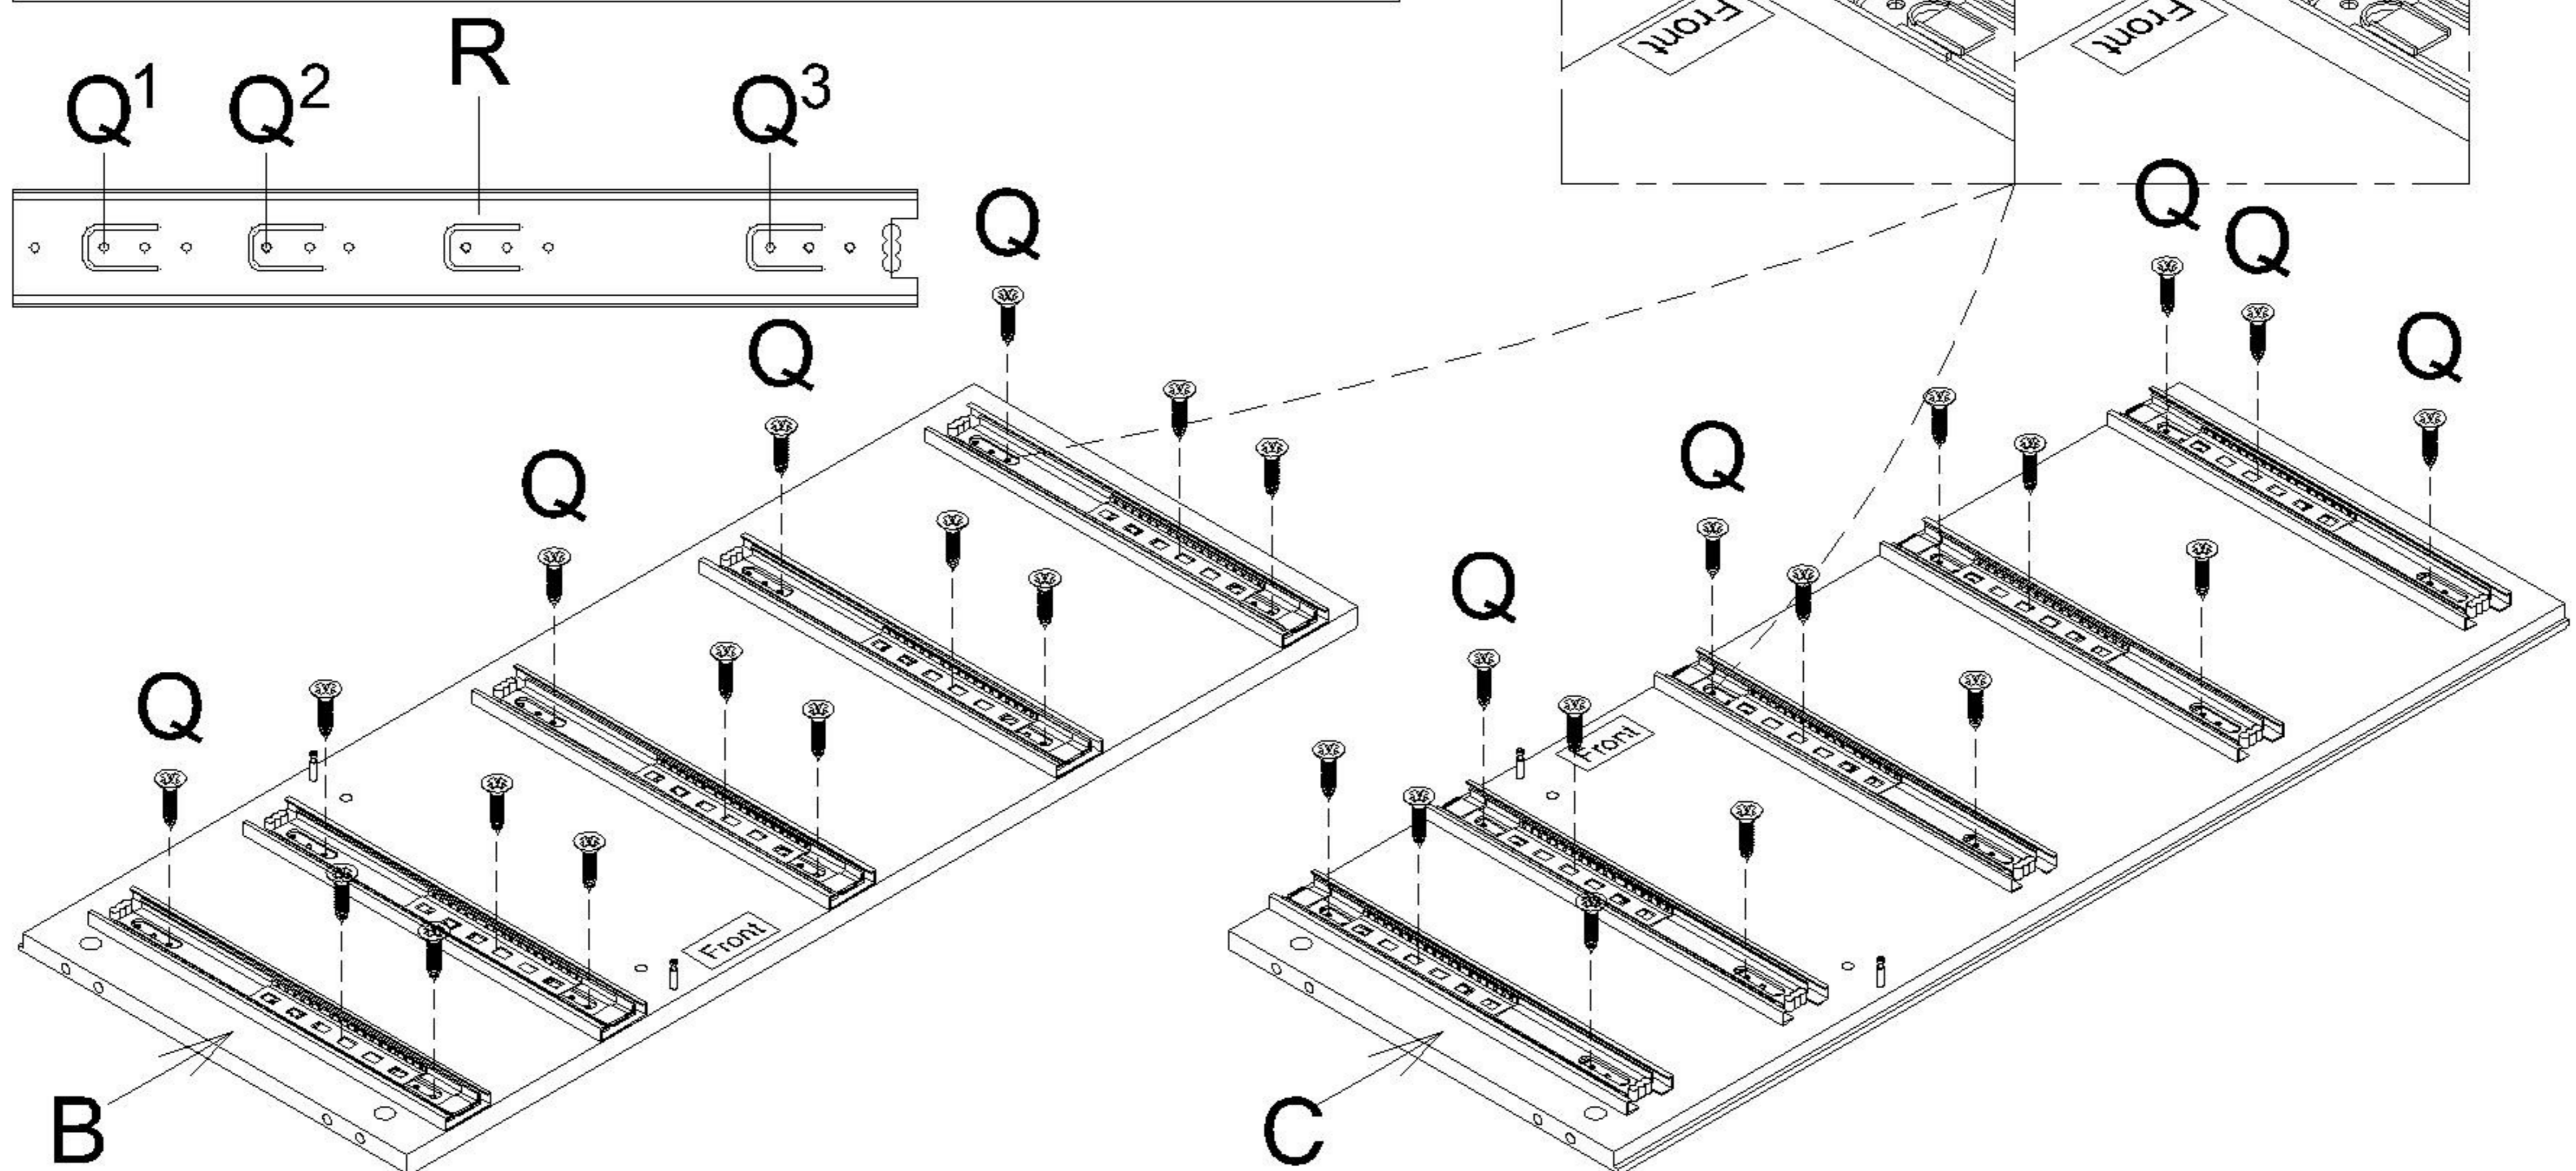

4


Insert Dowel (S) to Center Bar (E). Attach Cam Lock (T) to Center Bar (E).

NOTE : - Make sure arrows on each Cam Lock points towards nearest edge with holes.

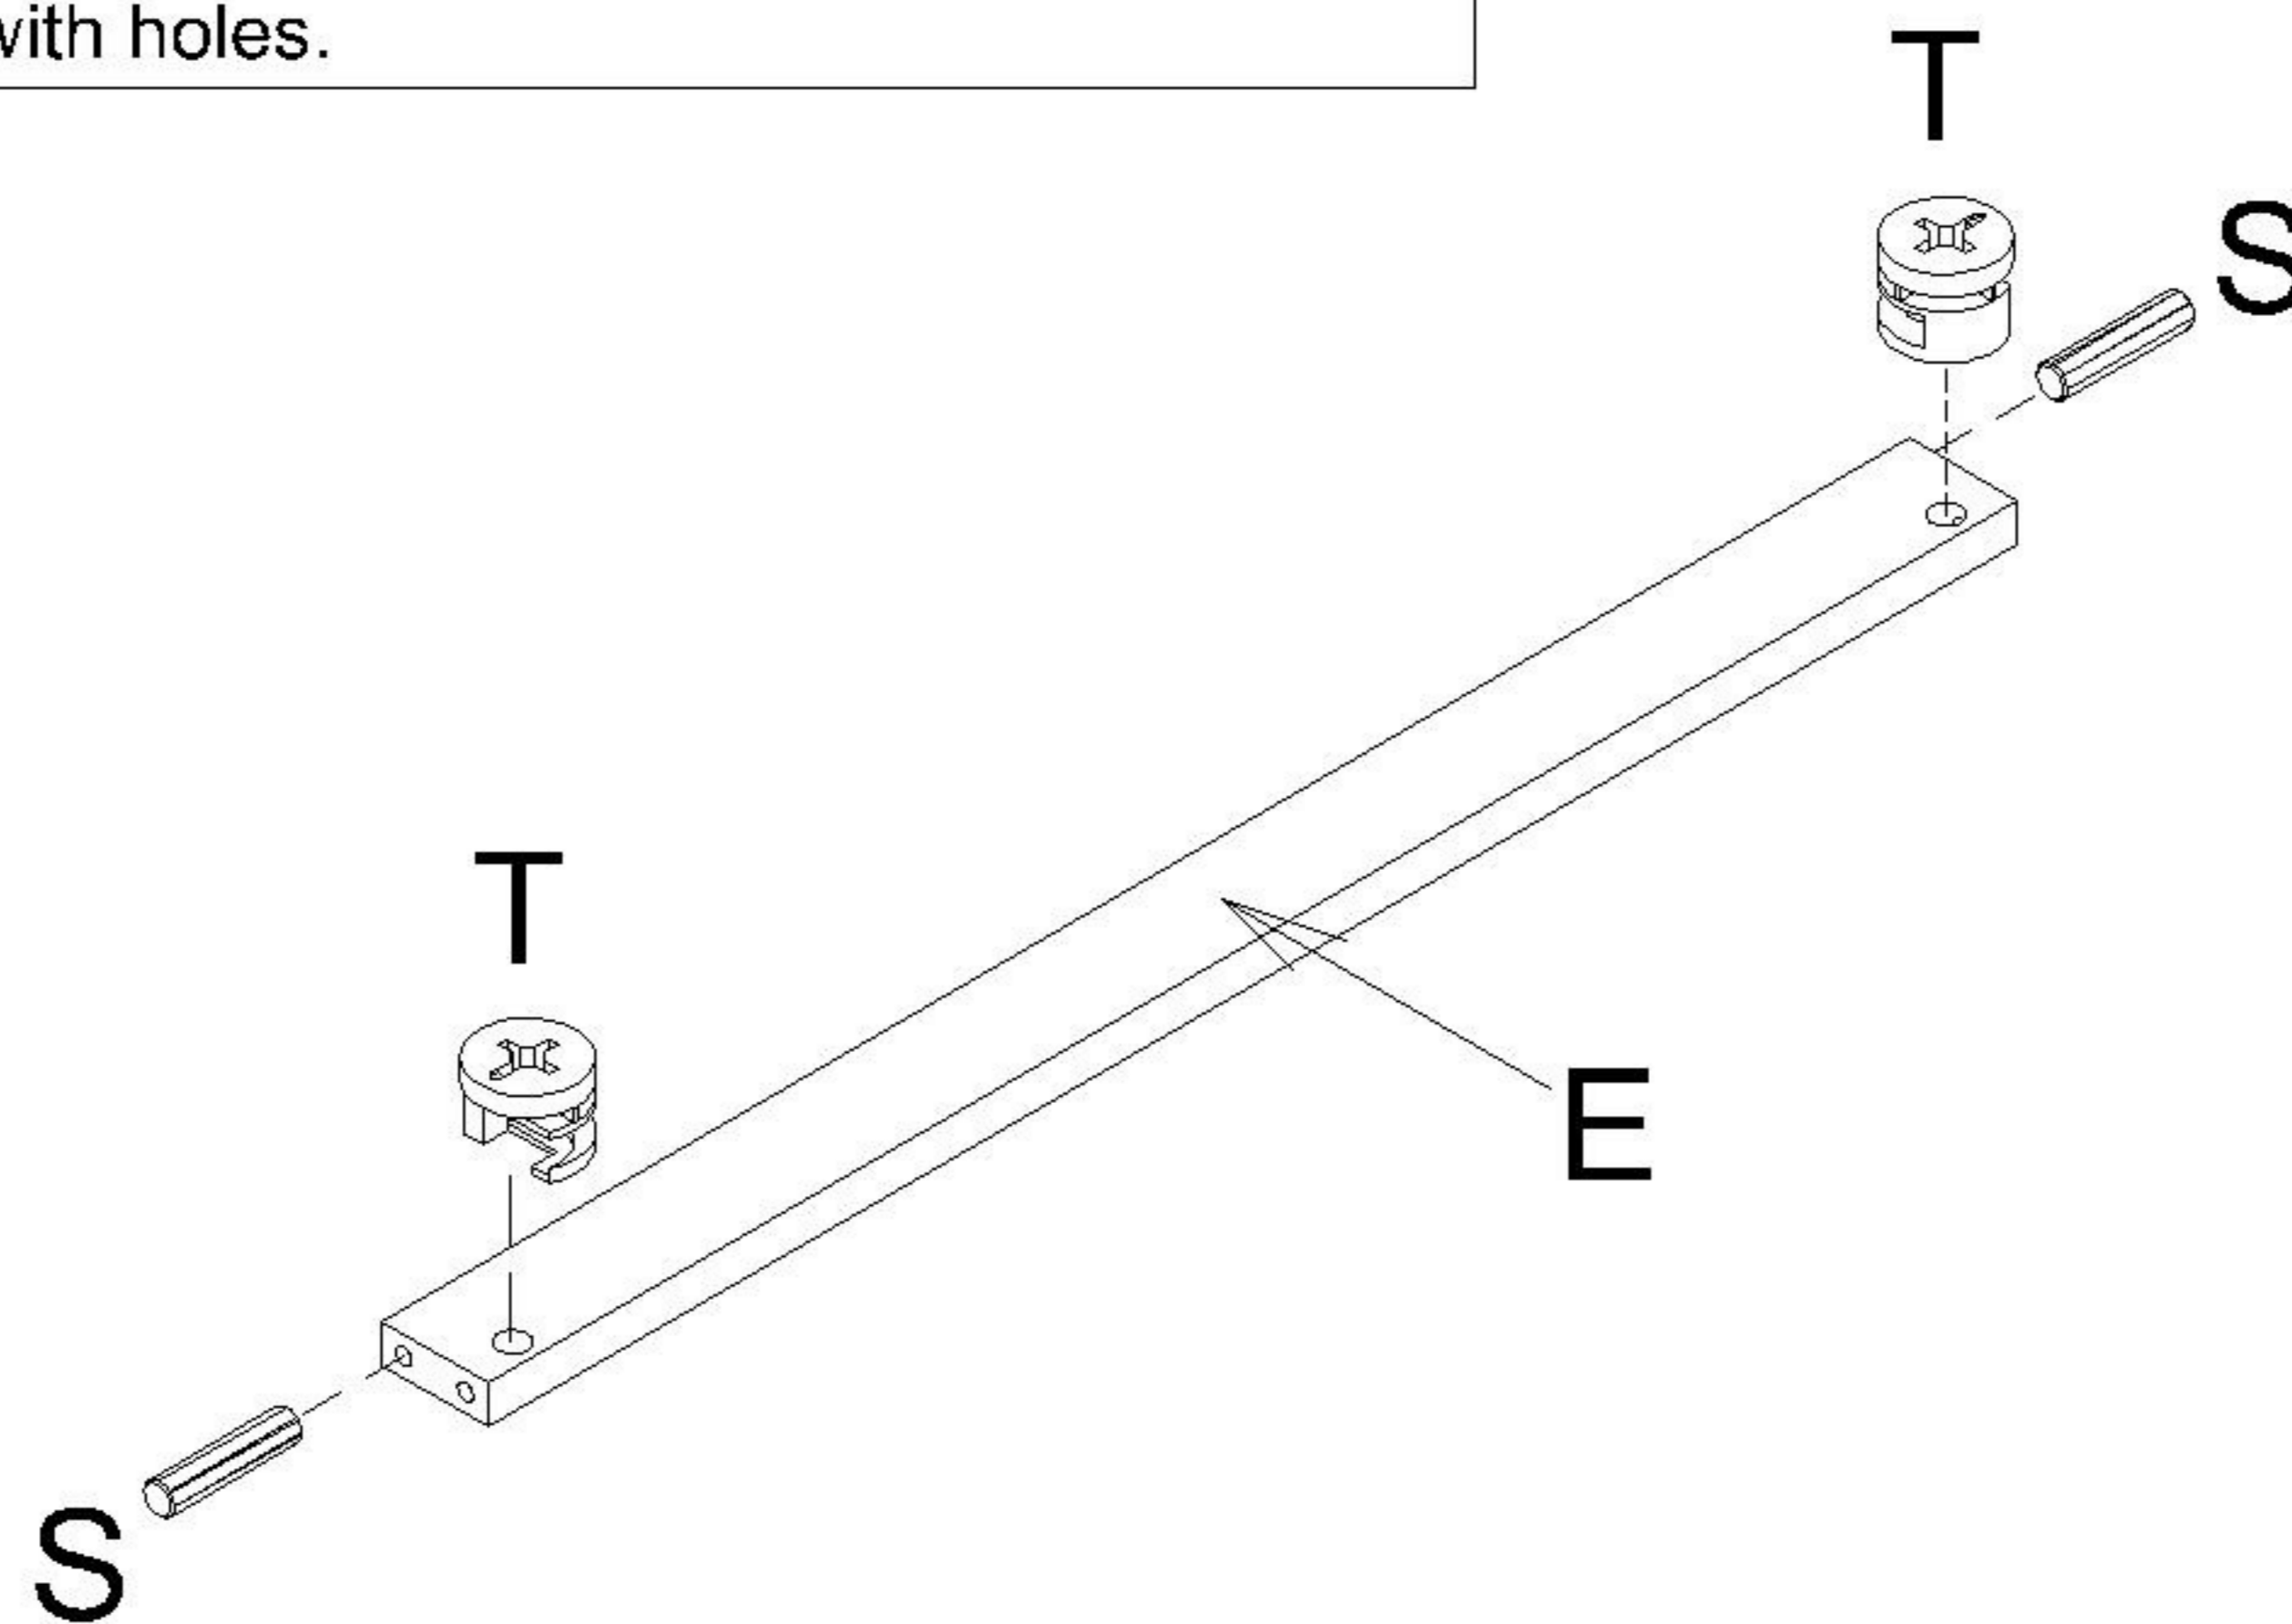


5

Attach Post (G) to Bottom Frame (D) and secure with Flat Washer (Y), Spring Washer (Z) and JCBC Bolt (AA), and tighten with Allen Key (AB) clockwise.

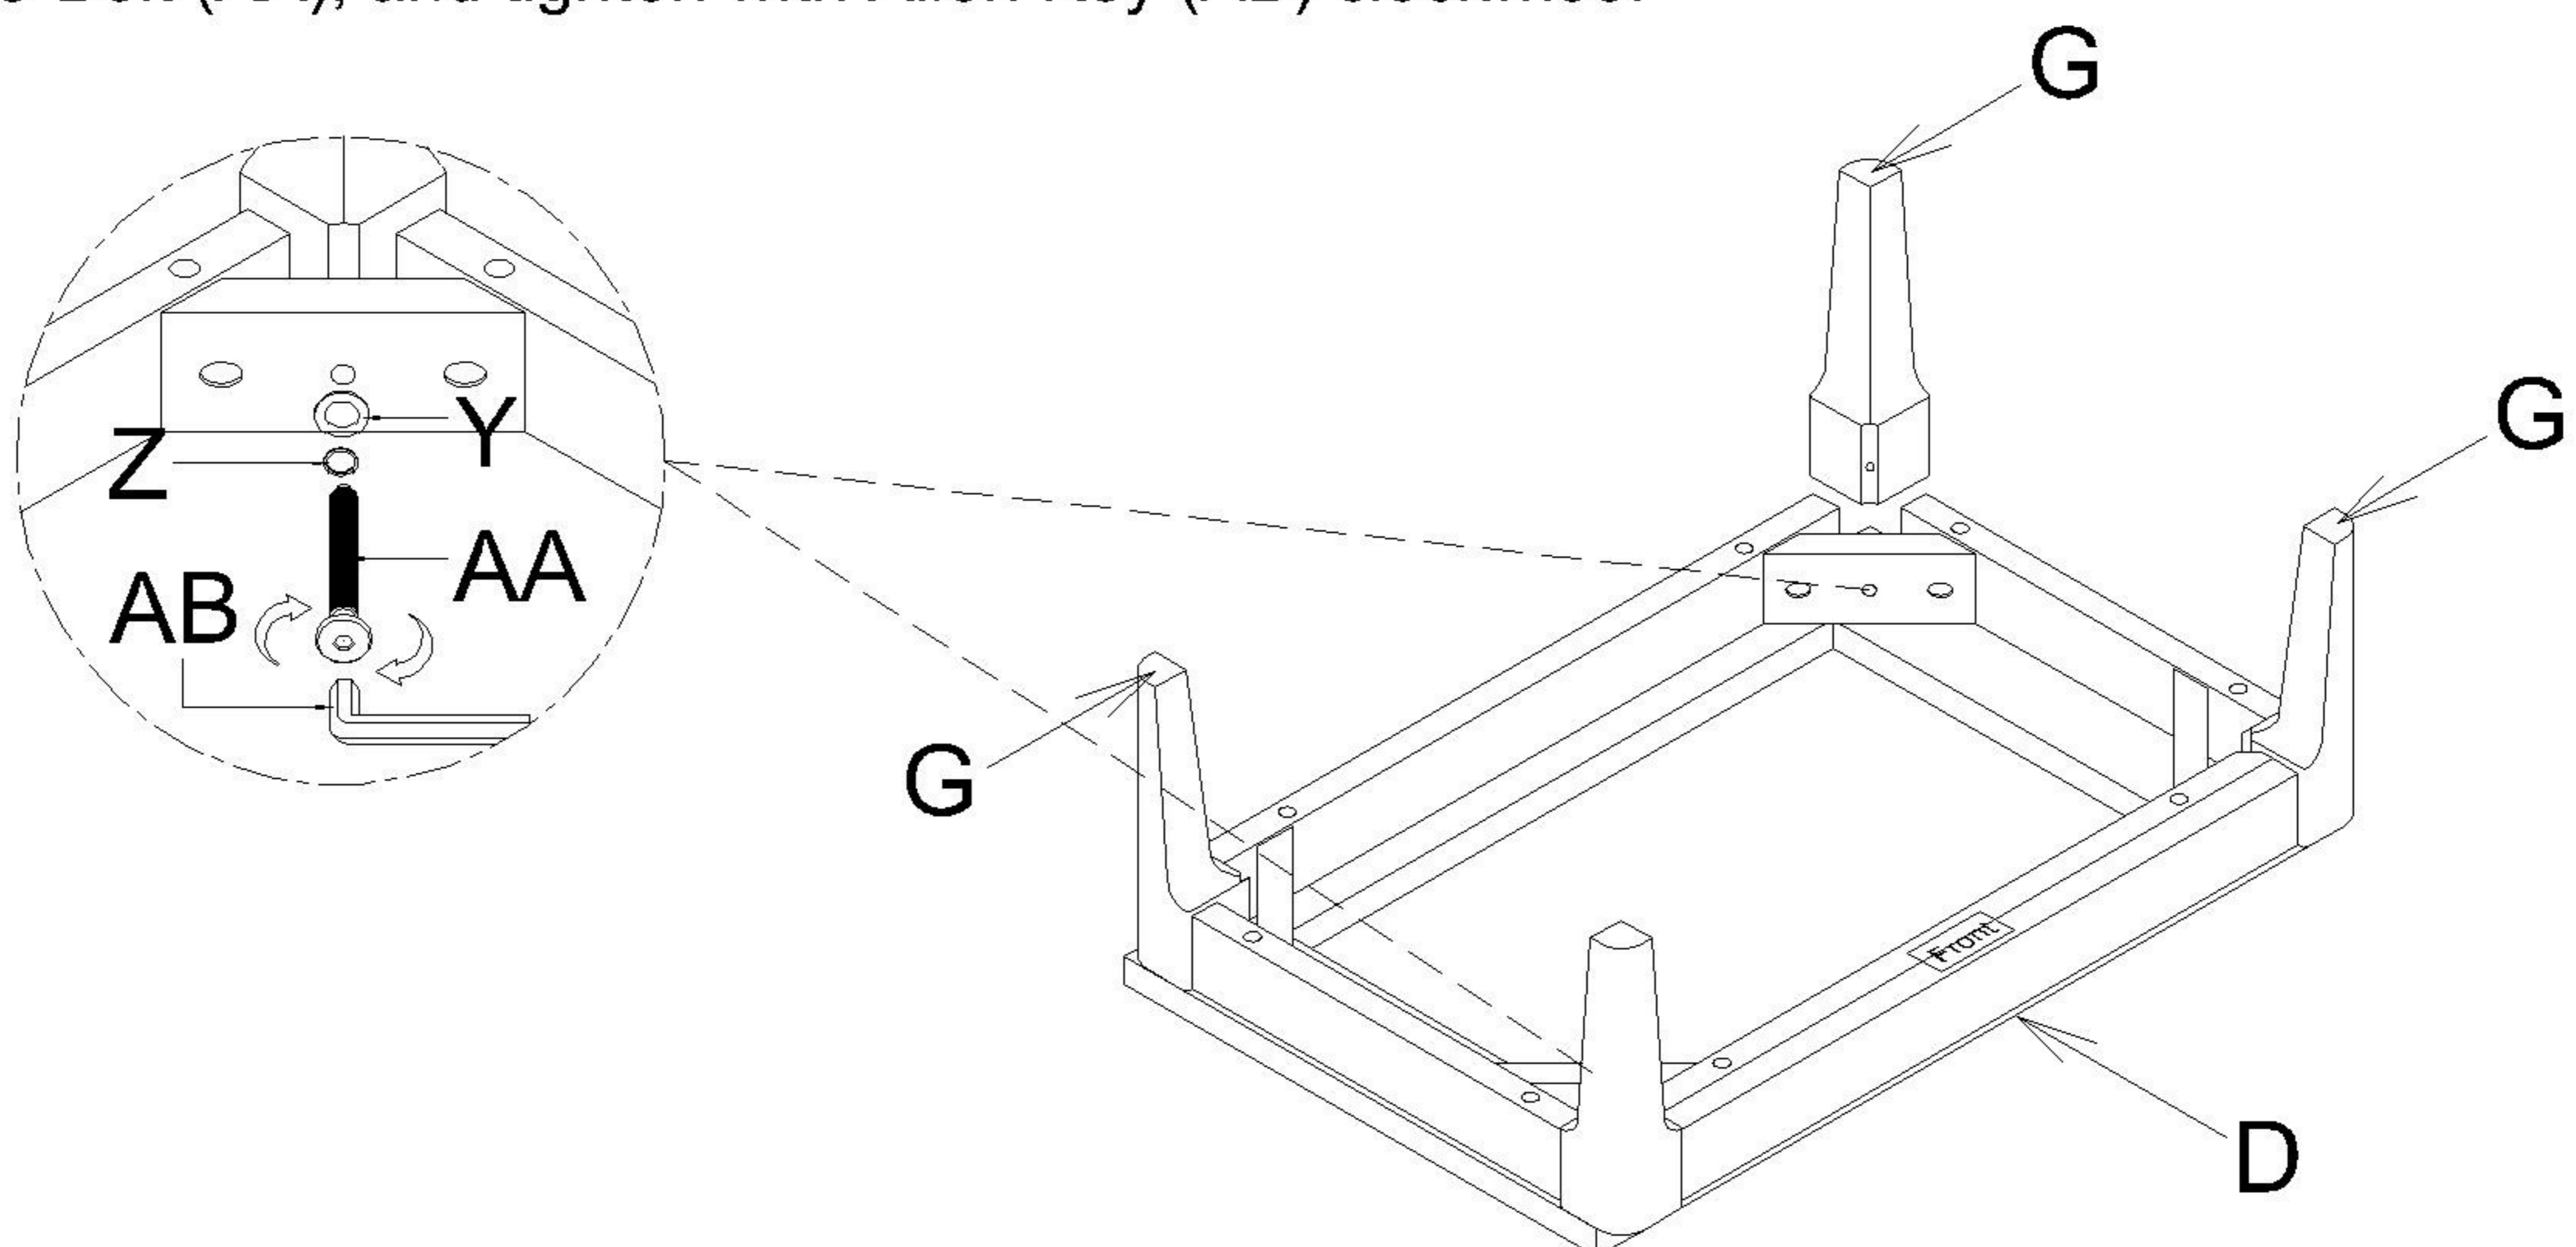


**6**

Insert and secure Cam Bolt (U) to Bottom Frame (D).

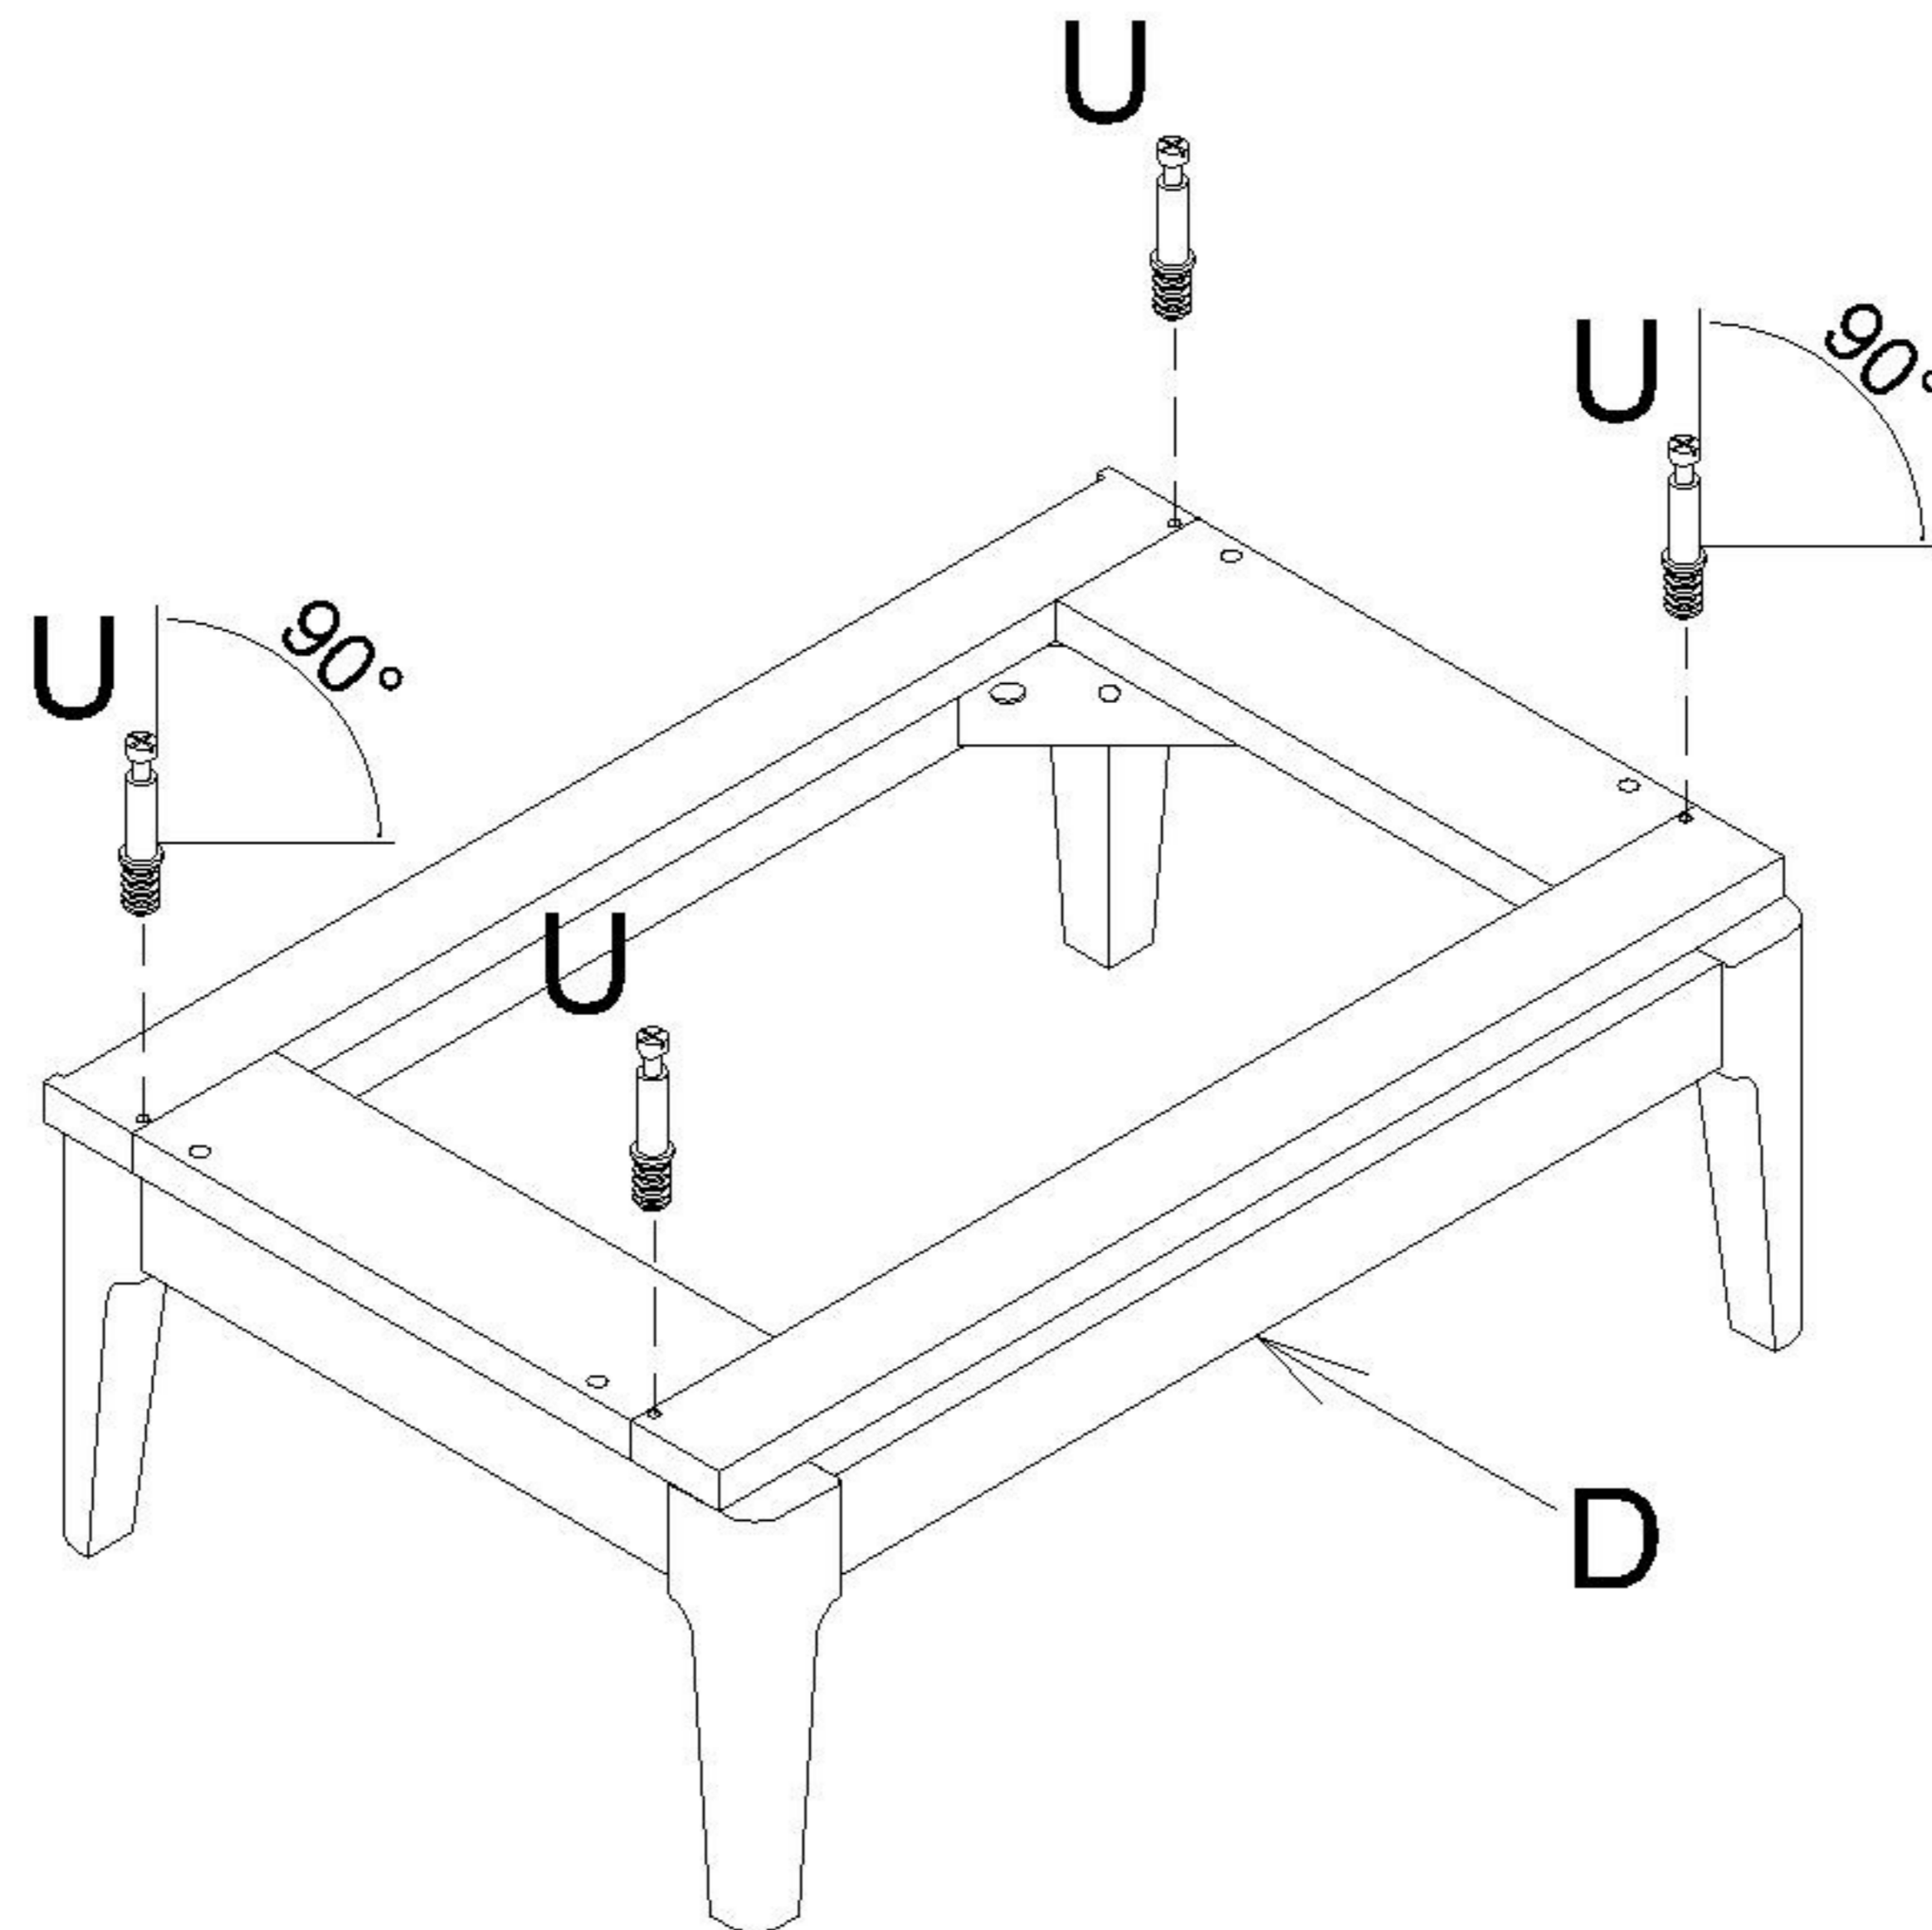
**7**

Attach Left & Right Side Panel (B & C) to Center Bar (E) and secure with Cam Lock (T). Cover Cam Lock (T) with Cam Lock Cover (W).

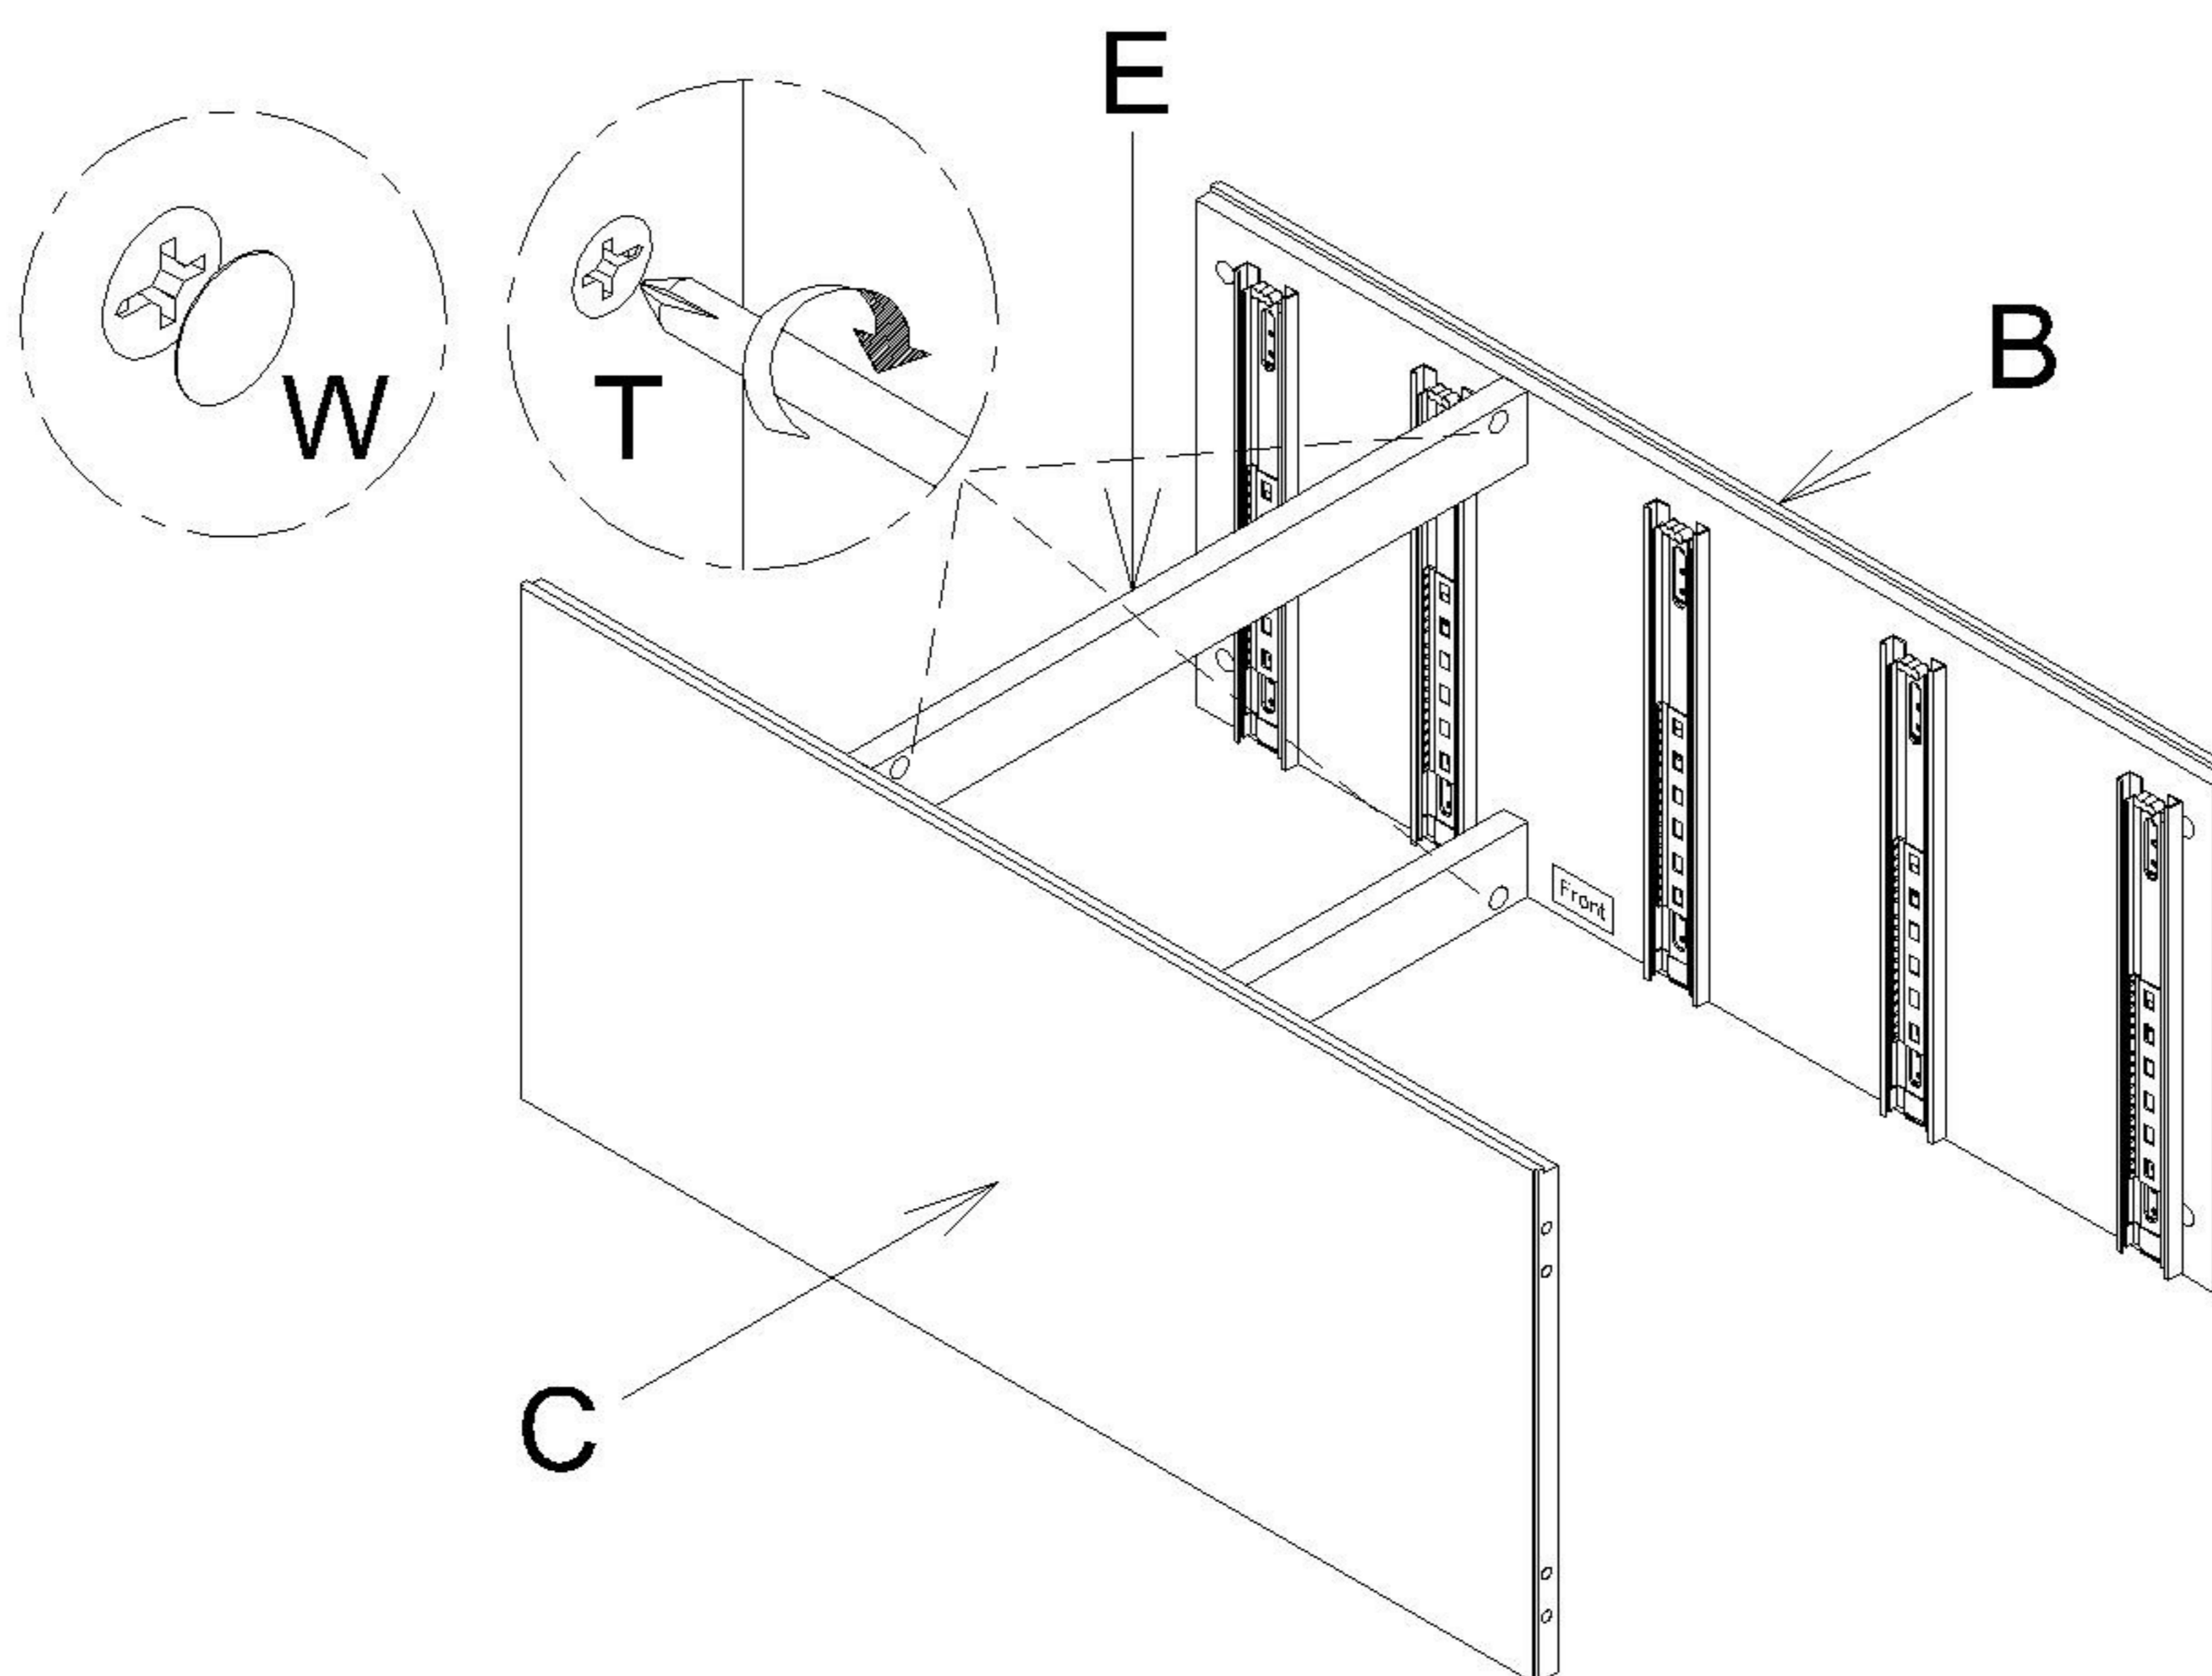


**8**

Attach Bottom Frame (D) to Side Panel Left & Right (B & C) and secure with Cam Lock (T).  
Cover Cam Lock (T) with Cam Lock Cover (W).

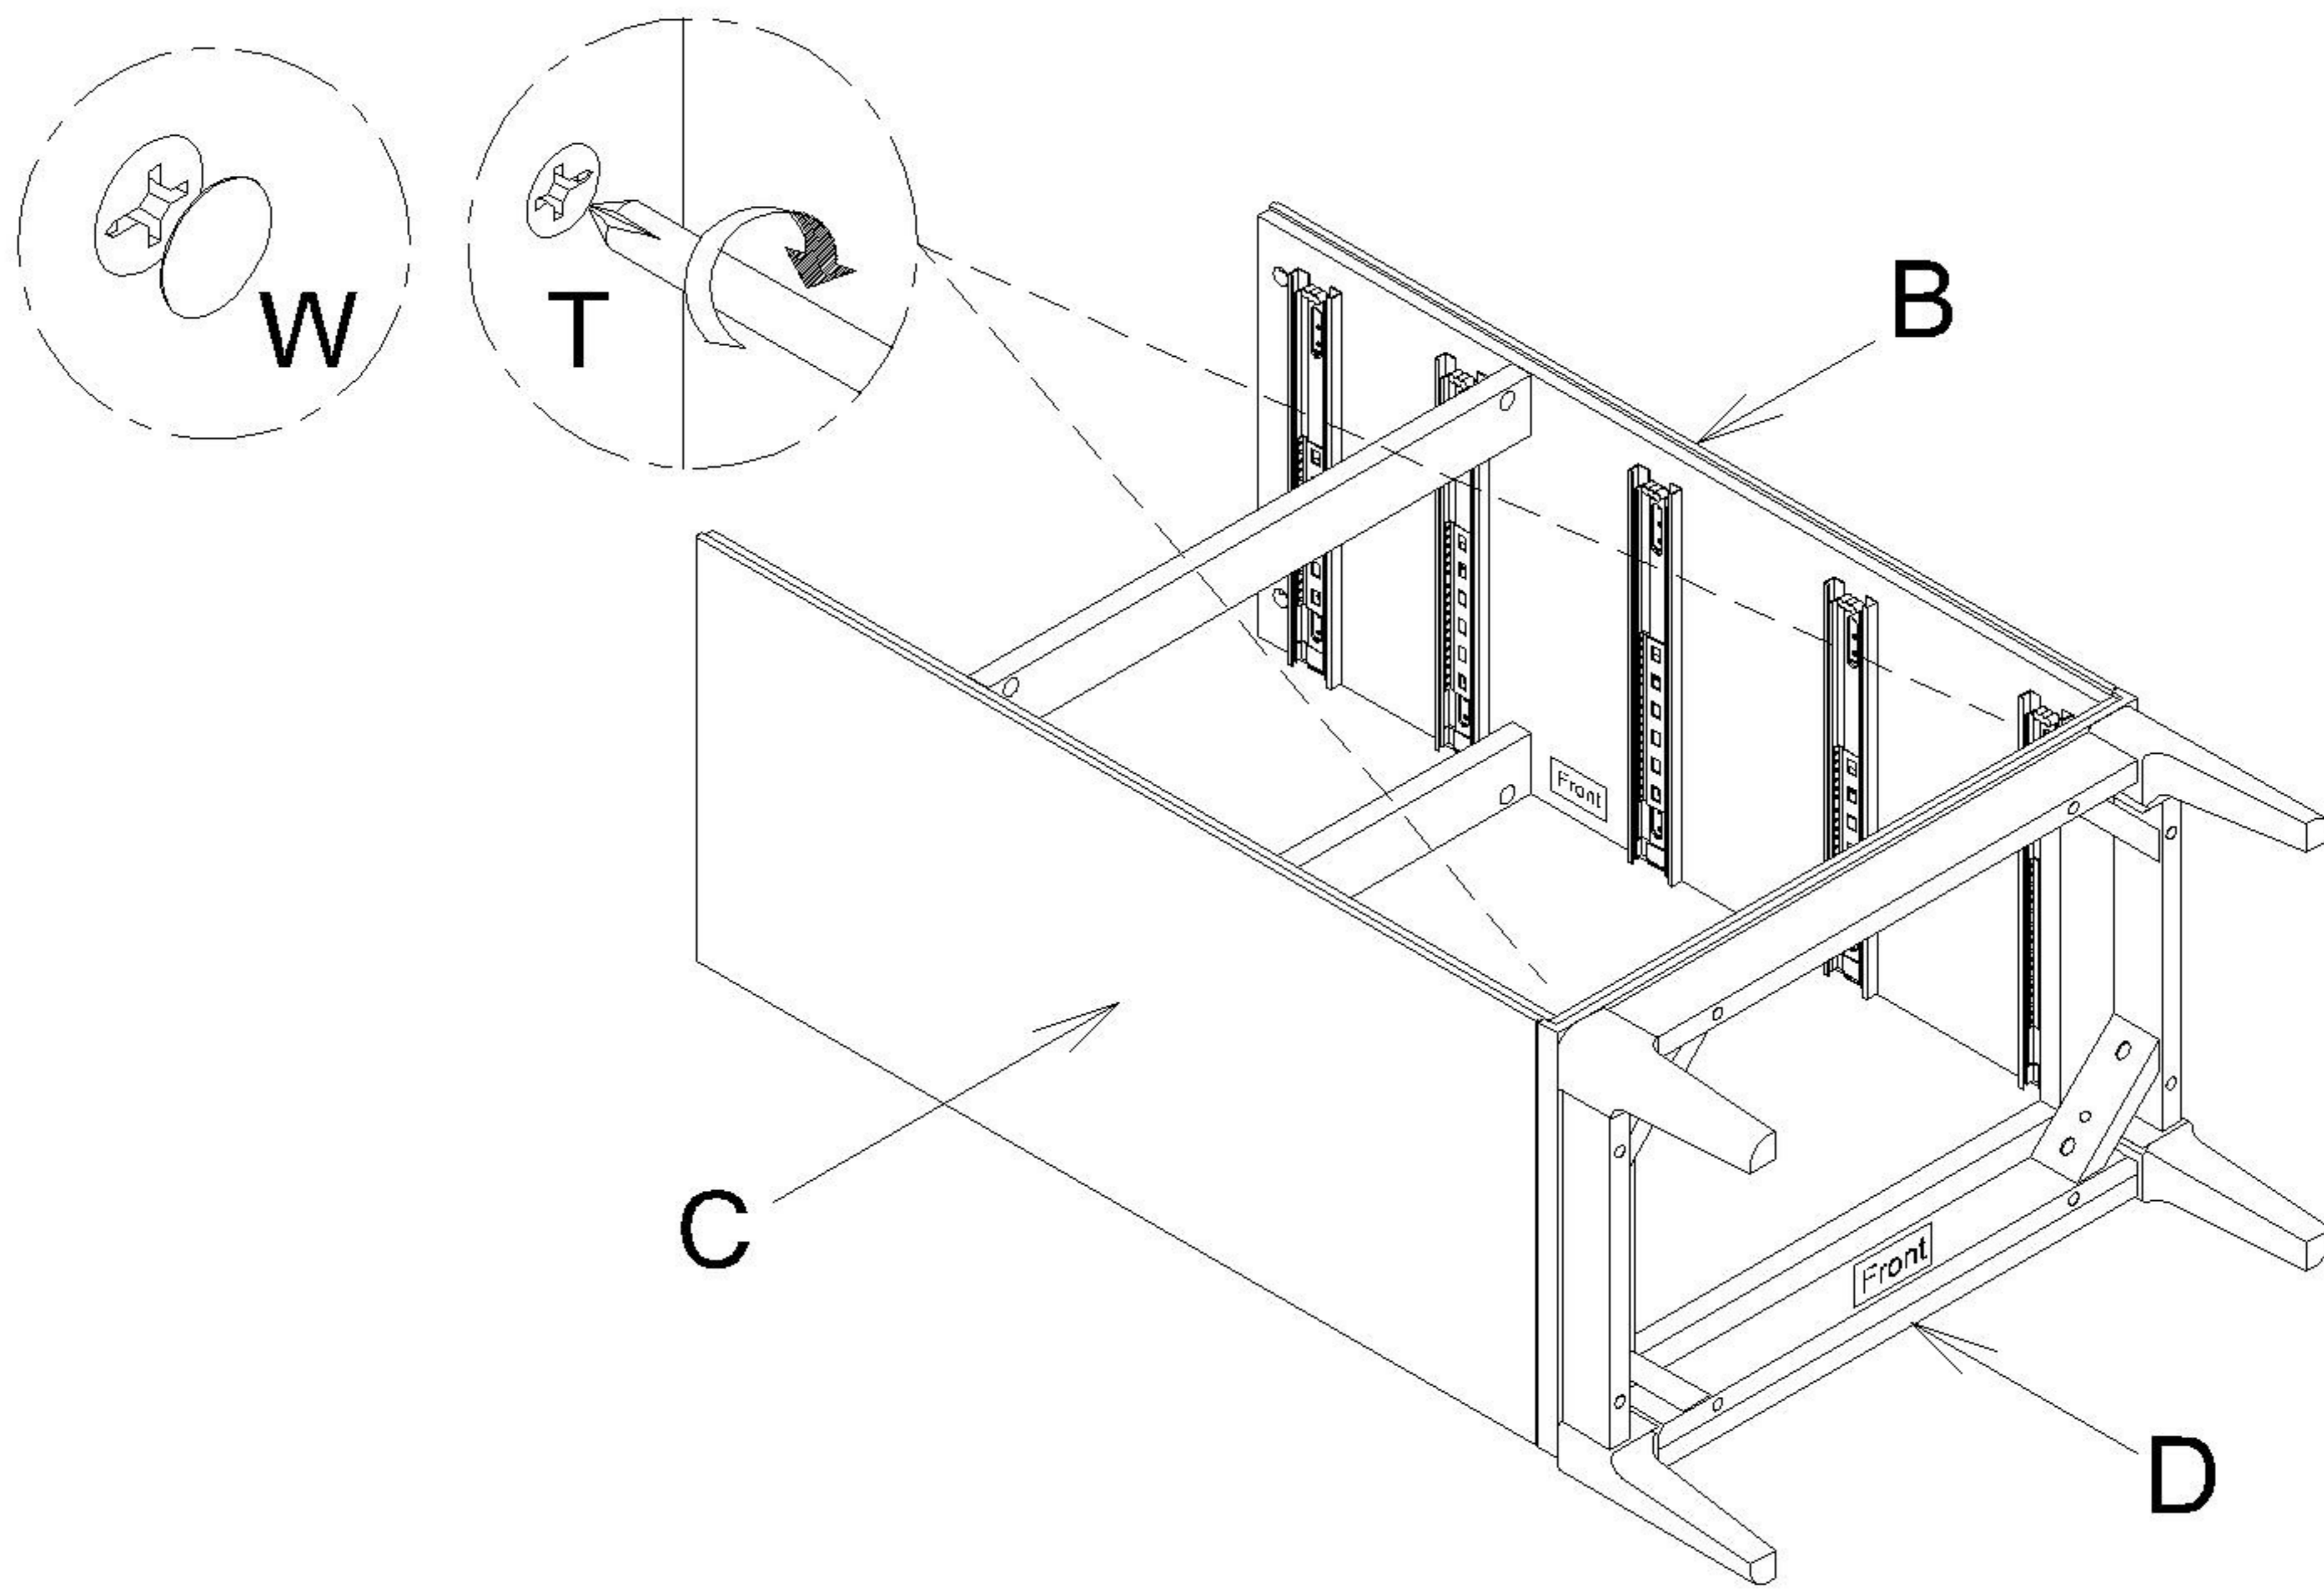
**9**

Attach Top Panel (A) to Side Panel Left & Right (B & C) and secure with Cam Lock (T).  
Cover Cam Lock (T) with Cam Lock Cover (W).

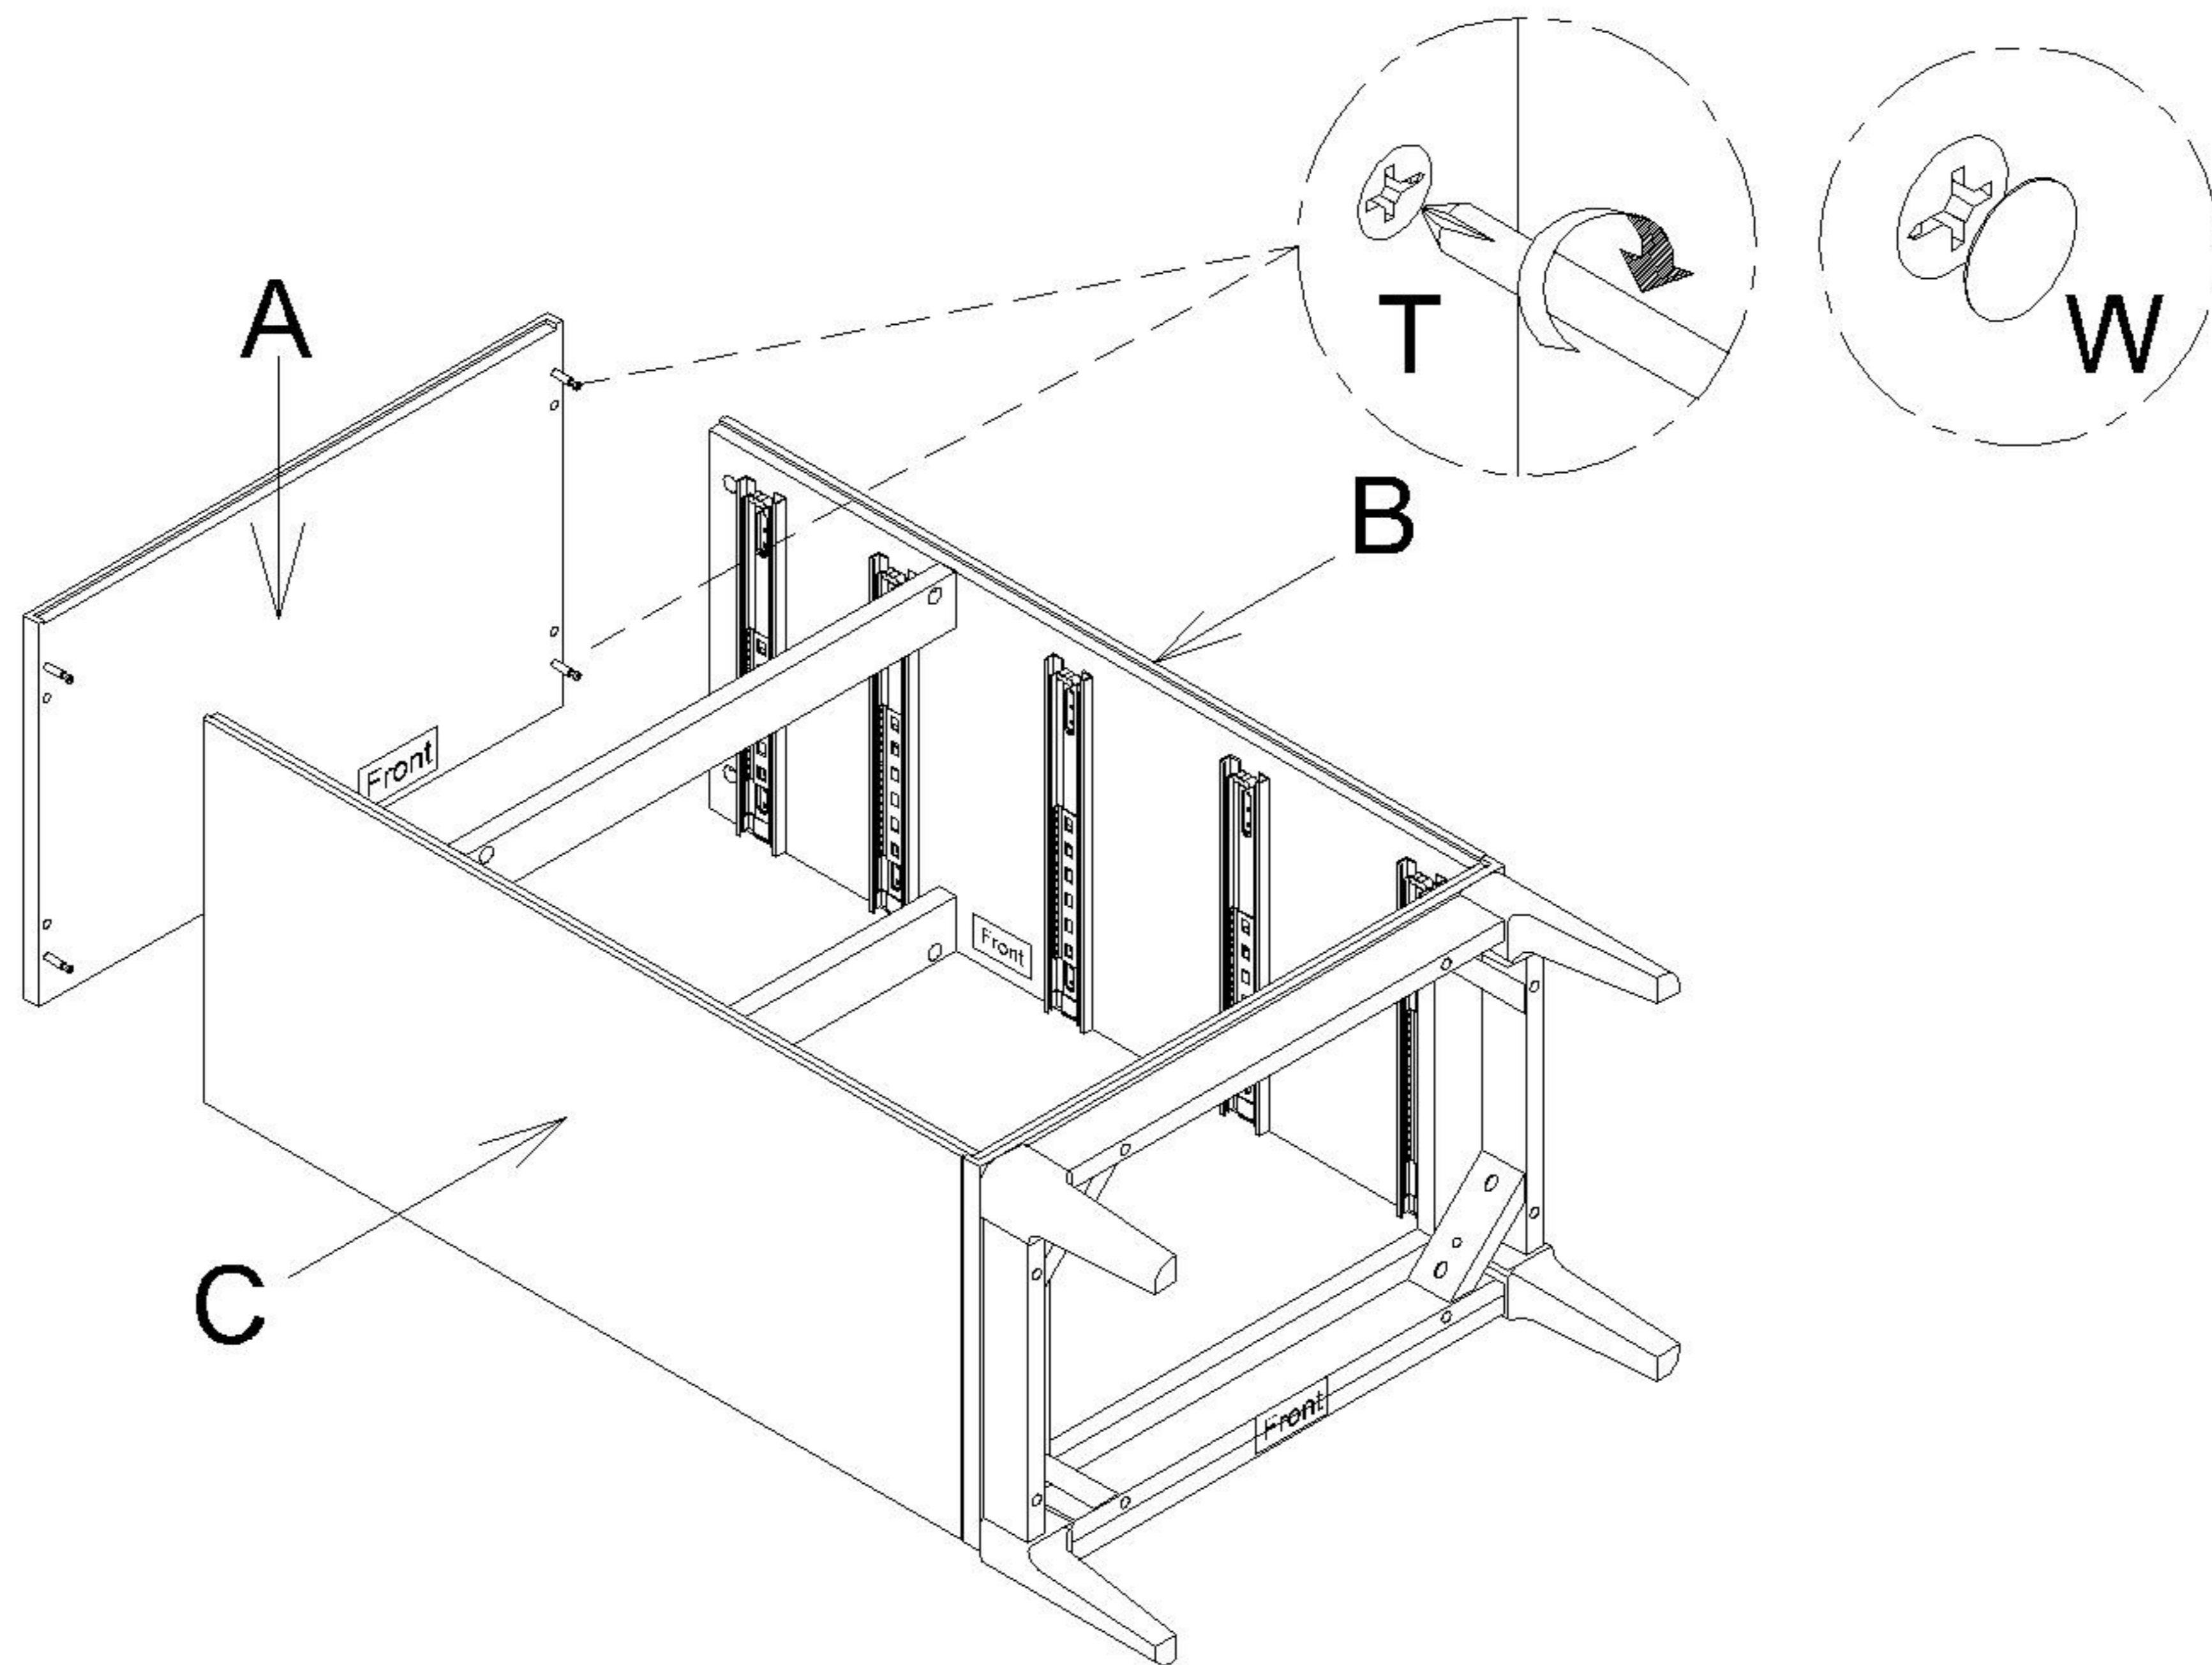


10

Attach Back Plywood (F) to assembled unit using Panhead Screw (X) to secure.

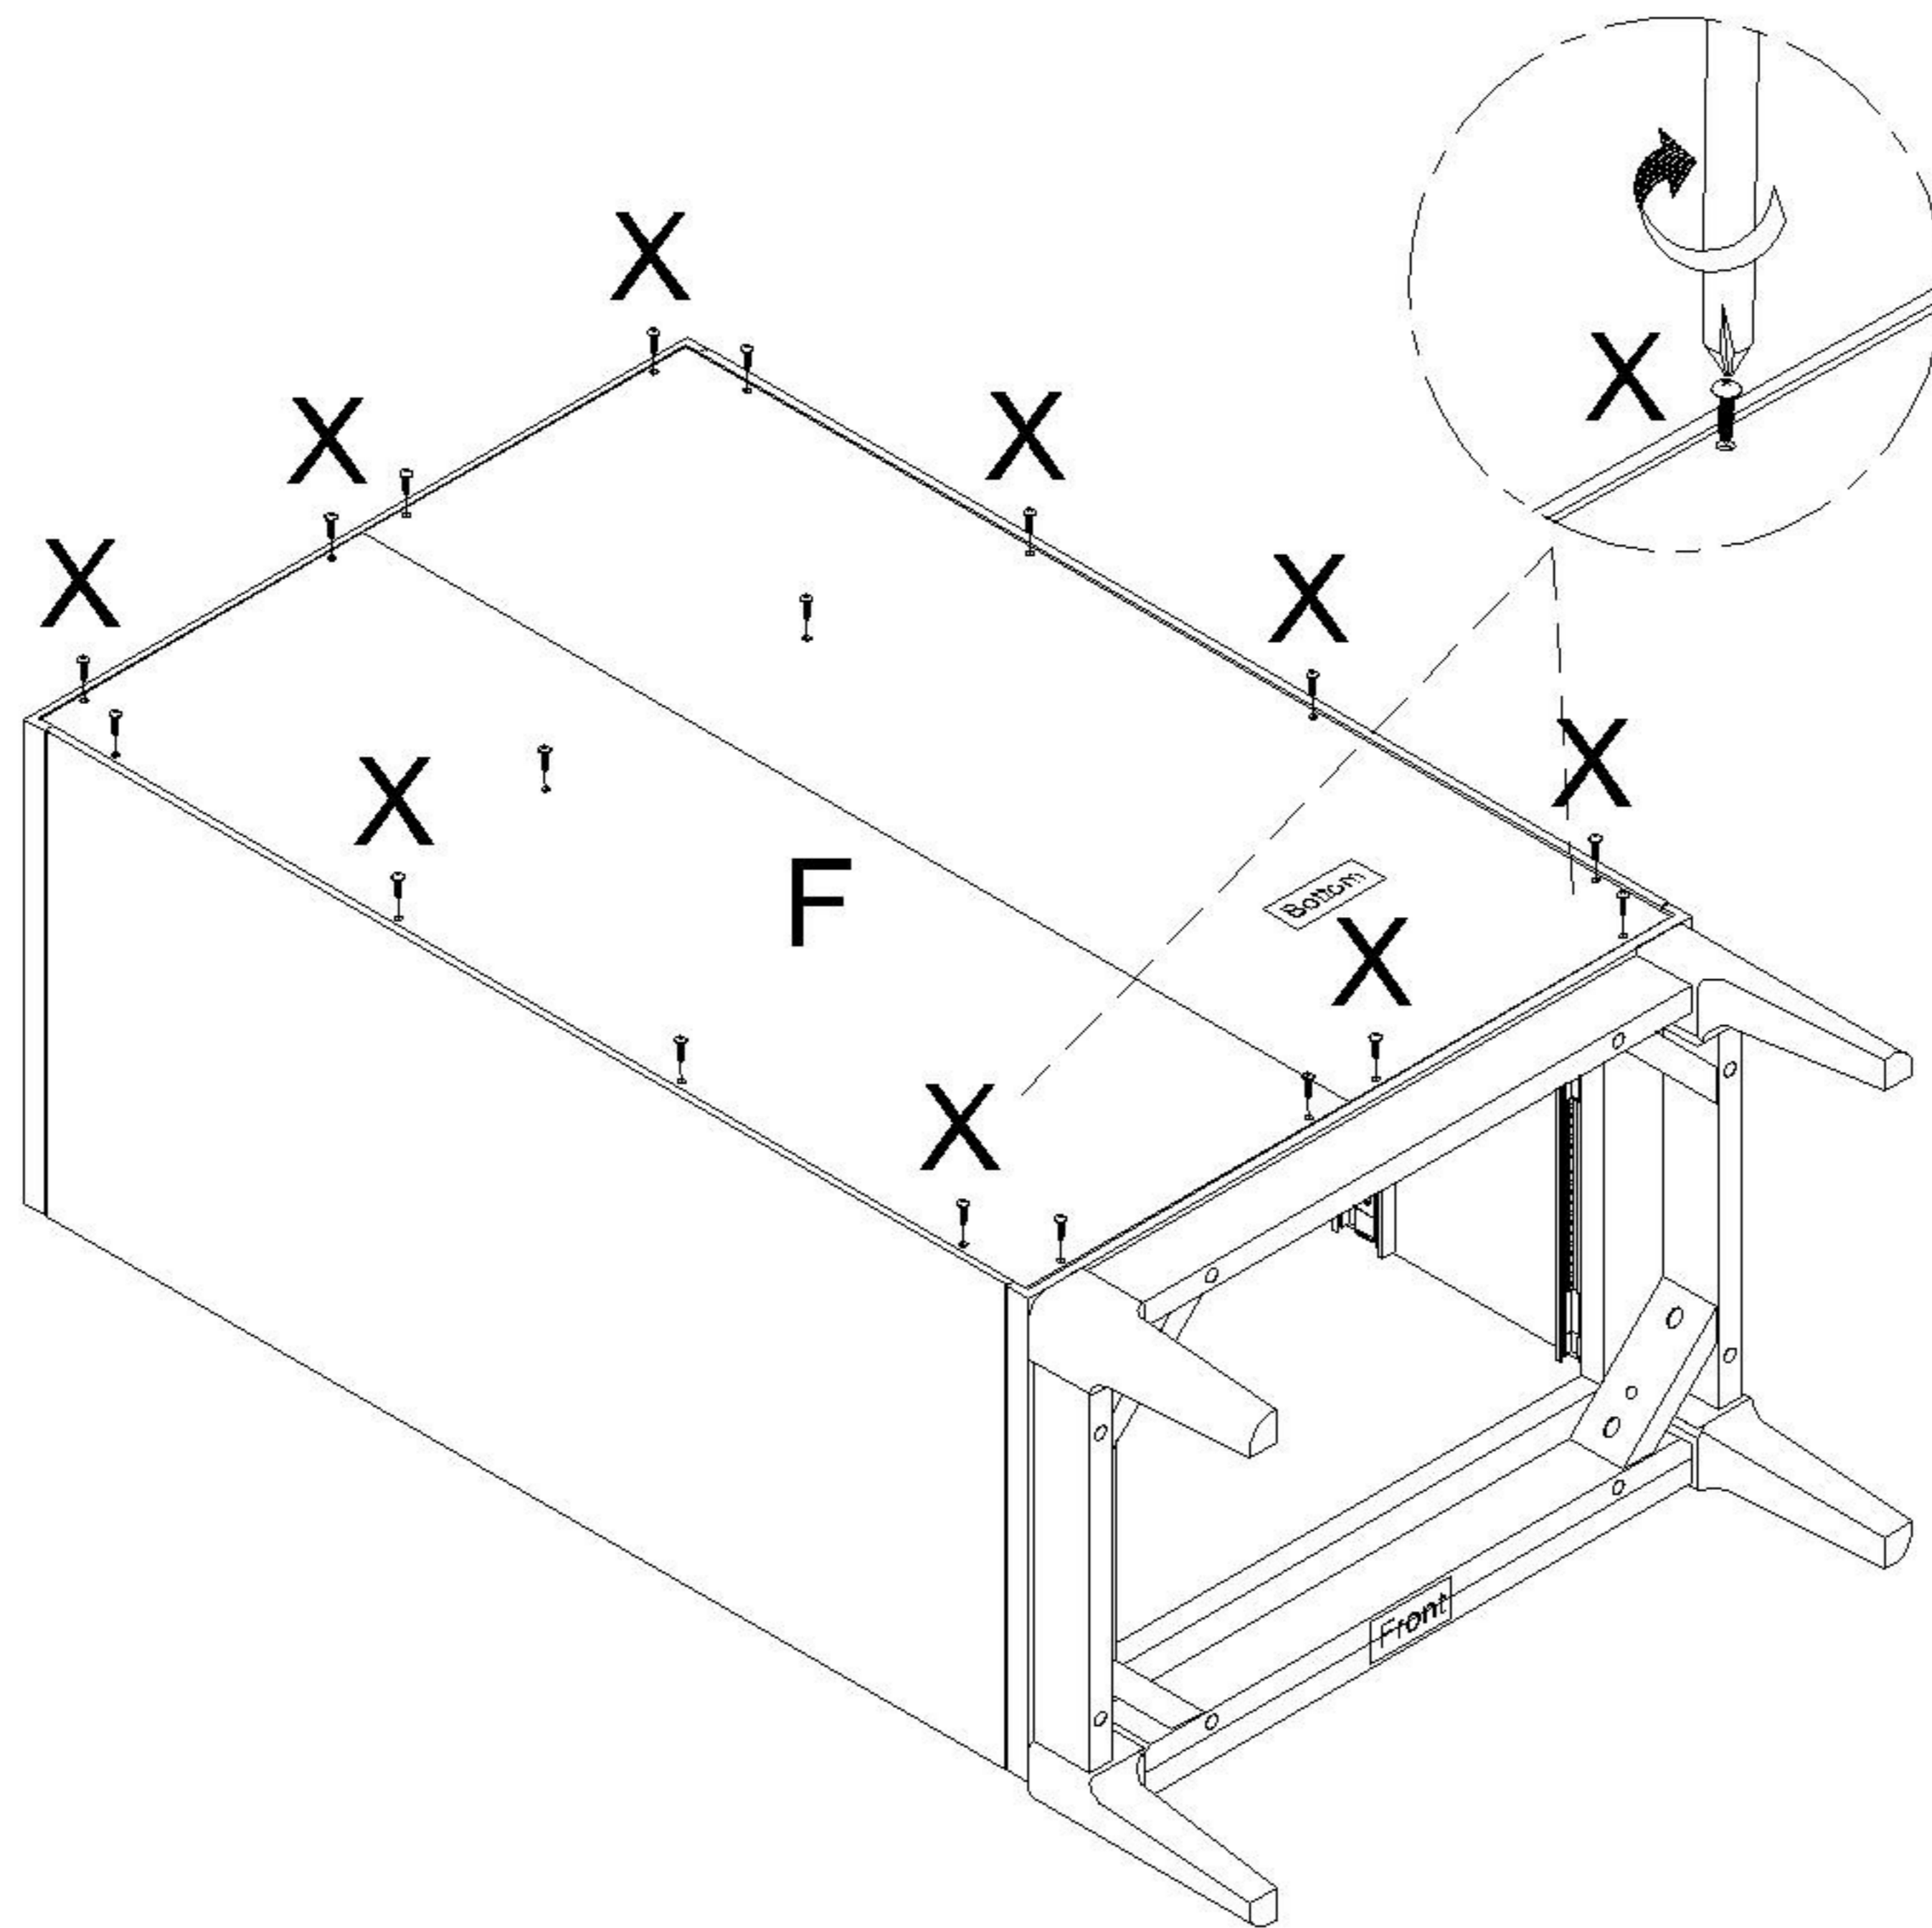


11

Attach Extension Runner (R) to Left & Right Small Drawer Side (I & J) using Screw (Q) to secure.

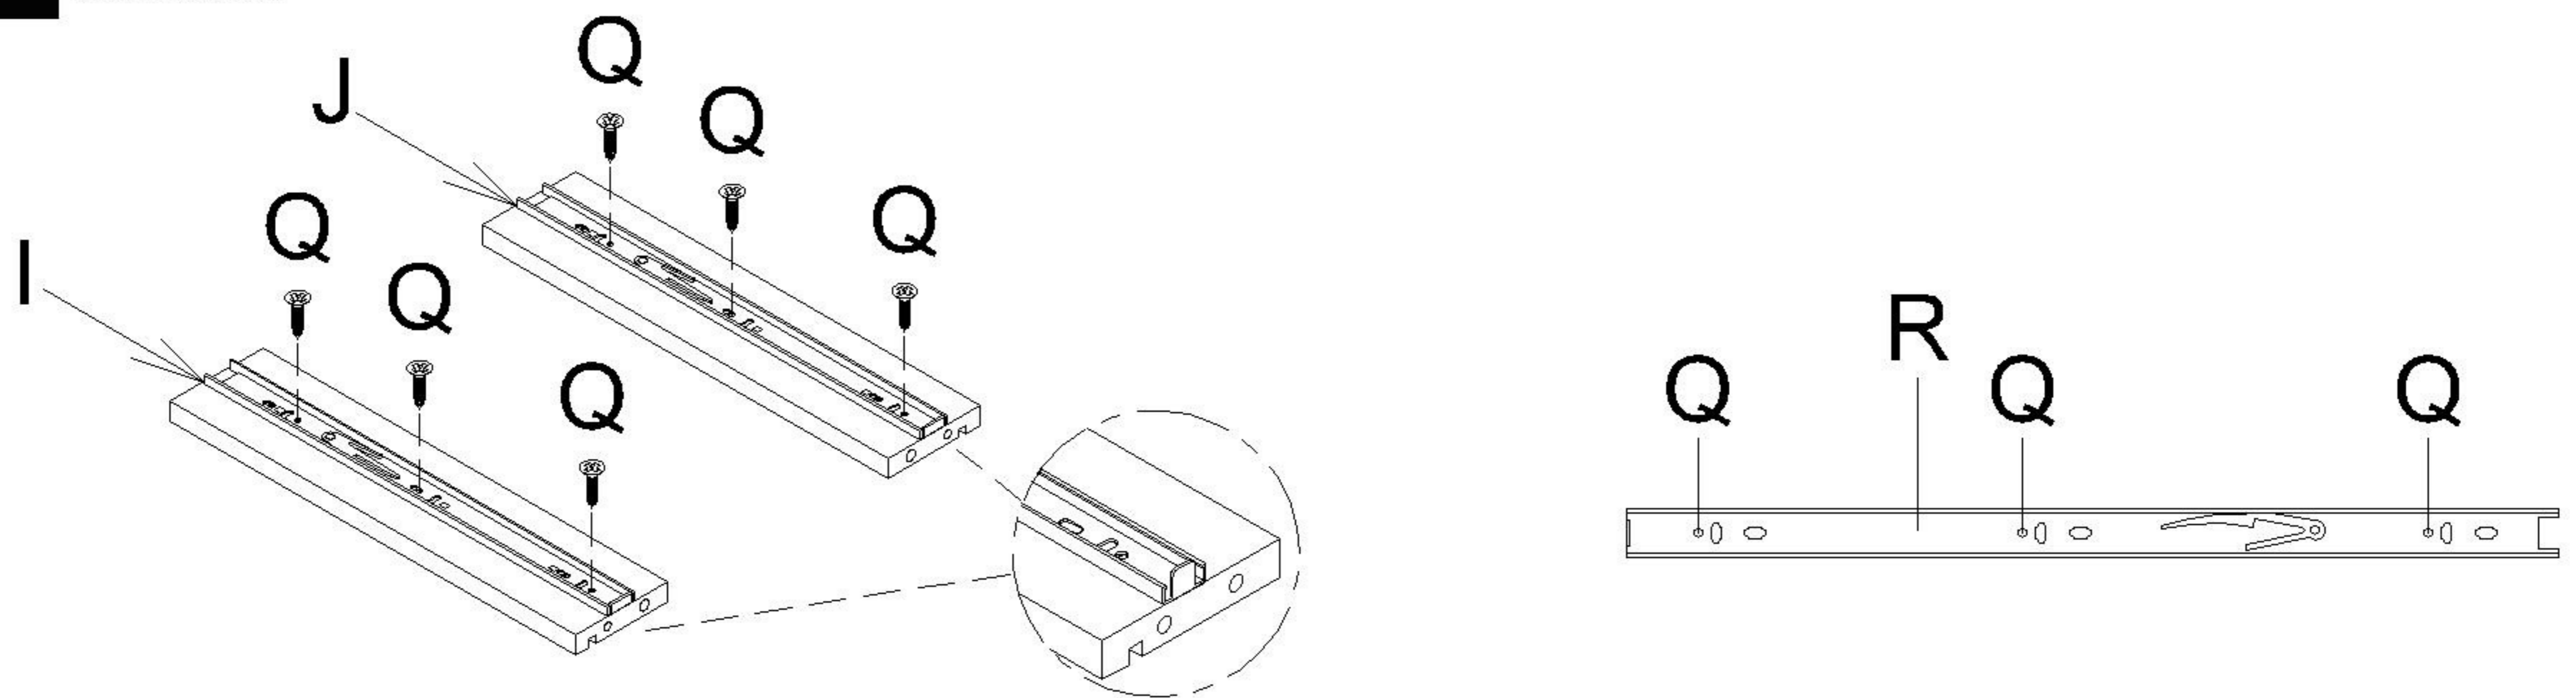


12


Flip over Small Left & Right Drawer Side (I & J). Insert Dowel (V) to Left & Right Small Drawer Slide (I & J) & Small Drawer Back (K). Attach Cam Lock (T) to Left & Right Small Drawer Side (I & J) & Small Drawer Back (K). Attach Cam Bolt (U) to Left & Right Small Drawer Side (I & J) & Small Drawer Front (H).

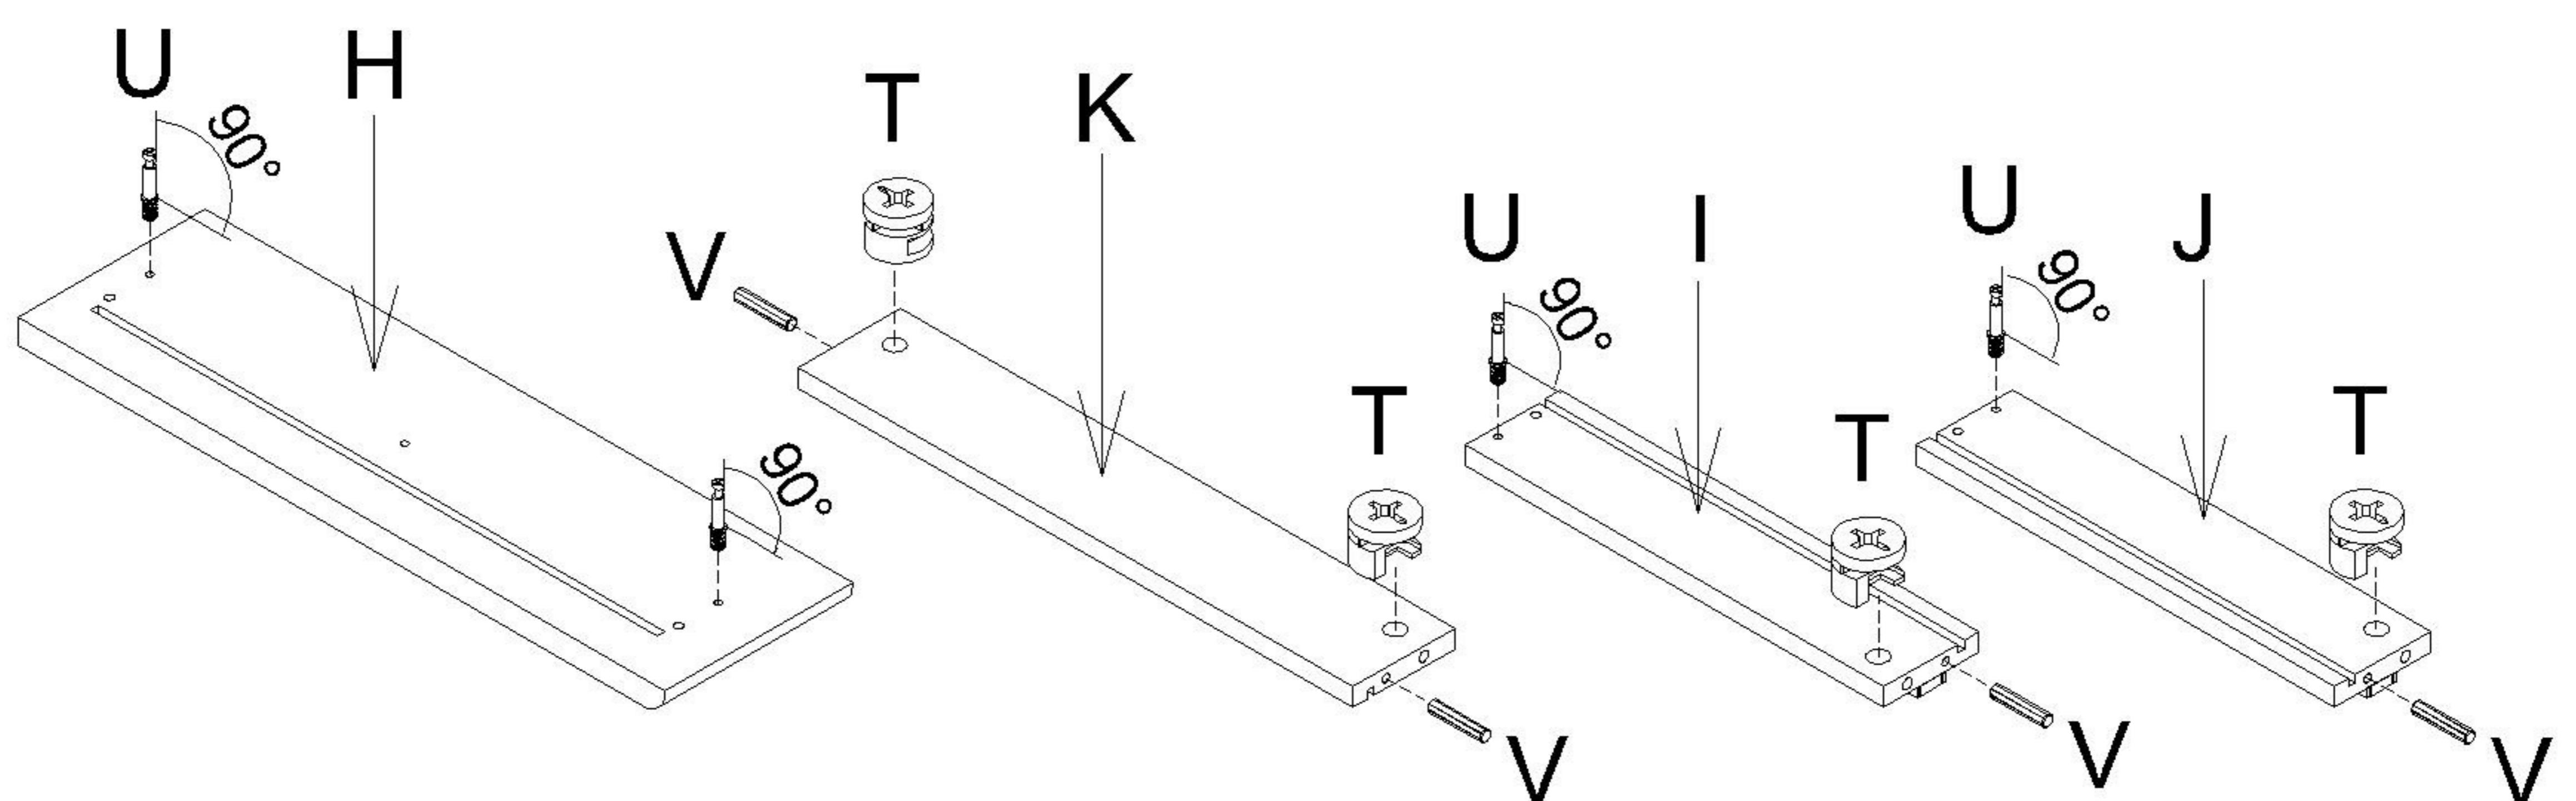


**13** Attach Left & Right Small Drawer Side (I & J) to Small Drawer Back (K) and secure with Cam Lock (T). Use Cam Lock Cover (W) to cover Cam Lock (T).

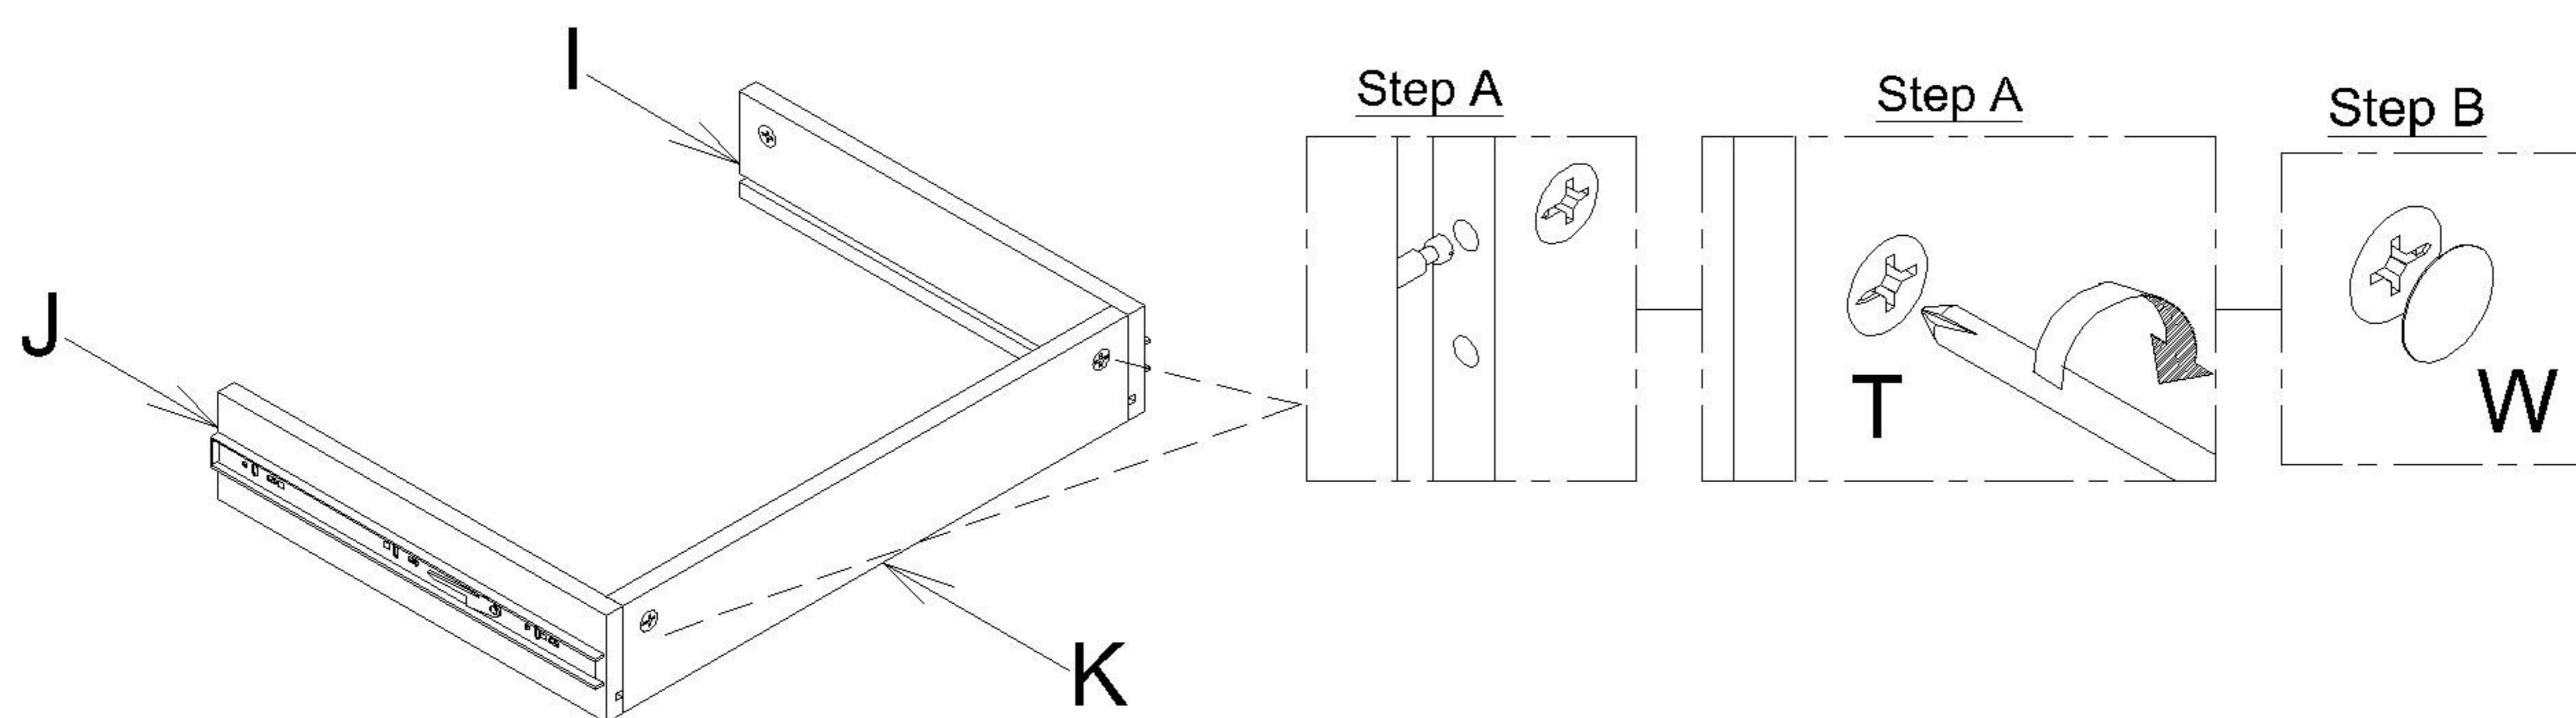


**14** Slot Drawer Base (L) in corresponding grooves. Attach Small Drawer Front (H) to Drawer Box and secure with Cam Lock (T). Use Cam Lock Cover (W) to cover Cam Lock (T).

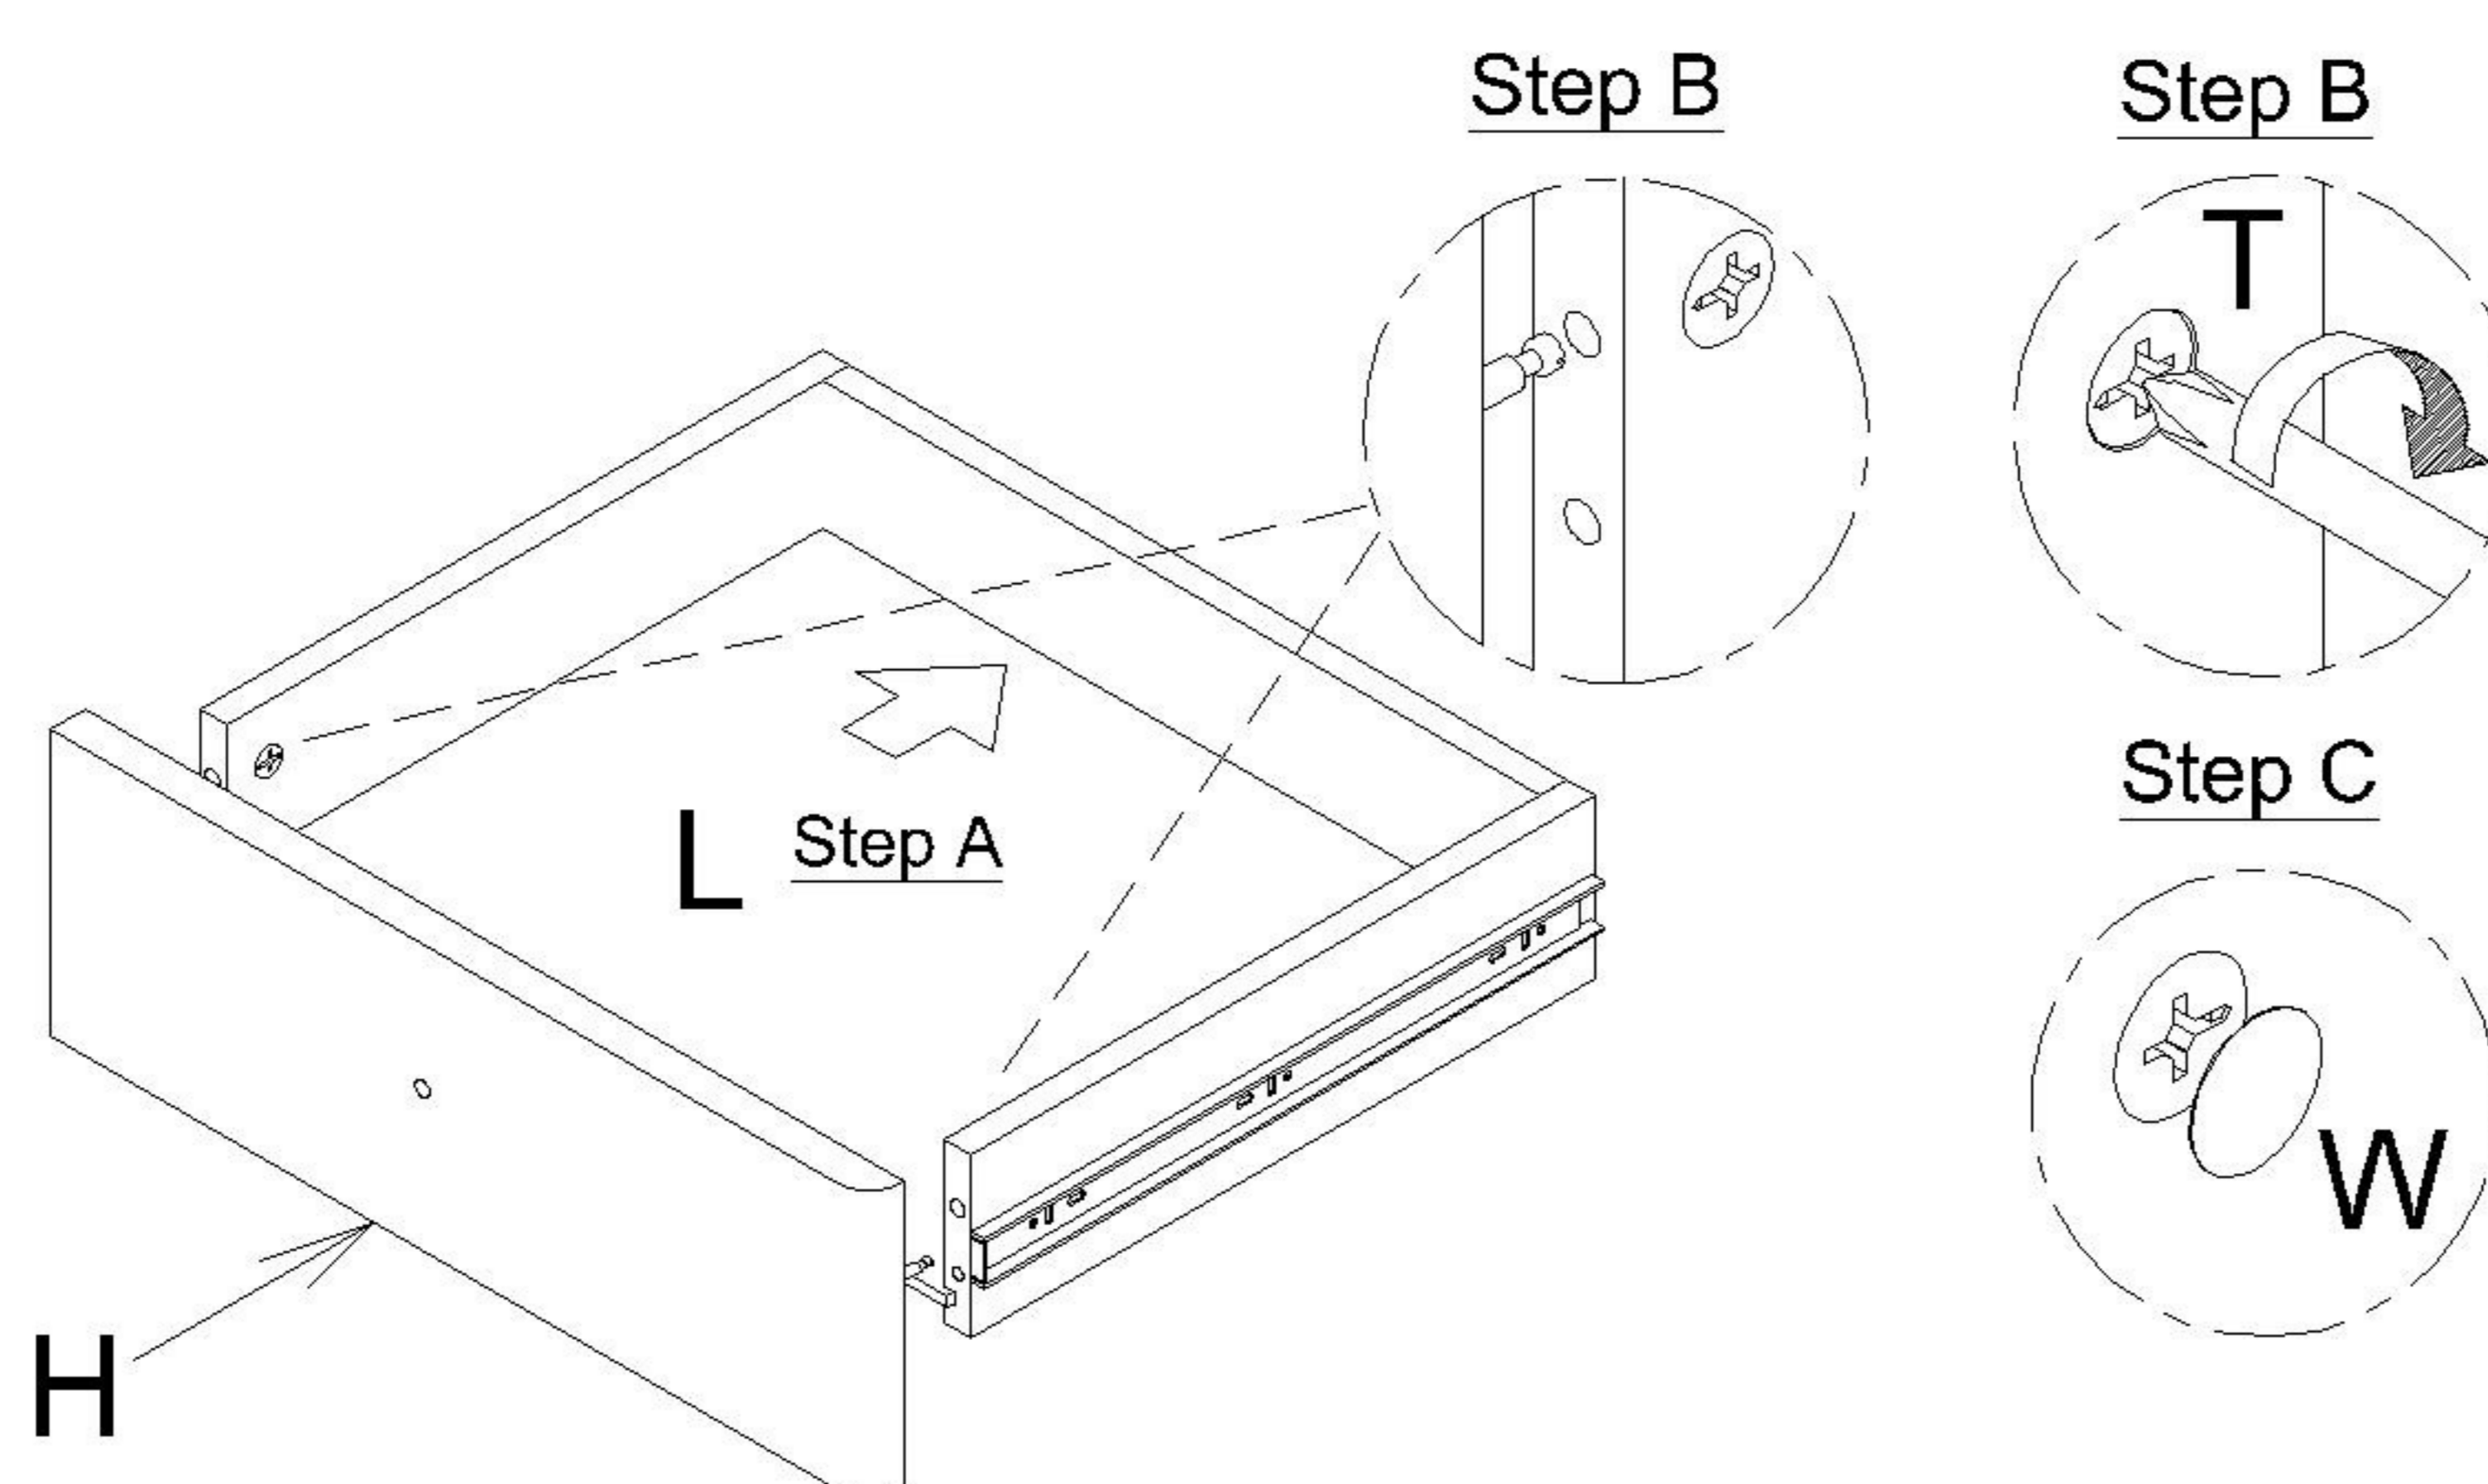


**15** Attach Handle (AC) to Small Drawer Front (H) and secure using Panhead Screw (AD).

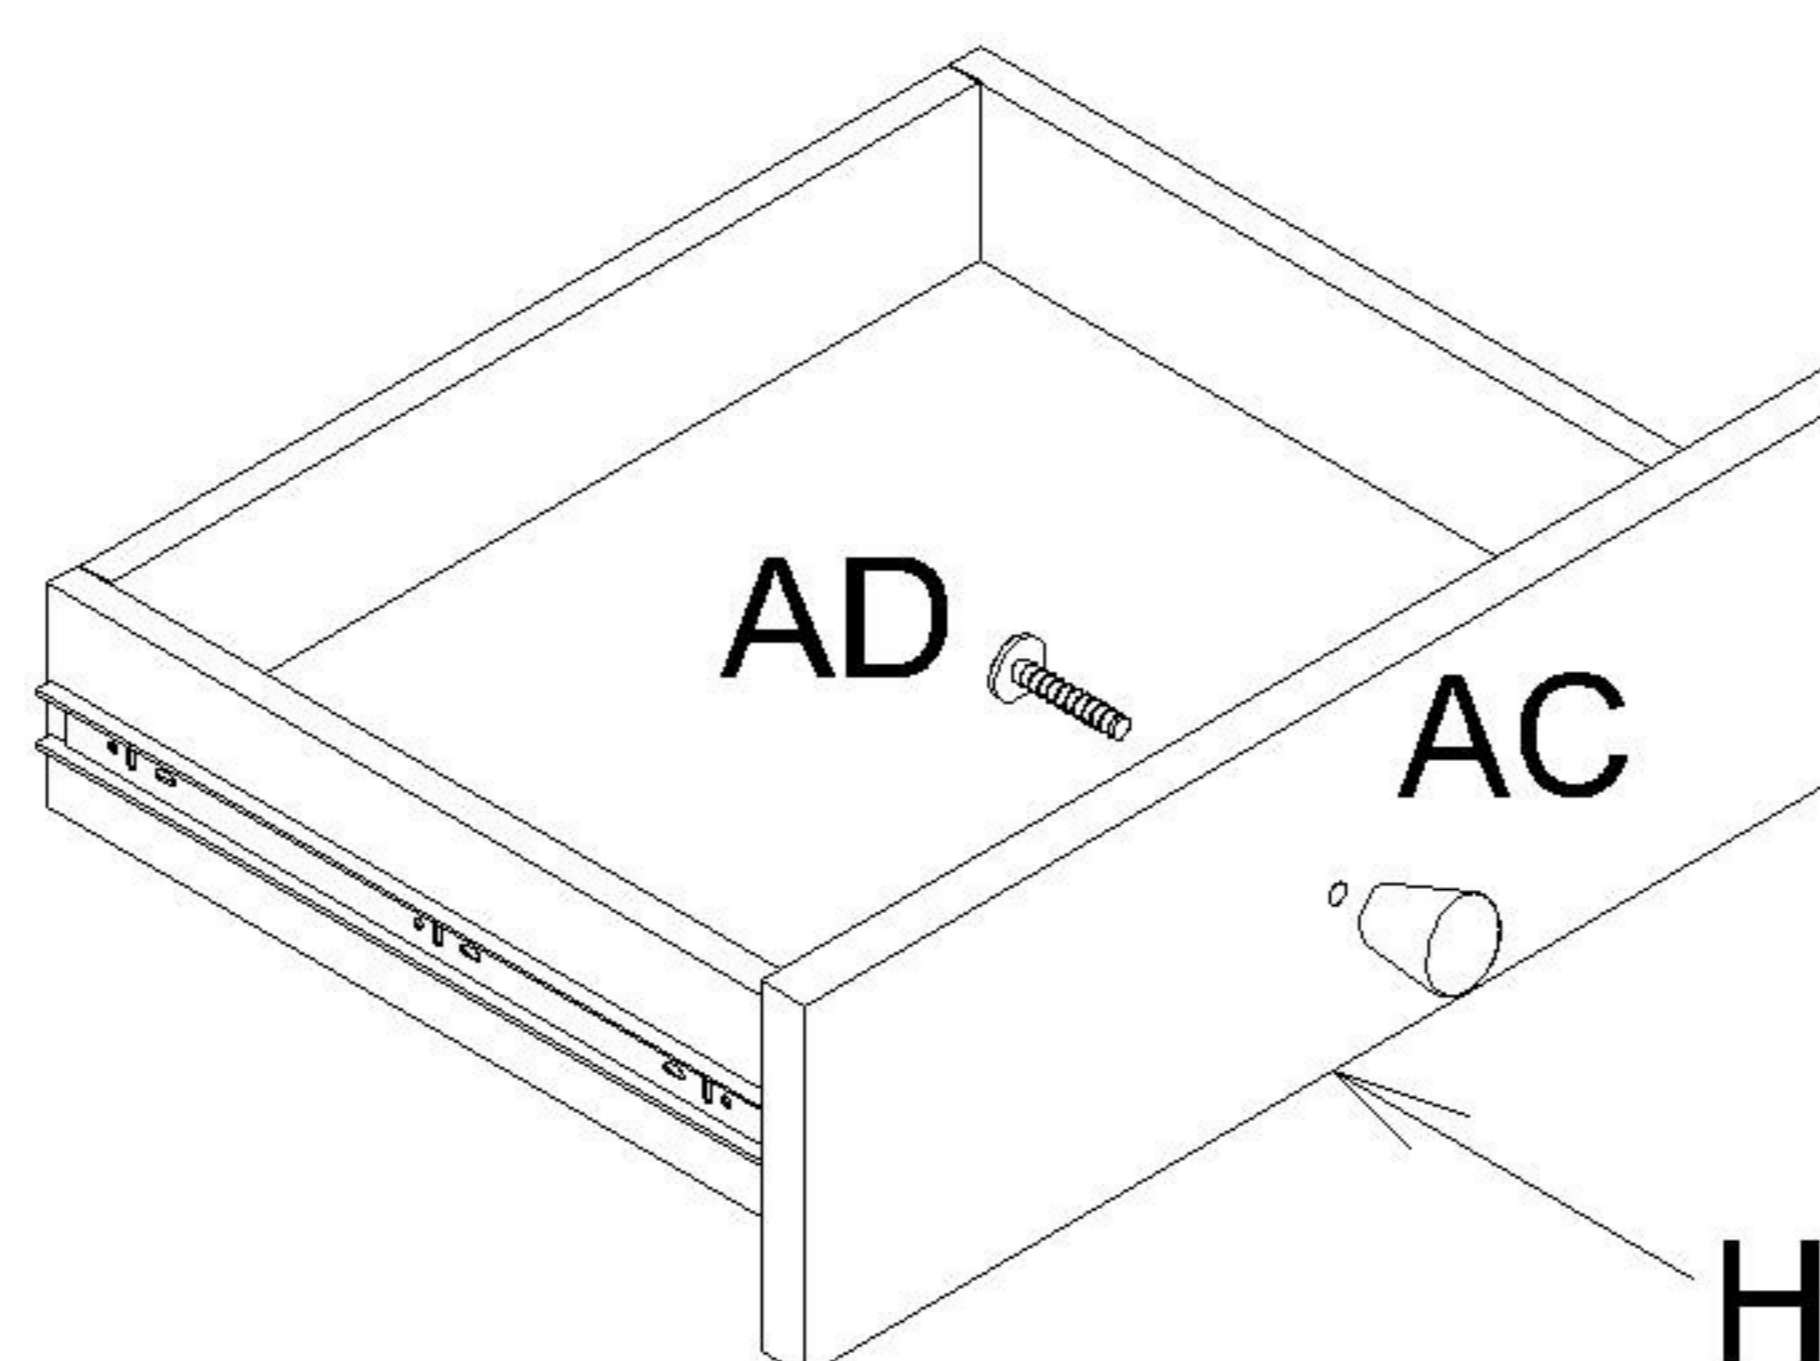


**16** Attach Extension Runner (R) to Left & Right Big Drawer Side (N & O) using Screw (Q) to secure.

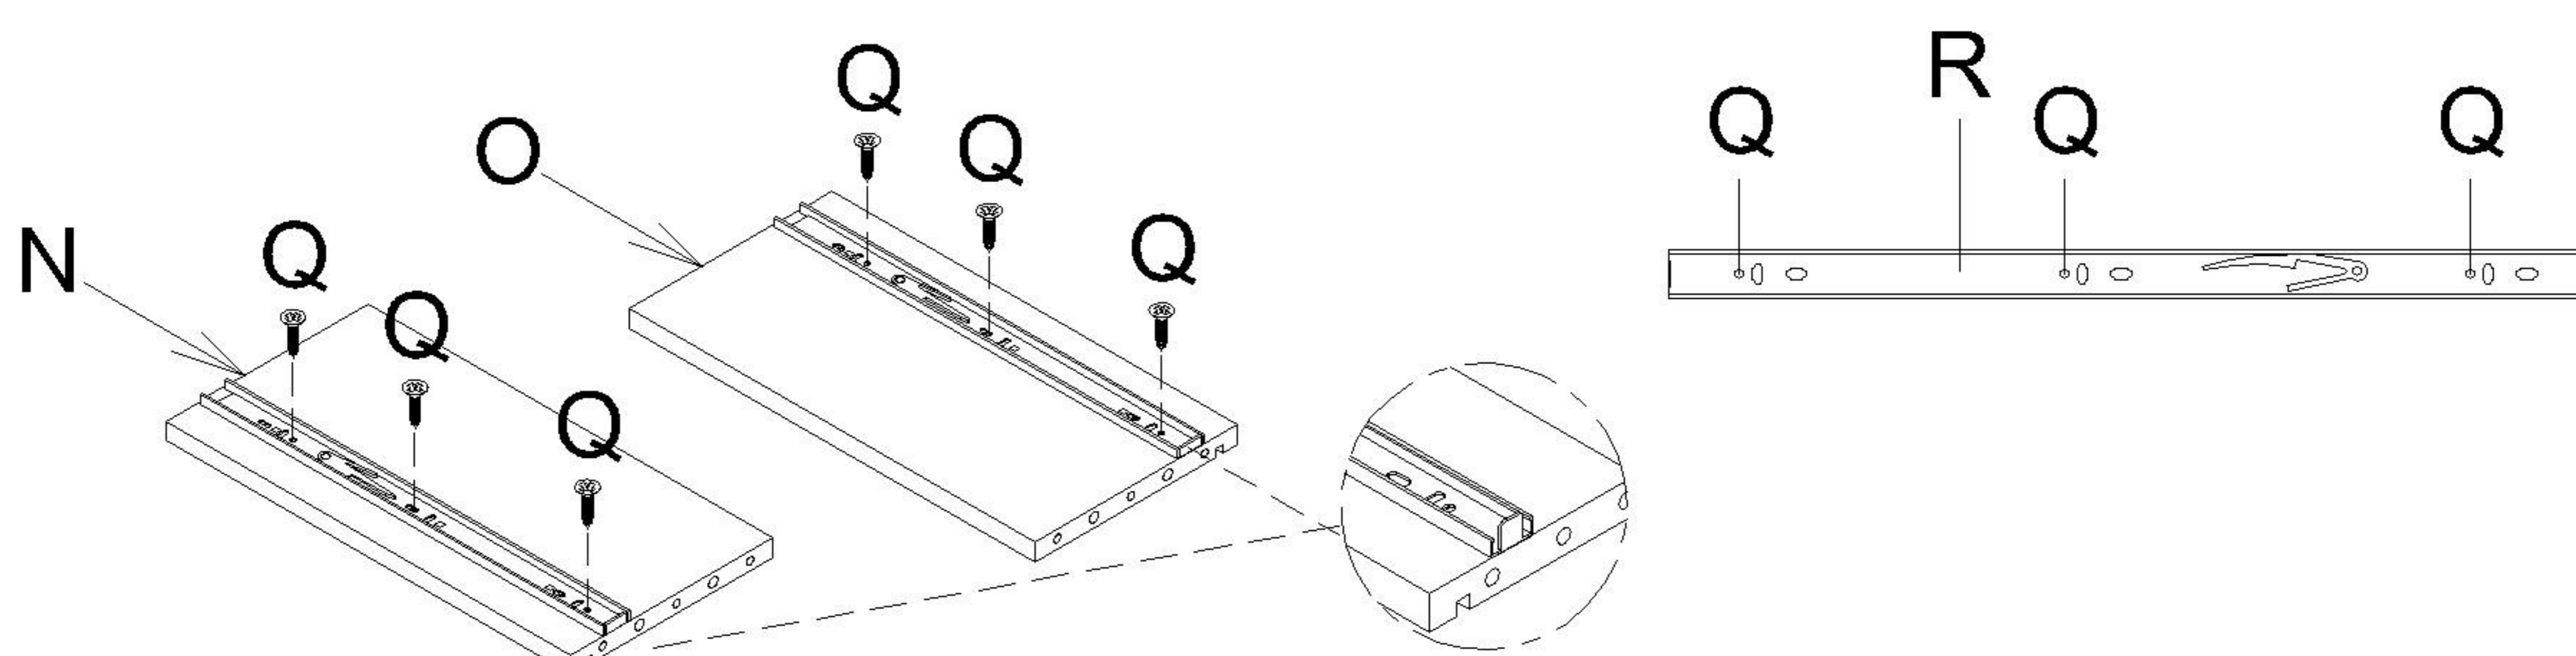


- 17** Flip over Left & Right Big Drawer Side (N & O). Insert Dowel (V) to Left & Right Big Drawer Slide (N & O) & Big Drawer Back (P). Attach Cam Lock (T) to Left & Right Big Drawer Side (N & O) & Big Drawer Back (P). Attach Cam Bolt (U) to Left & Right Big Drawer Side (N & O) & Big Drawer Front (M).

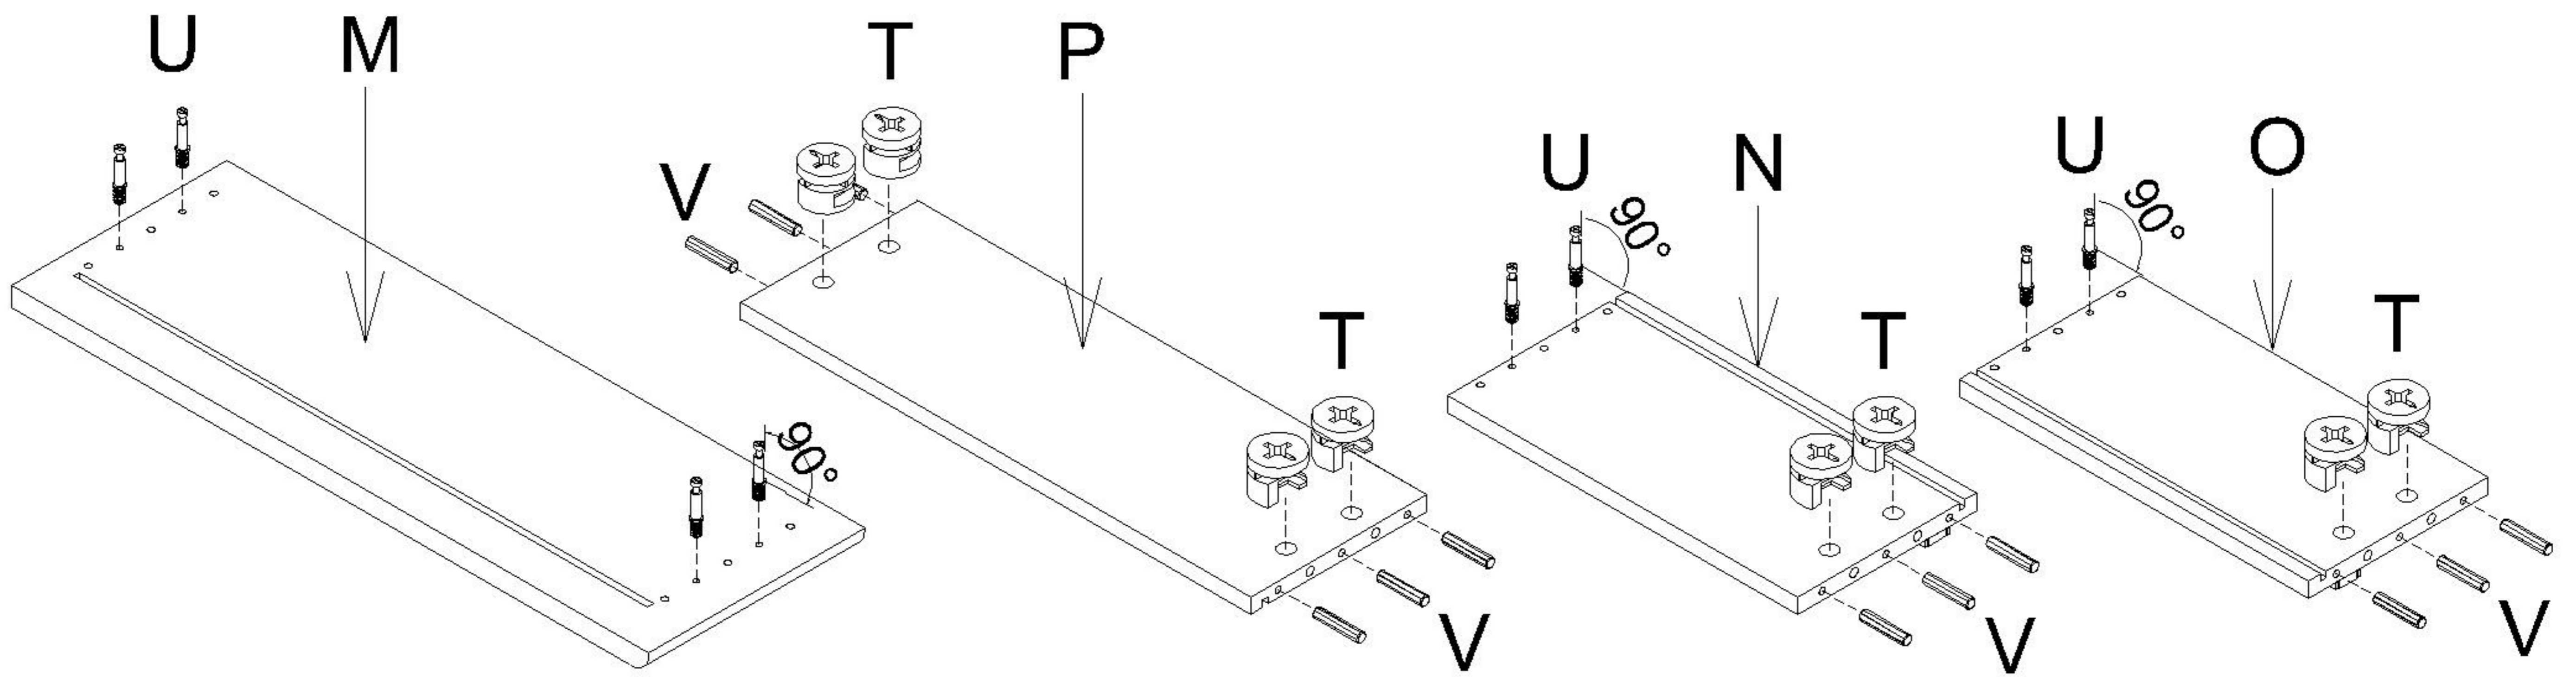

- 18** Attach Left & Right Big Drawer Side (N & O) to Big Drawer Back (P) and secure with Cam Lock (T). Use Cam Lock Cover (W) to cover Cam Lock (T).

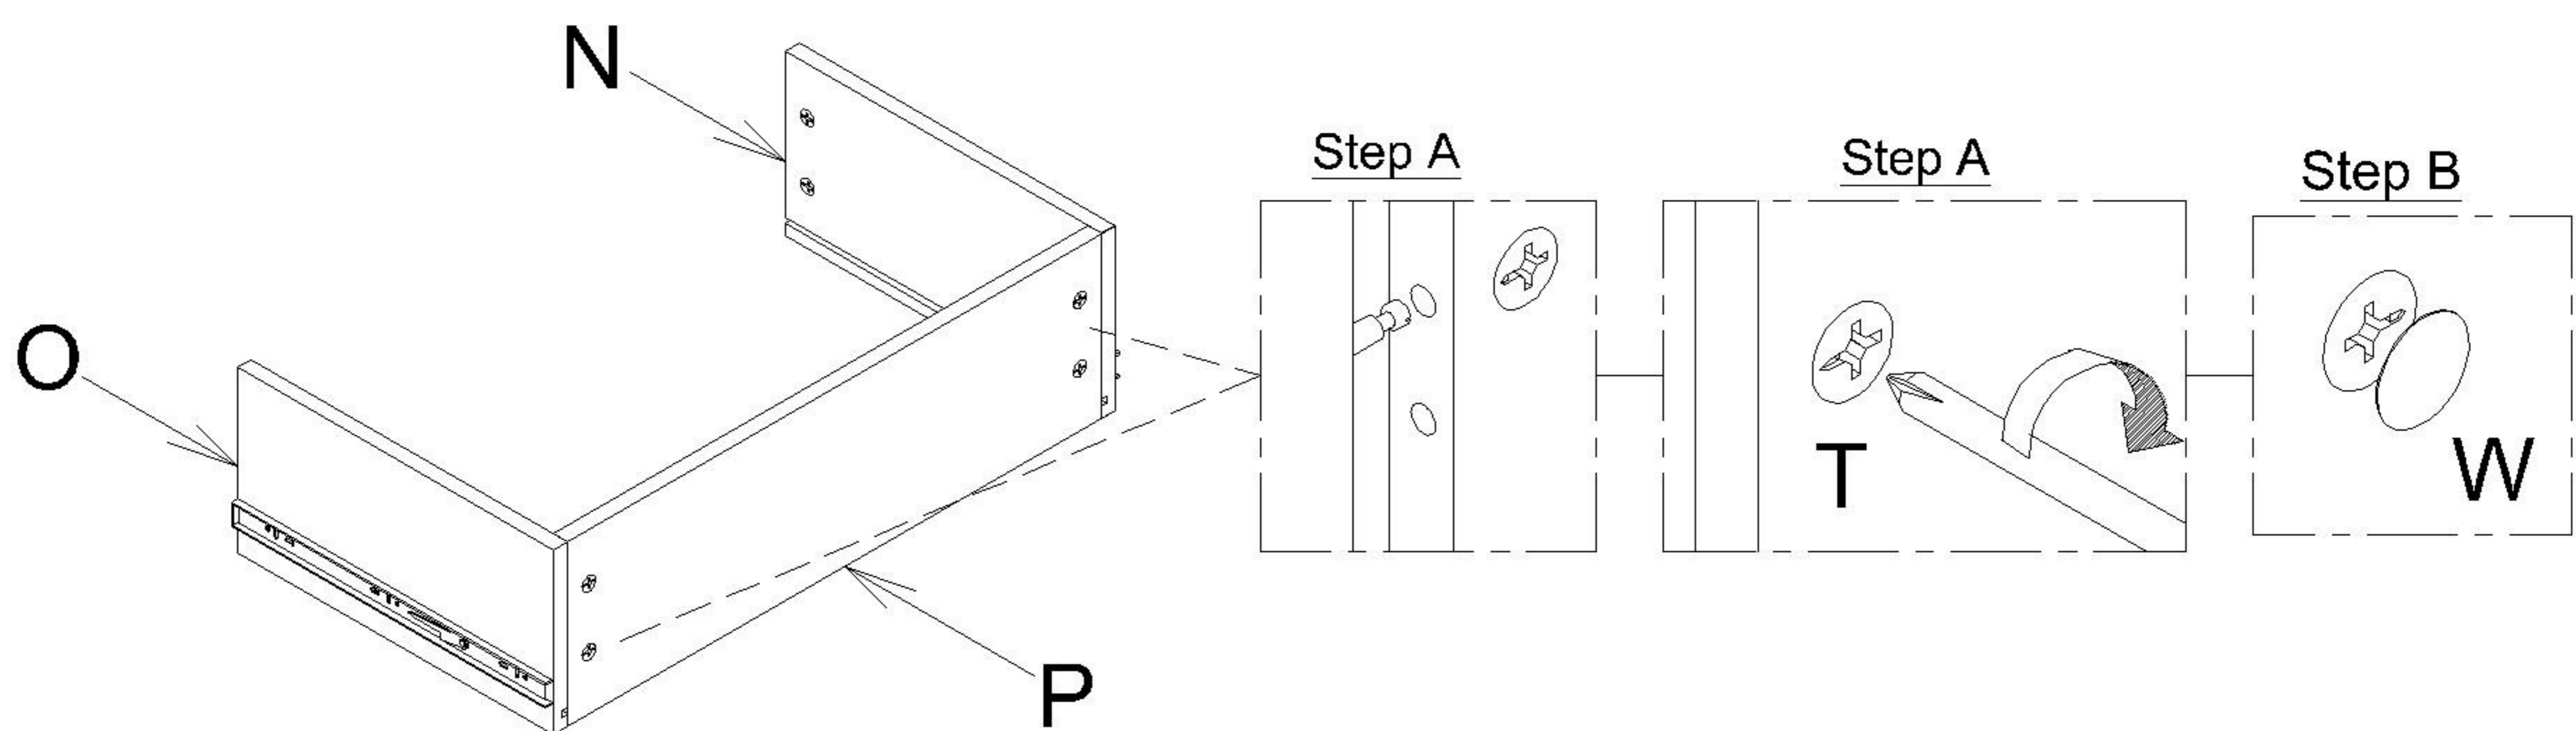


- 19** Slot Drawer Base (L) in corresponding grooves. Attach Big Drawer Front (M) to Drawer Box and secure with Cam Lock (T). Use Cam Lock Cover (W) to cover Cam Lock (T).

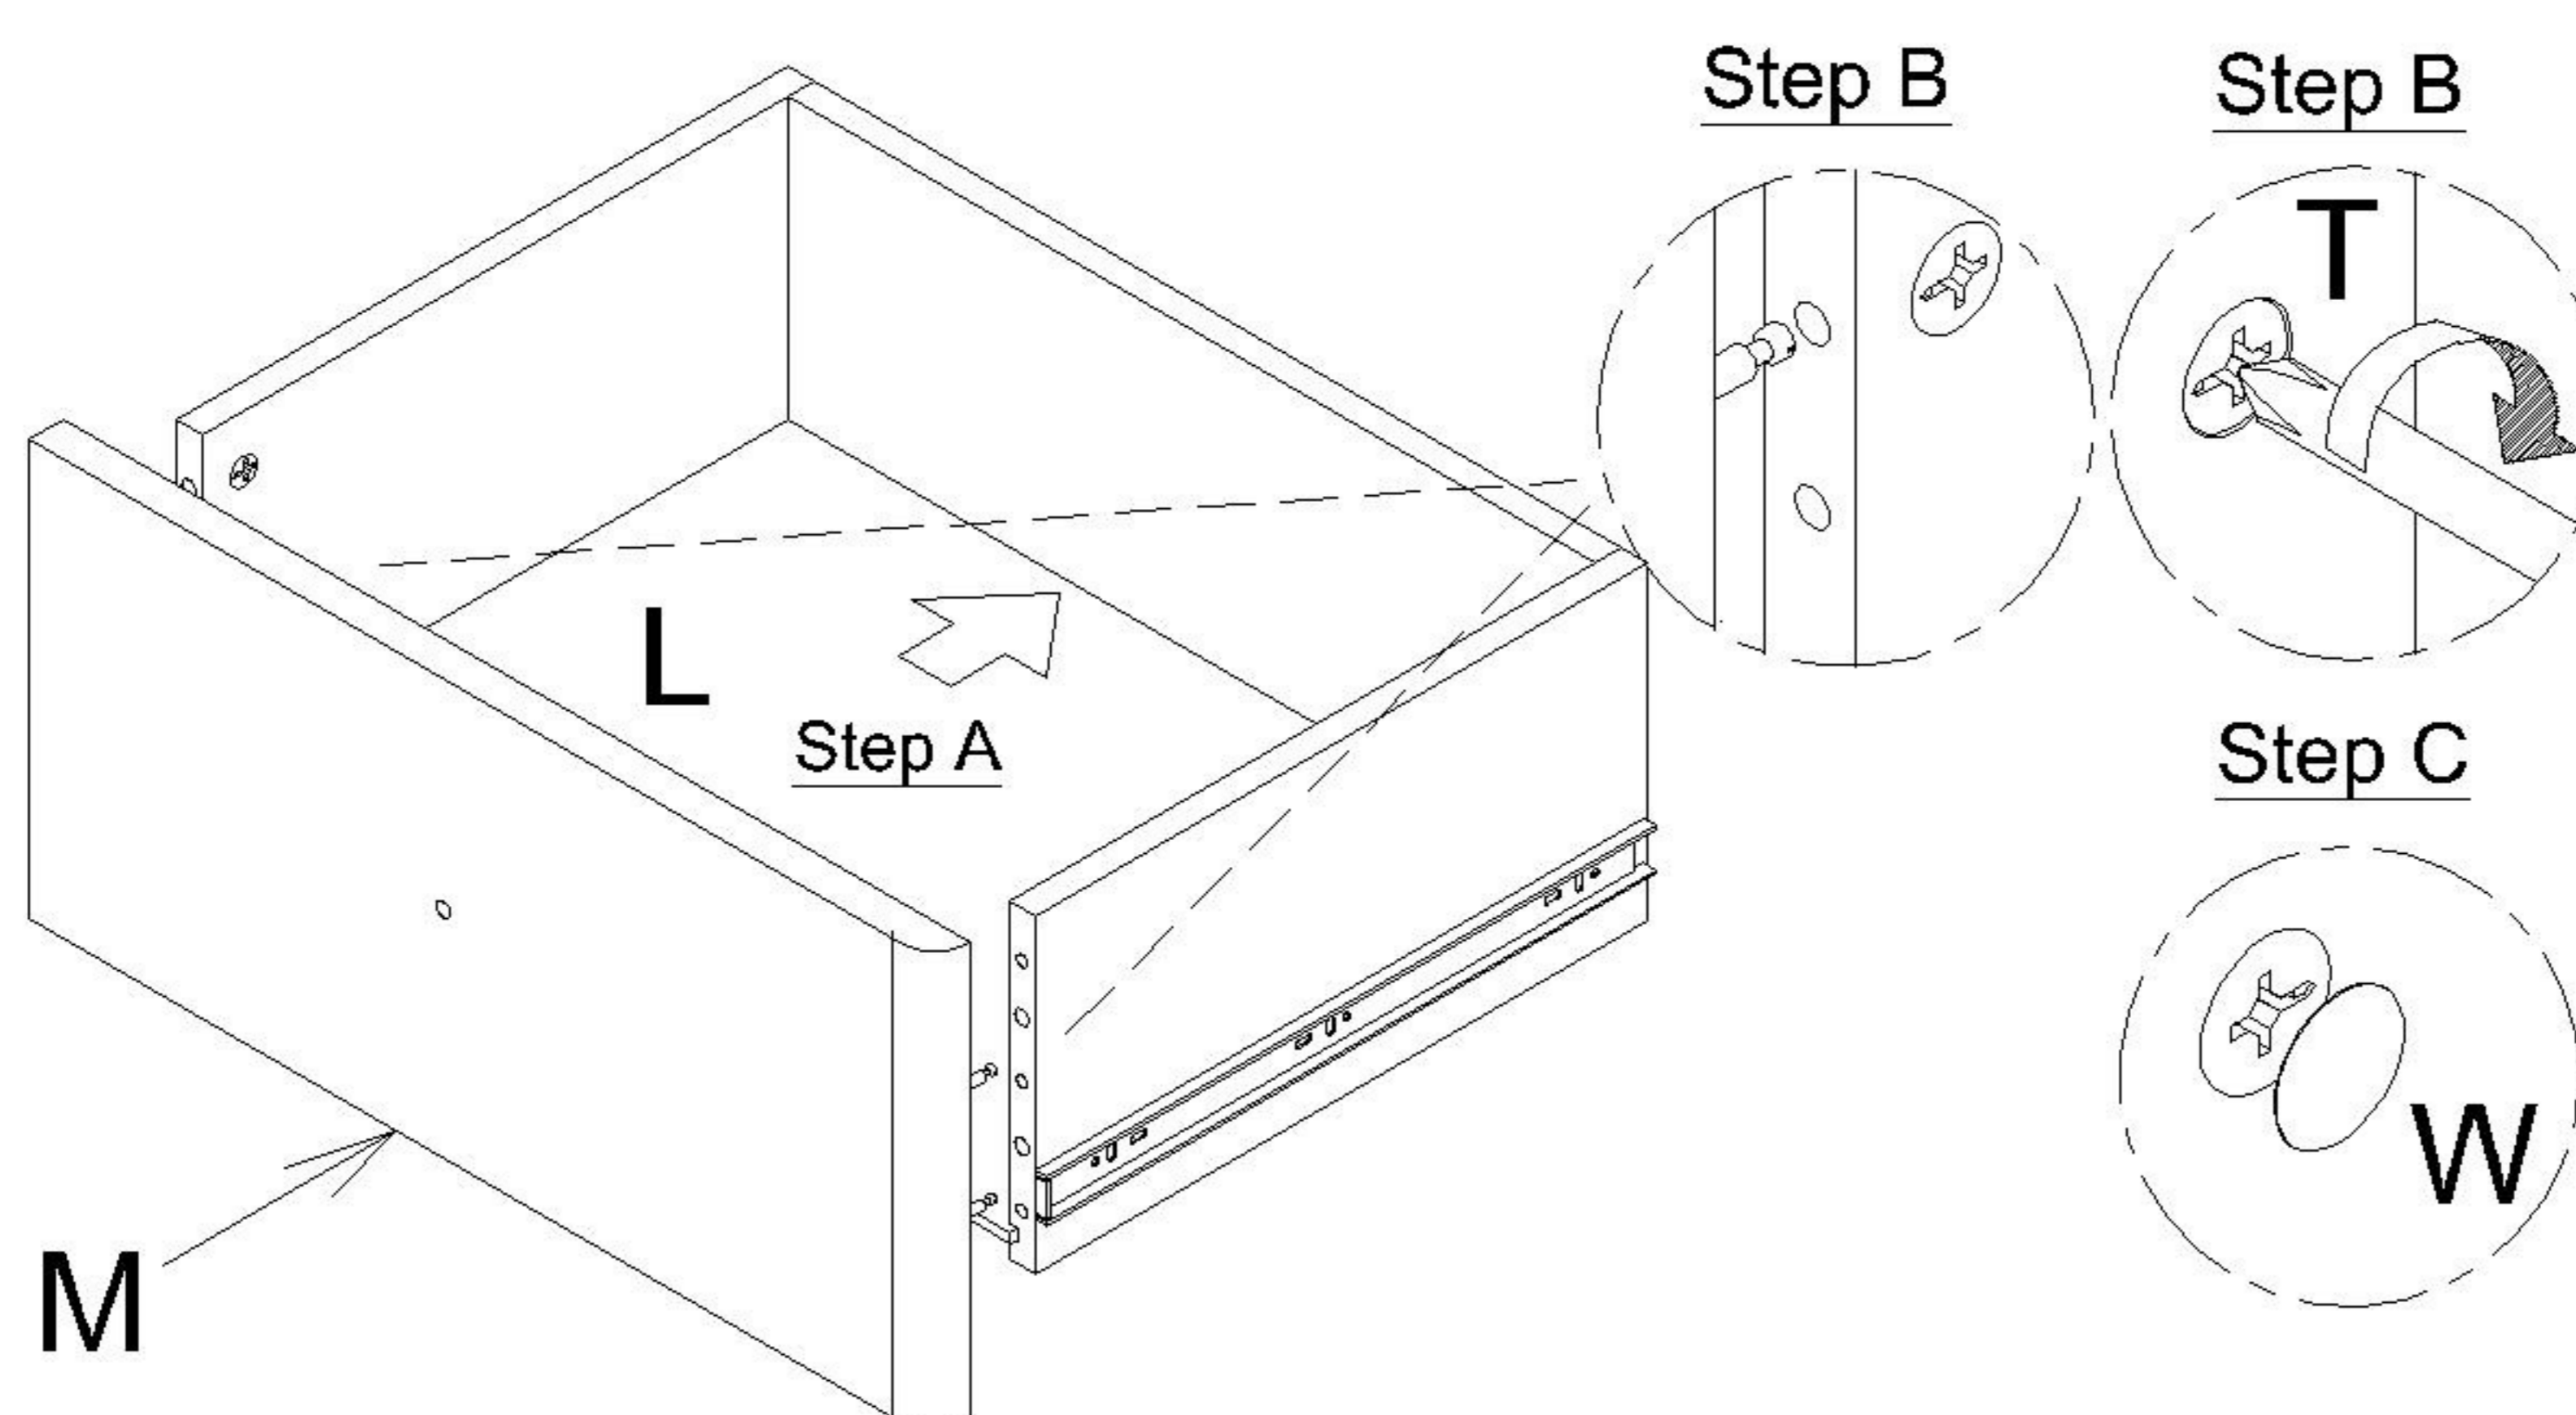


20

Attach Handle (AC) to Big Drawer Front (M) and secure using Panhead Screw (AD).

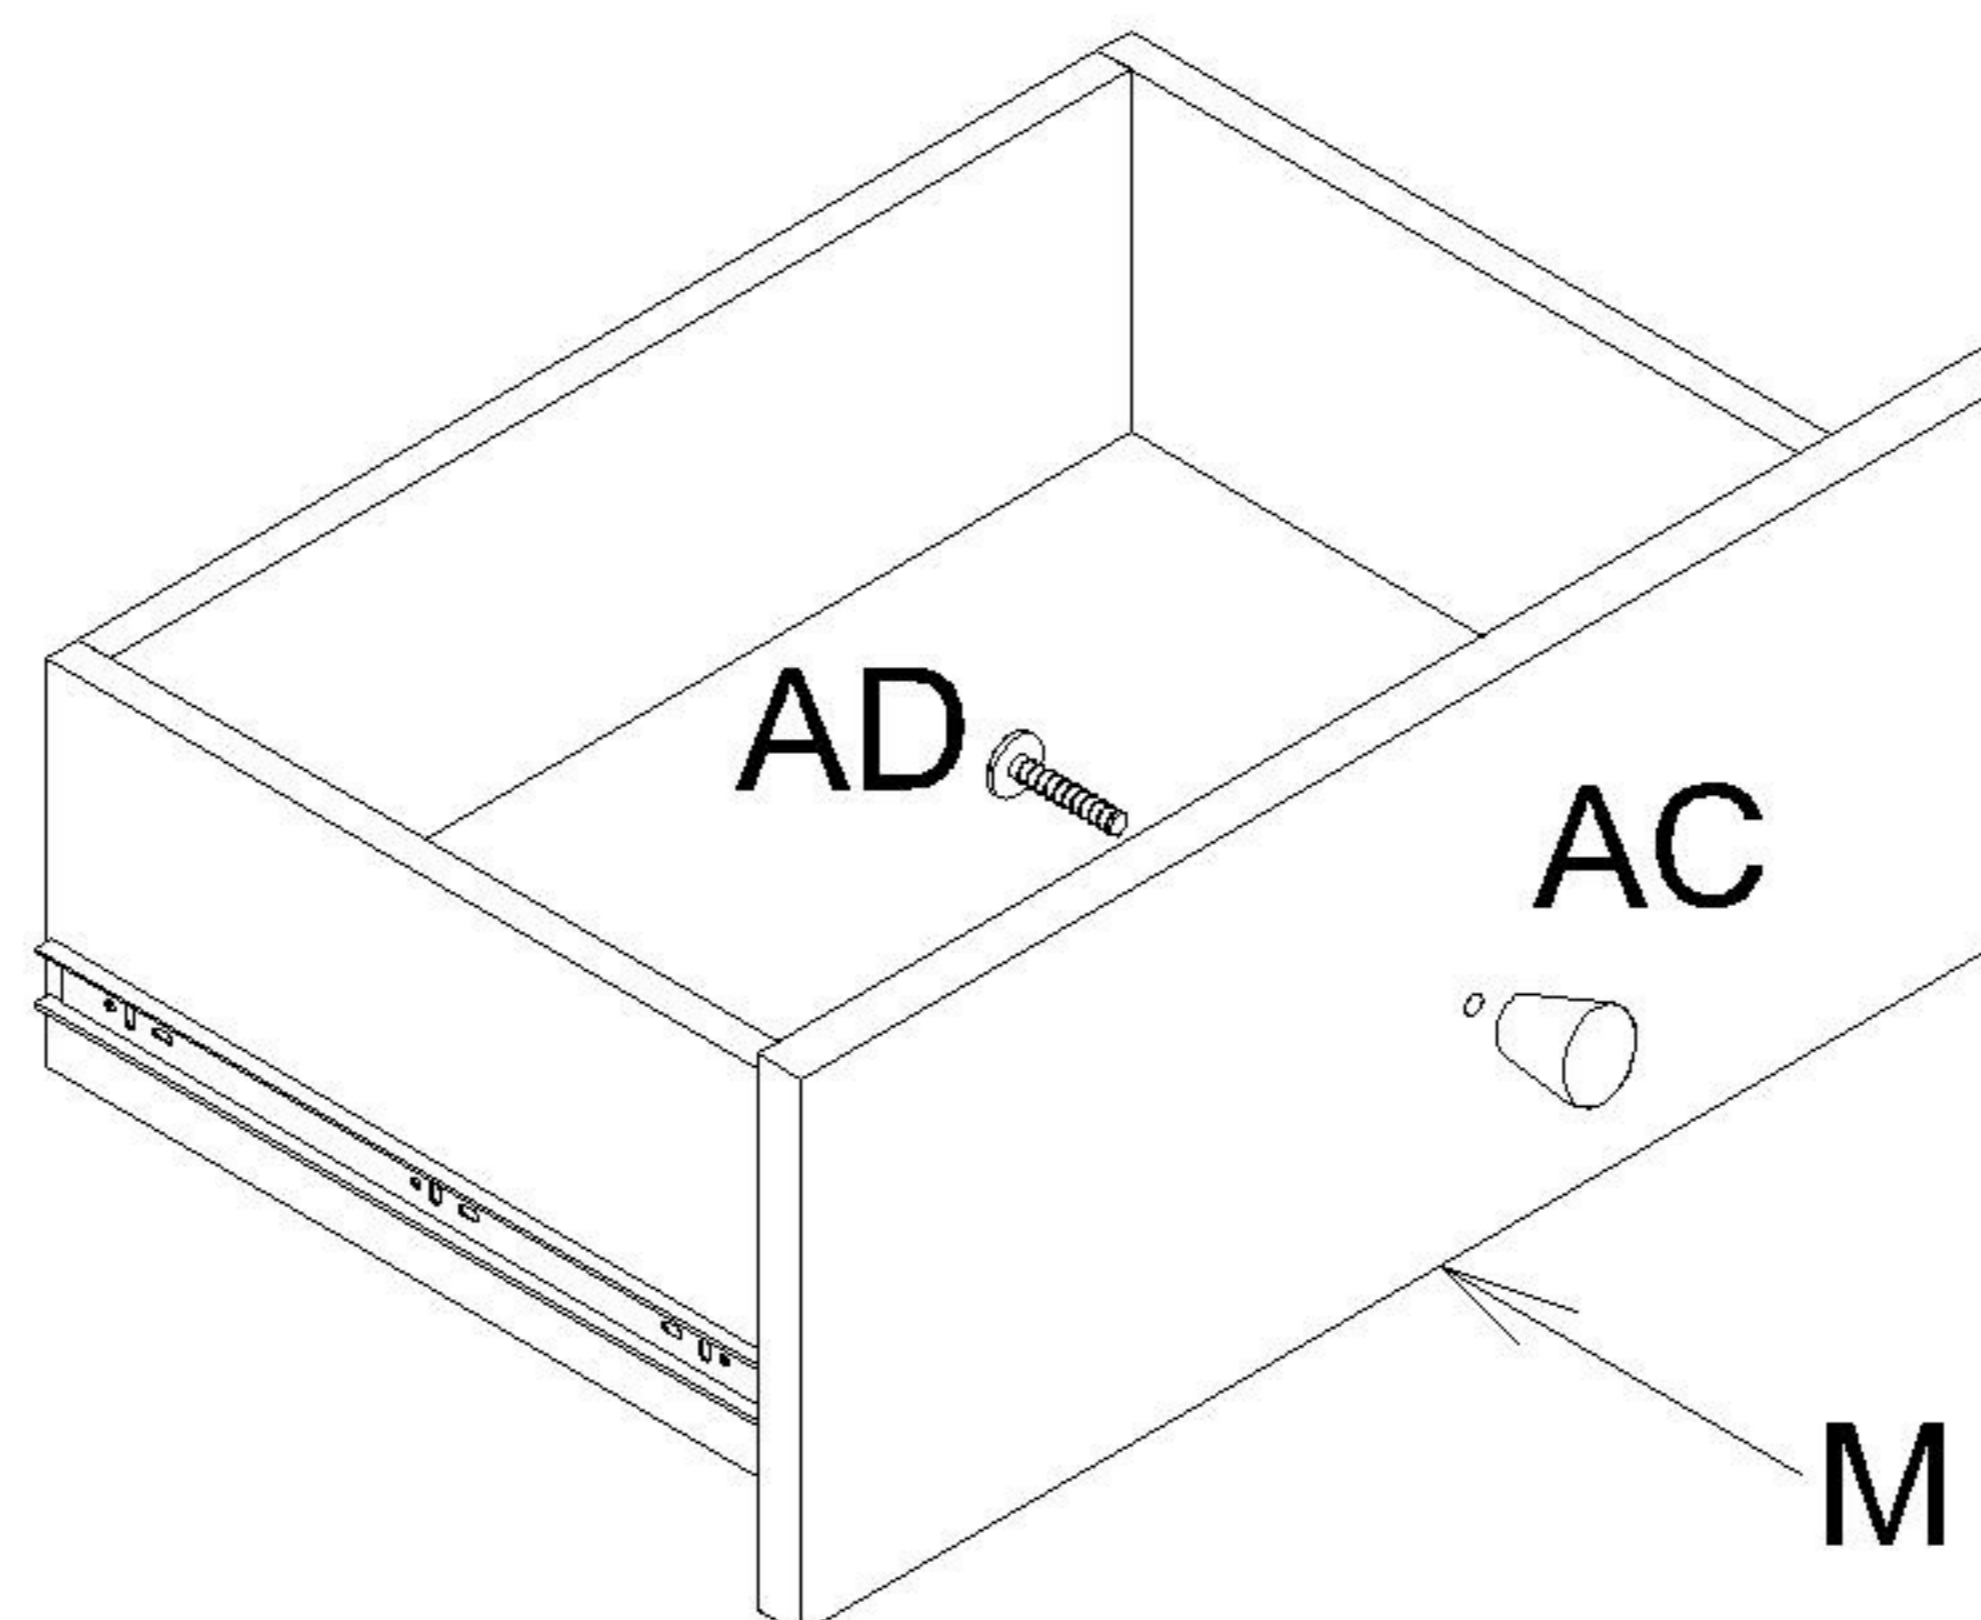


21

Slot Drawers into assembled unit.

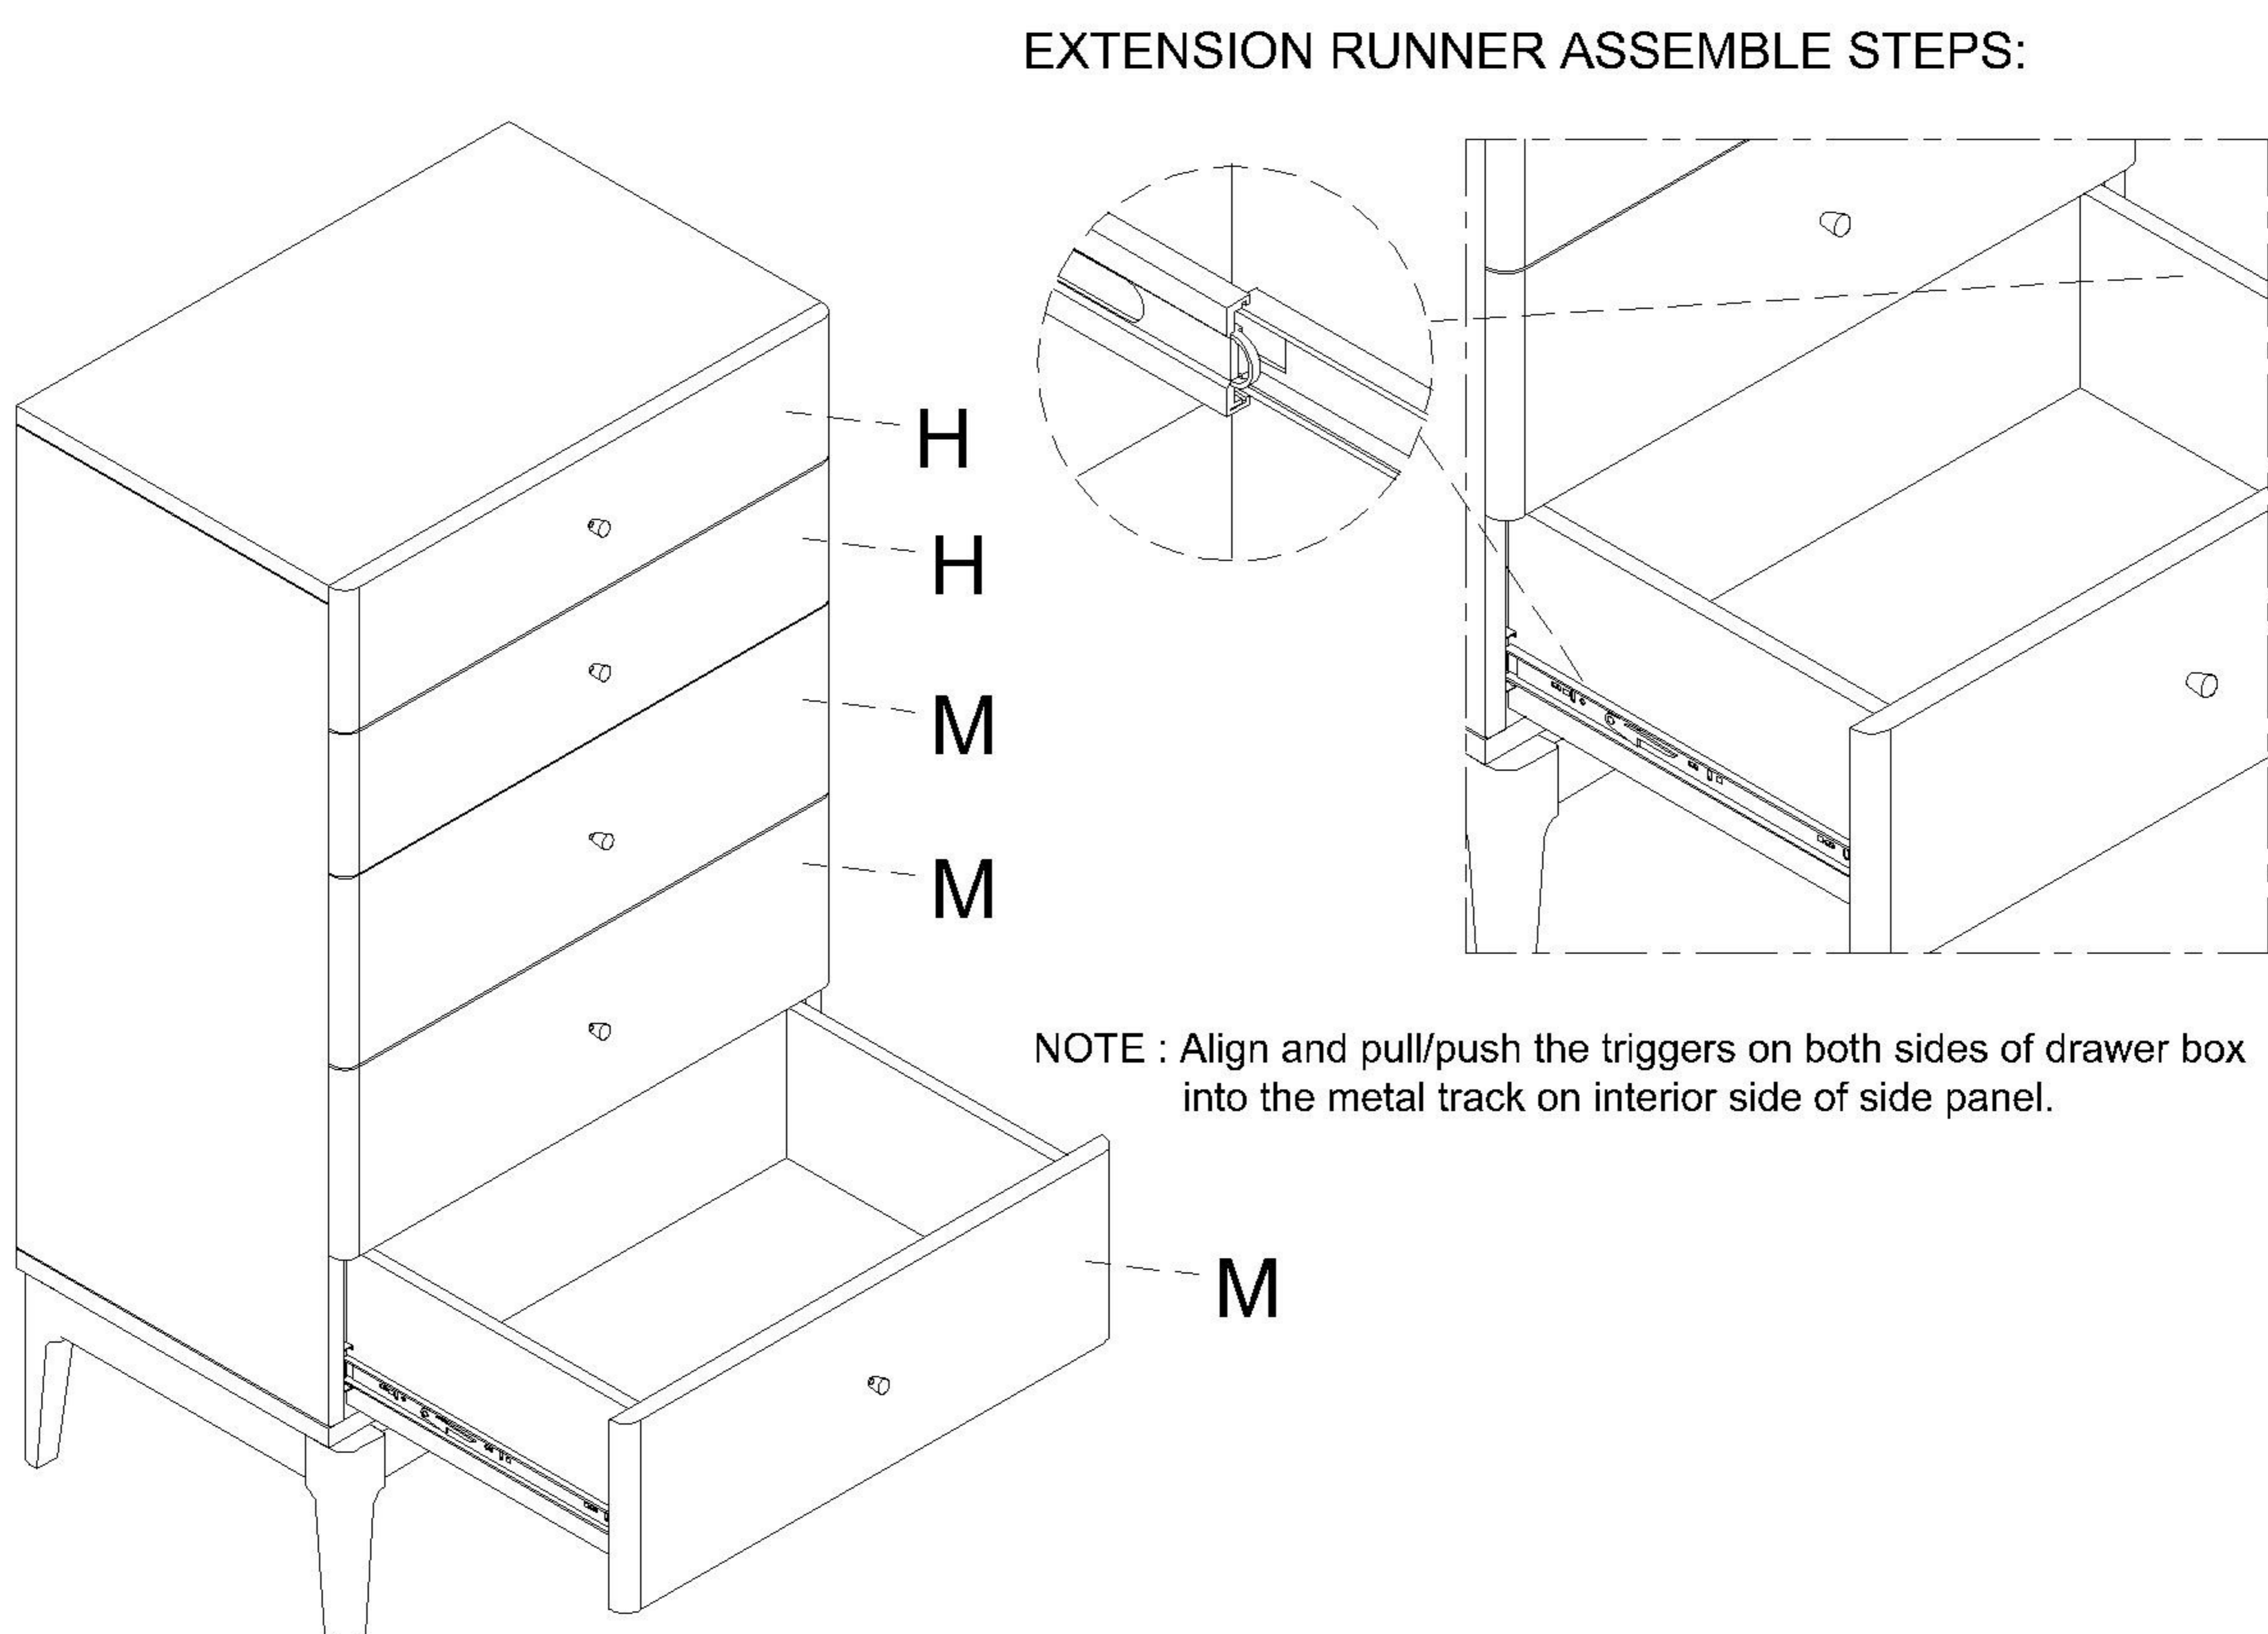

**22**

Attach Anti-Tipping Kit (AE) to wall. Attach Bracket (vertically) to wall using the Long Screw provided. Attach Bracket (vertically) to furniture back (directly below top) with Short Screw. Place Bracket as close to center of furniture back as possible in relation to wall stud and the desired position in the room. Move furniture to its final position. Thread the strap through Bracket, and pull it tight.

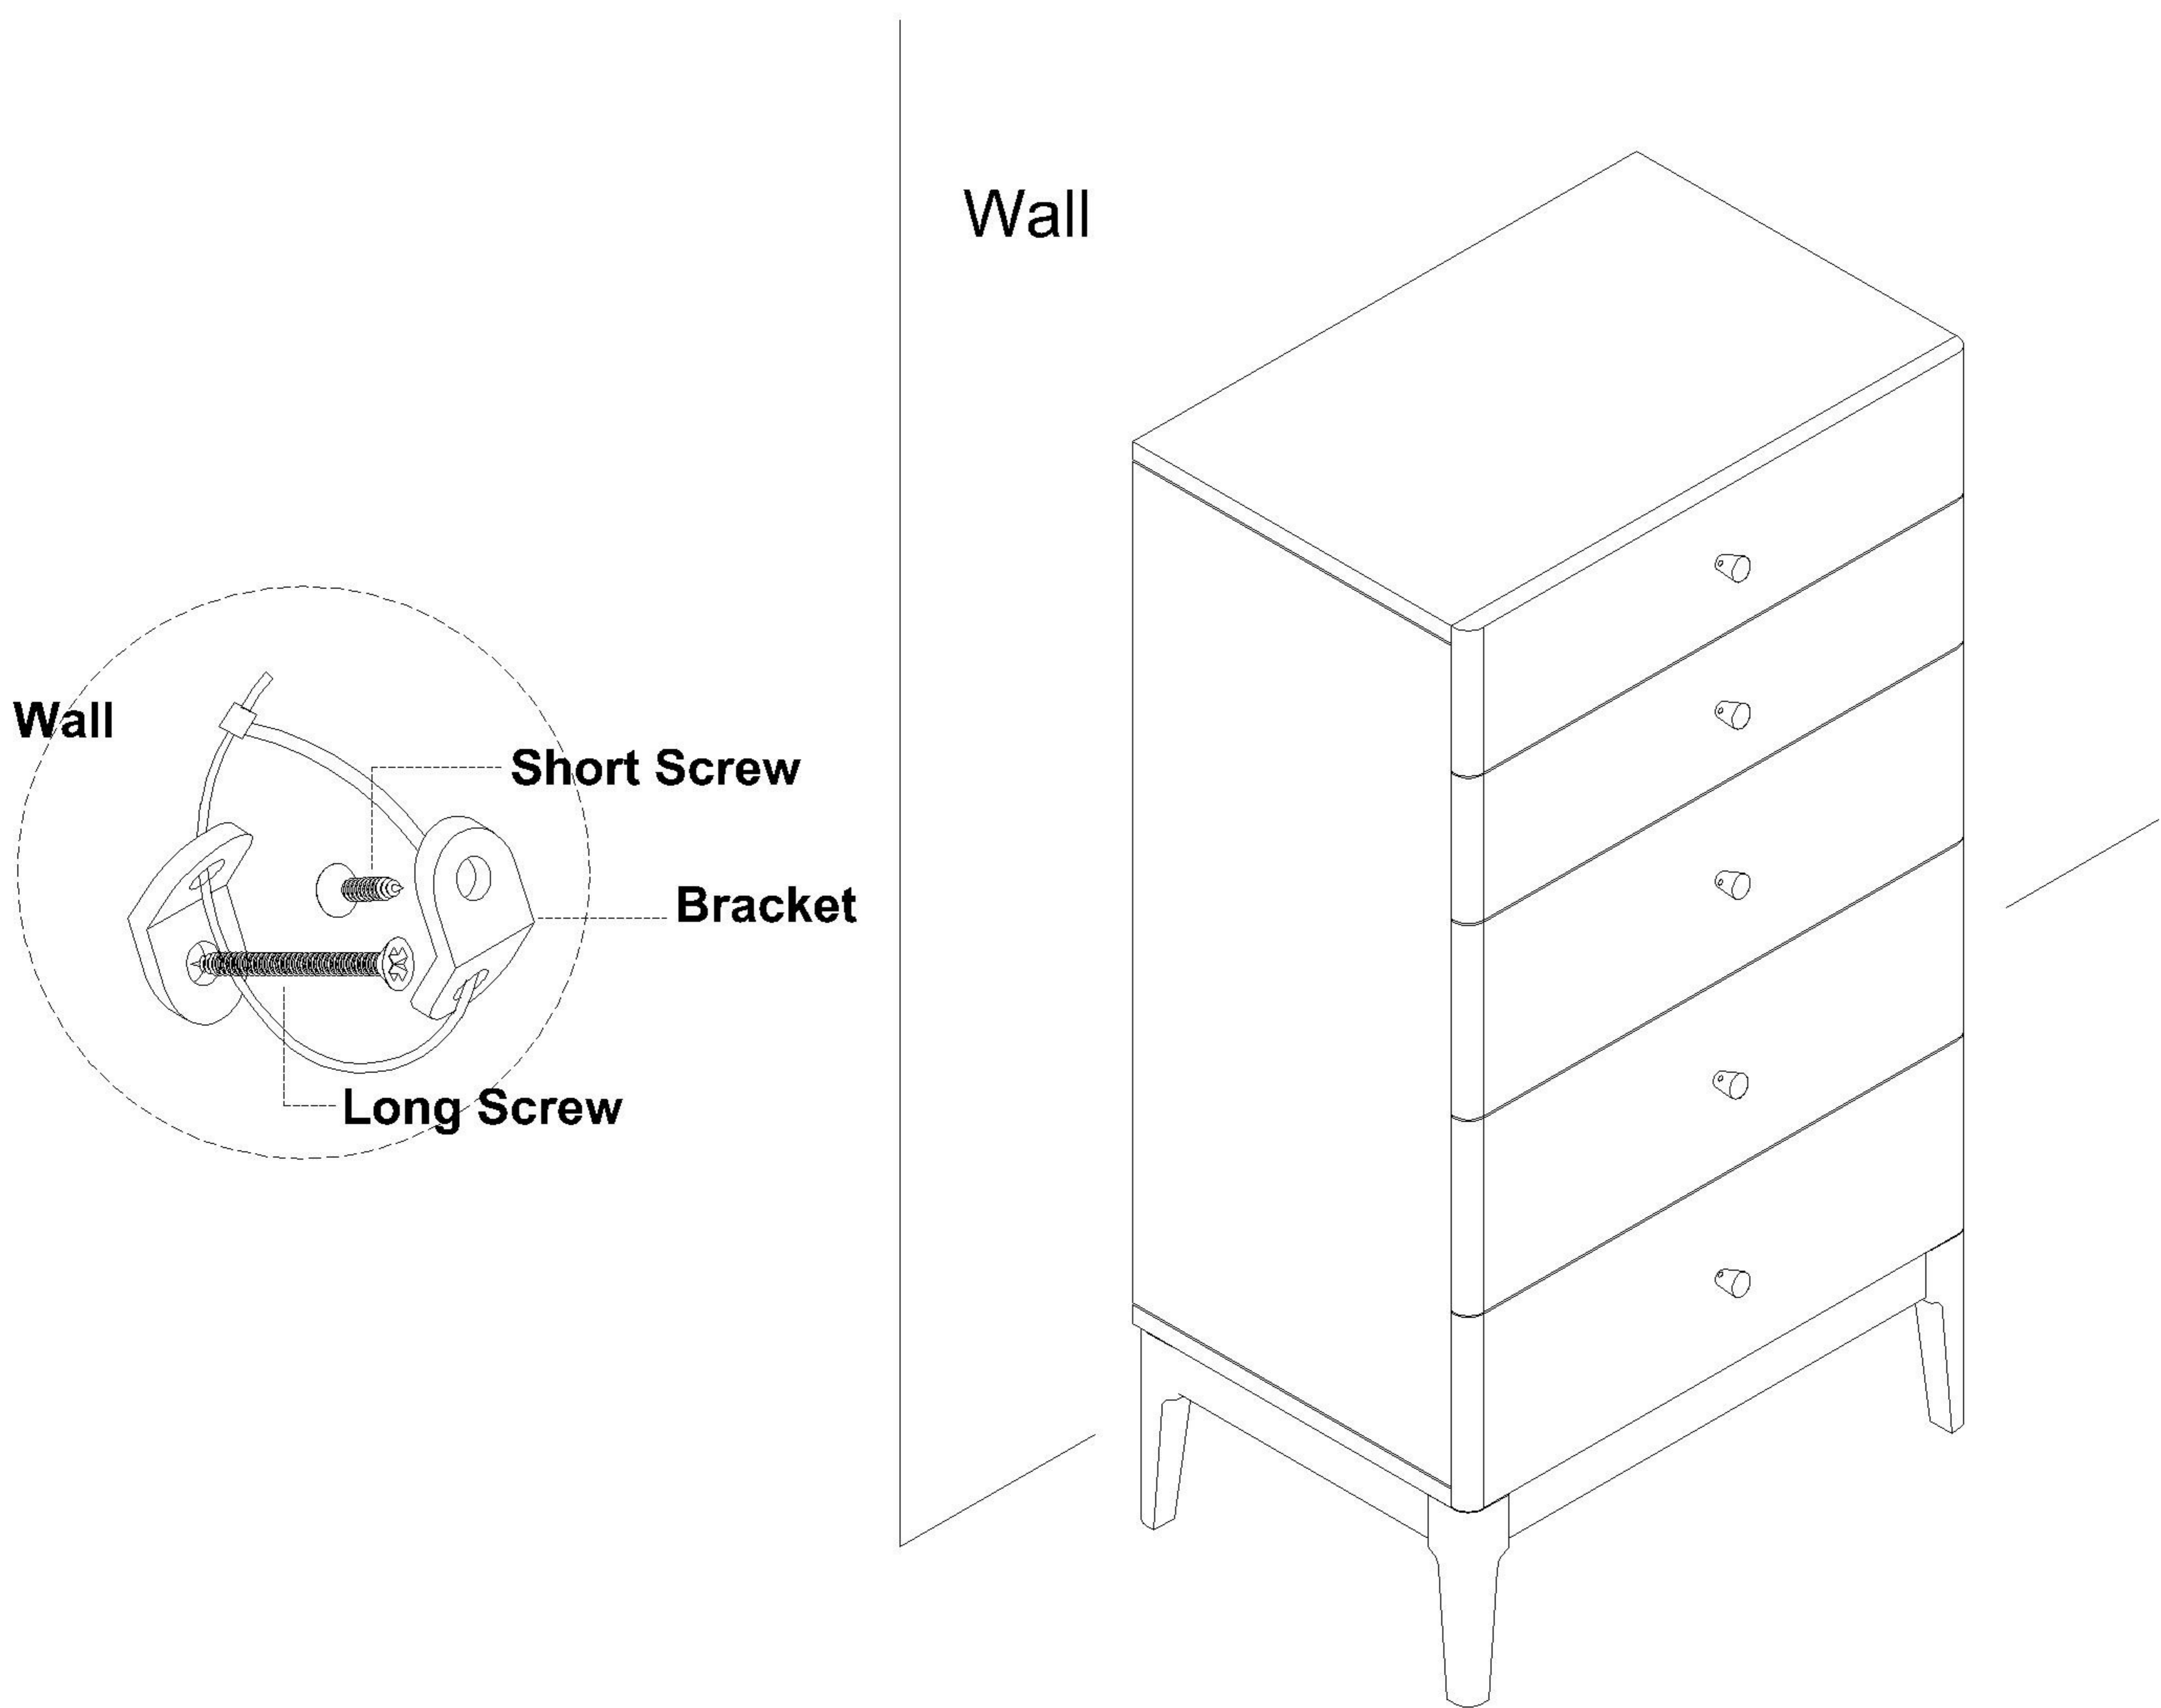

### Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.