






KERRVILLE TWO LIGHT SEMI-FLUSH CONVERTIBLE PENDANT

7715202

General Product Information



WARRANTY



FCC STATEMENT

Tools Required



PHILLIPS-HEAD SCREWDRIVER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



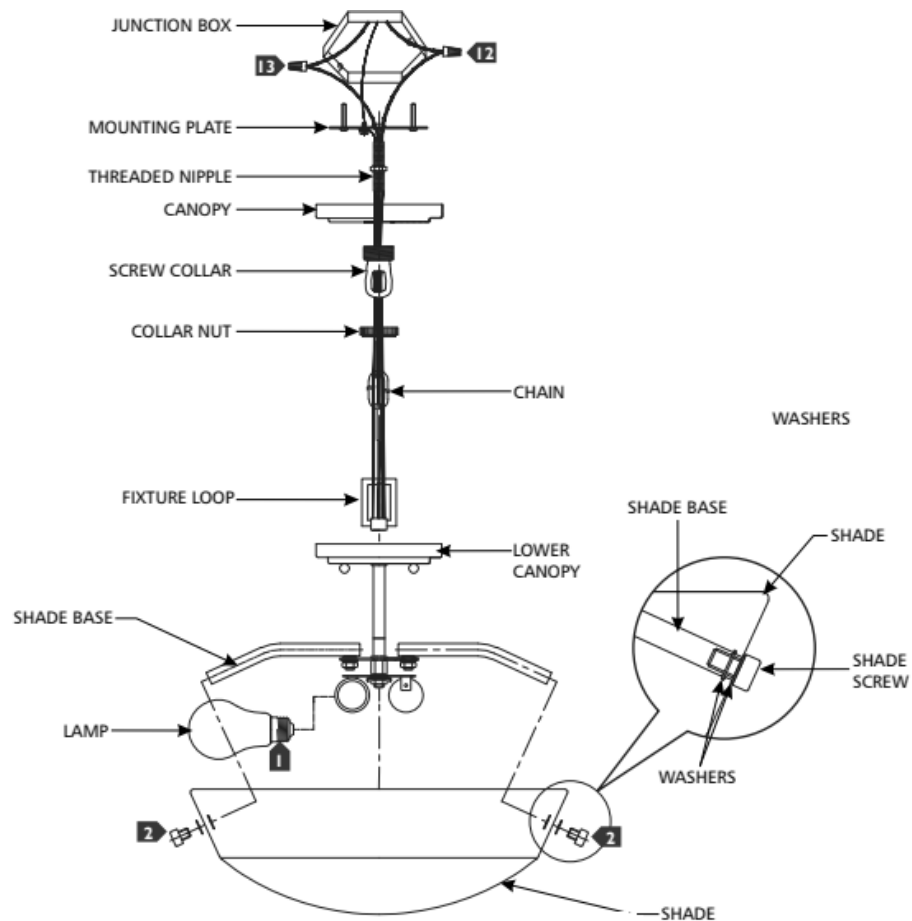

INSTRUCTIONS

I. Preparing the Fixture

1. Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information.
2. Place a washer onto a shade screw, insert the shade screw into the shade, place another washer onto the screw, and tighten the screw into the shade base. Repeat for remaining side.
3. **For Semi-flush mount only:** Unscrew and remove the fixture loop from the lower canopy, then remove the cap nuts.
4. **For Semi-flush mount only:** Install the mounting plate with two mounting studs to the junction box. **Skip to (II). Wiring the fixture.**
5. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
6. Temporarily unscrew and remove the collar nut from the screw collar, then screw the collar tightly onto the threaded nipple.
7. Secure the mounting plate to the junction box.
8. Feed the cord through the fixture loop and screw it onto the canopy. Determine the desired height of the fixture and open a link to remove a portion of the chain from the bottom.
9. Install the canopy and collar nut onto the chain, then install the open link onto the fixture loop and close the link.
10. Weave the cord through the chain and canopy, then trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.

2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire
4. **For Semi-Flush Mount Only:** Align, then place the lower canopy onto the mounting plate studs. Secure with two cap nuts.
5. Neatly place all wires into the junction box, place the canopy onto the ceiling, and screw the collar nut tightly onto the screw collar to secure in place.