ELURA

SOUND + PERFORMANCE

RED SERIES SPEAKER

OWNER'S MANUAL & INSTALLATION GUIDE



ELURA SBR1.2

3-CHANNEL HIGH PERFORMANCE PASSIVE SOUNDBAR

CAUTION	ATTENTION
RISK OF ELECTRIC SHOCK DO NOT OPEN	RISQUE DE CHOC ELECTRIQUE NE PAS OUVRIR

WARNING:

To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.

AVIS:

Pour réduire le risque d'incendie ou de choc électrique, ne pas exposer cet appareil sous la pluie et l'humidité.

The apparatus shall not be exposed to dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on apparatus.

L'appareil ne doit pas être exposé aux écoulements ou aux éclaboussures et aucun objet ne contenant de liquide, tel qu'un vase, ne doit être placé sur l'objet.

The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

Le symbole de l'éclair fléché dans un triangle équilatéral, est destiné à alerter l'utilisateur de la présence d'une "tension dangereuse" dans le boîtier du produit qui peuvent être des ampleur suffisante pour constituer un risq e d'électrocution aux personnes.

This symbol is intended to alert the user to the presence of important operation and maintenance (servicing) instructions in the literature accompanying the appliance.

Ce symbole est destiné à alerter l'utilisateur de la présence d'opération et de maintenance (entretien) dans la documentation accompagnant l'appareil.

Important Safety Instructions

1. Read these Instructions.
   Lisez ces instructions.
2. Keep these Instructions.
   Conservez ces instructions.
3. Heed all Warnings.
   Respectez tous les avertissements.
4. Follow all instructions.
   Suivez toutes les instructions.
5. Do not use this apparatus near water.
   Ne pas utiliser cet appareil près de l'eau.
6. Clean only with a dry cloth.
   Nettoyer uniquement avec un chiffon sec.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
   Ne pas bloquer les ouvertures de ventilation. Installer conformément aux instructions du fabricant.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
   Ne pas installer près de sources de chaleur telles que radiateurs, registres de chaleur, poêles ou autres appareils (y compris les amplificateurs) produisant de la chaleur.
9. Do not defeat the safety purpose of the polarized or grounding - type plug. polarized plug has two blades with one wider than the other. When the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
   Ne détruisez pas la sécurité de la terre ou polarisées - fiche. Une fich polarisée possède deux lames dont une est plus large que l'autre. Si la fiche fournie ne rentre pas dans votre prise, consultez un électricien pour remplacer la prise obsolète.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
    Protégez le cordon d'alimentation d'être piétiné ou pincé, particulièrement au niveau des fiches, des prises, et le point où ils sortent de l'appareil.
11. Only use attachments/accessories specified by the manufacturer.
    N'utilisez que des accessoires spécifiés par le fabricant.
12. Use only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart or rack is used, use caution when moving the cart/apparatus, combination to avoid injury from tip-over.



    Utilisez uniquement un chariot, stand, trépied, support ou table spécifiés par le fabricant ou vendu avec l'appareil. Quand un panier ou rack est utilisé, faites attention lorsque vous déplacez l'ensemble chariot / appareil, pour éviter d'éventuelles blessures en cas de chute.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
    Débranchez cet appareil pendant les orages ou lorsqu'il n'est pas utilisé pendant de longues périodes de temps.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
    Confiez toute réparation à un personnel qualif é. Une réparation est nécessaire lorsque l'appareil a été endommagé de quelque façon que ce cordon d'alimentation ou la fiche est endommagé, liquide a été renversé ou des objets sont tombés dans l'appareil, l'appareil a été exposé à la pluie ou à l'humidité, ne fonctionne pas normalement, ou s'il est tombé.
15. **WARNING:** The appliance coupler is used as disconnect device, the disconnect device shall remain readily operable.
    AVERTISSEMENT: *La fiche d'alimentation (appareil coupleur) est utilisé comme dispositif de déconnexion, le dispositif de déconnexion doit rester facilement accessible.*
16. No naked flame sources, such as lighted candles, should be placed on the apparatus.
    Aucune source de flamme nue, telle que des bougies allumées, ne doit être placé sur l'appareil
17. Protective earthing terminal. The apparatus should be connected to a mains socket outlet with a protective earthing connection.



    Borne de terre de protection. L'appareil doit être connecté à une prise secteur avec une prise de terre.

Quick Start Guide

• Place the SBR1.2
Position below or above your TV, or mount to a wall or compatible bracket.

• Connect speaker wires
Use 14–16-gauge speaker wire to connect your AV receiver to the included Phoenix connector.

• Insert connector
Plug the wired connector into the back of the SBR1.2.

• Power on your system
Turn on your AV receiver or amplifier.

• Configure your receiver
Set up a 3-channel (LCR) or surround system and ensure the center channel is enabled.

Overview

Thank you for purchasing the ELURA SBR1.2 Passive Soundbar. This high-performance LCR (left, center, right) speaker is designed to deliver clear dialogue, balanced sound, and detailed audio for movies, TV, and music.

The slim, low-profile design allows for flexible placement—on a TV stand, mounted to a wall, or attached to a compatible TV bracket—making it easy to integrate into a wide range of home theater setups.

By combining left, center, and right channels into a single enclosure, the SBR1.2 simplifies installation while maintaining accurate sound reproduction. Premium components, including Air Motion Transformer (AMT) tweeters and precision-tuned woofers, provide detailed high frequencies and natural midrange performance.

Features

- Replaces left, center, and right channel speakers in a single unit
- Flexible placement: stand, wall-mounted, or TV-mounted
- Slim, low-profile design for modern flat-panel TVs
- Matte Black finish
- Removable magnetic grille
- Air Motion Transformer (AMT) tweeters for detailed high frequencies
- Four 4" woofers
- Three 40 mm AMT tweeters
- Compatible with most AV receivers (40–100W per channel)
- Phoenix connector for simplified wiring
- Rear-mounted M5 inserts for mounting compatibility
- Dims: 5.2" H × 55.98" W × 2.8" D

Contents

- ELURA SBR1.2 Soundbar
- Removable Phoenix Connector Plug
- Owner's Manual

Note: Mounting hardware is not included. Select mounting hardware appropriate for your installation surface.

Before You Begin

- Read all instructions before installation
- Ensure power is turned off before making connections
- Avoid installing near electrical wiring, plumbing, or HVAC components
- Use appropriate tools and mounting hardware

If you are unsure about installation, consult a professional installer.

Improper installation may result in damage to equipment or injury.


Speaker Placement

The ELURA SBR1.2 is designed for flexible placement:

On a TV Stand (Most Common)


Place the SBR1.2 below the TV on a flat surface.


For best performance, position it near the front edge of the cabinet to reduce sound reflections.



Wall Mounting

• The SBR1.2 can be mounted above or below the TV using compatible brackets.
• The rear panel includes two M5 threaded inserts spaced 24" (610 mm) apart.
• Compatible with many third-party soundbar mounts designed for similar spacing.
• Ensure mounting hardware is appropriate for the wall type and weight of the SBR1.2.

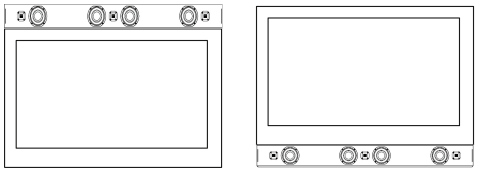



Connections


Connect the soundbar to an AV receiver or amplifier using 14–16 gauge stranded speaker wire.

Wiring Instructions

1.Remove the Phoenix connector from the rear of the SBR1.2
2.Strip approximately 1/4" (6 mm) of insulation from each wire
3.Identify polarity:
    oPositive (+)
    oNegative (–)
4.Insert wires into the connector terminals:
    oLeft (L)
    oCenter (C)
    oRight (R)
5.Tighten screws securely
6.Ensure no loose strands are exposed
7.Insert the connector back into the SBR1.2

Important Notes

• Each channel requires its own pair of wires
• Match polarity (+ to +, – to –) for each channel
• Incorrect wiring may result in poor sound performance or damage

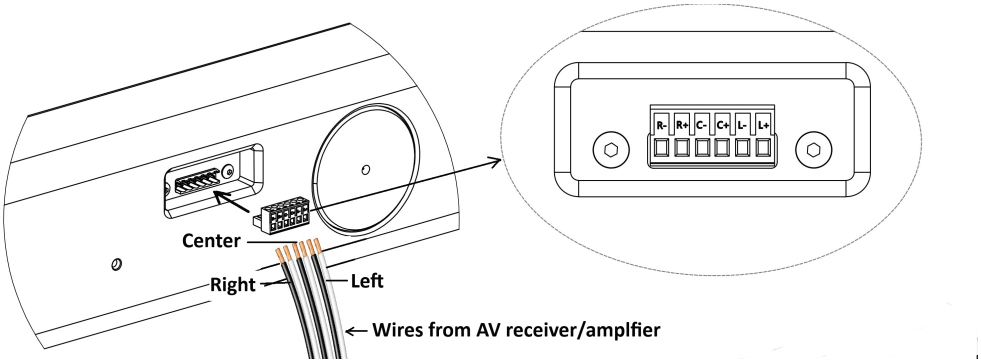

Troubleshooting

No Sound
• Confirm the amplifier is powered on
• Check all connections
• Verify the SBR1.2 is properly connected

Missing Channel (L, C, or R)
• Check wiring for that channel
• Confirm receiver settings are correct

Center Channel Not Working
• Ensure the receiver is set to a multi-channel mode
• Verify the center channel is enabled in settings

Distorted or Low Sound
• Confirm amplifier output is within 20–100W per channel
• Check wiring for loose connections or shorts

Still Not Working?
Swap channels at the amplifier to isolate the issue.

If the problem persists, contact your dealer or a qualified service professional.

Care and Maintenance

The enclosure features a durable black matte finish.

To clean:
• Use a soft, dry cloth
• Remove dust and fingerprints gently

Do not use:
• Solvents
• Harsh chemicals
• Abrasive cleaners

These may damage the finish.

Specifications

	ELURA SBR1.2
Description of the product	4” 2-way, Red Label LCR Passive Soundbar
Enclosure material & finish	MDF P2 with Matte Black Finish
Tweeter type & size	Air Motion Transformer, 40mm
Tweeter material	Kapton
Tweeter magnet material	Neodymium
Woofer size	4 inch
Woofer cone material	PP+Mica
Woofer surround material	Rubber
Woofer voice-coil size	ø25.5
Woofer magnet weight	430g
Frequency response	45Hz-20KHz ± 3dB
Crossover frequency	2.7KHz
Rated Impedance	L & R: 8 Ohms, Center: 6 Ohms
Recommended amplifier power	40W-100 watts max
Sensitivity level (efficiency, 2.83V@1M)	89dB
Input terminals	6 pin phoenix
Grille	Magnetic, Steel Grille
Mounting bracket style	Table Top or On Wall
Dimensions	5.2” H x 55.98” W x 2.8” D
Net Weight	25.35 lb (11.5 kg)
Gross Weight	31.96 lb (14.5 kg)

www.elura.com

MSTR

Product Warranty

The seller warrants the SBR1.2 free from defects in the material and workmanship for 5 years from the date of purchase from the seller or authorized dealer. Should this product fail to be in good working order within the warranty period, the seller, at its option repair or replace the unit, provided that the unit has not been subjected to accident, disaster, abuse, or any unauthorized modification. This warranty is offered by the seller for its buyer with direct transaction only. This warranty does not apply to products that have been abused, incorrectly installed, modified, disassembled and/or repaired by anyone other than Elura or our appointed repair facility.

A unit that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 90 days from the day of reshipment to the buyer. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number. The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty, all of which are expressly disclaimed. Proof of sale may be required in order to claim warranty.

The content of this manual has been carefully checked and is believed to be accurate. However, the seller assumes no responsibility for any inaccuracies that may be contained in this manual. Also, the technical information contained herin regarding the SBR1.2 features and specifications are subject to change without further notice.

www.elura.com

MSTR