

WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing handing fixture.

NOTICE: Green ground screw provided in proper location. Do not relocate.

NOTICE: Minimum 90°C supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for Dry or Damp location.

General Wiring Diagram



Installation Instruction

PREPARING THE FIXTURE FOR INSTALLATION

1. Place your thumbs against lens front side while using other fingers to pry the U-shaped edge and gently pull the lens away from the fixture. See Fig. 1.

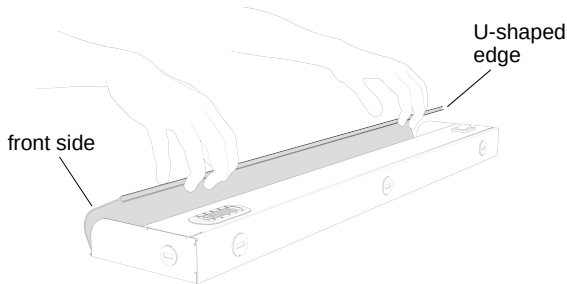


Fig.1

2. Place your thumbs against fixture back while using other fingers to press on the vertical face of the wireway cover as shown to remove it away from the tabs on housing. See fig 2.


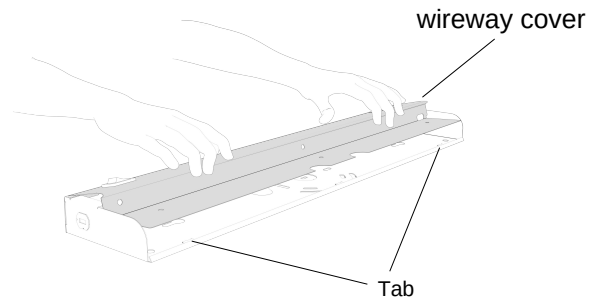



Fig.2

INSTALLATION OF FIXTURE DIRECT-WIRE METHOD


1. Remove the knock-out which is nearest the location of incoming power wires.

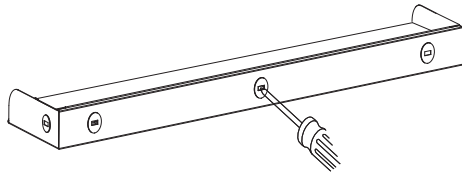


2. Mount and secure the romex strain relief to the fixture housing. Leave strain relief screws loose.

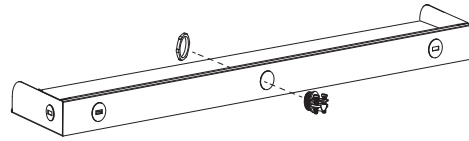


3. Secure fixture on the desired location using adequate screws.

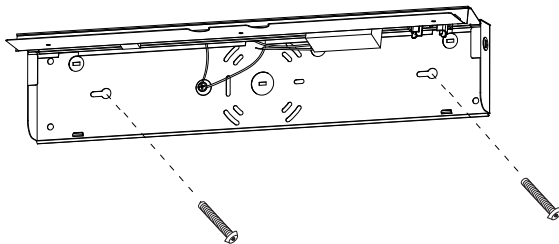

4. Make wiring connection according with wiring diagram.

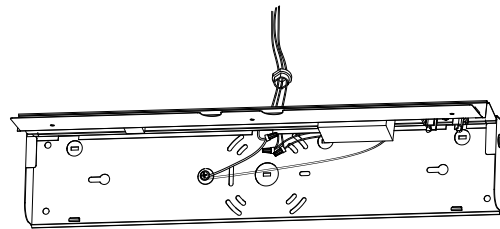

5. Reinstall the wireway cover: First, snap the two corner tabs of the wireway cover into the side slots of the fixture housing. Then press on the vertical surface of the wireway cover to hook its front edge onto the housing tabs.

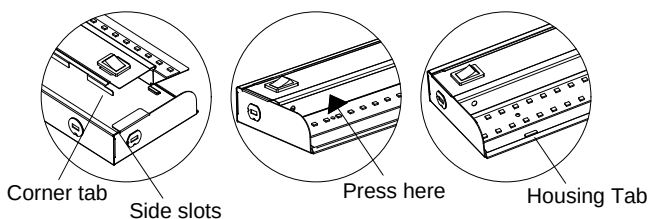

6. Reattach lens and remove lens's protective film. Turn on the light and select desired light color.

