




T-TWAV-60W-PSR

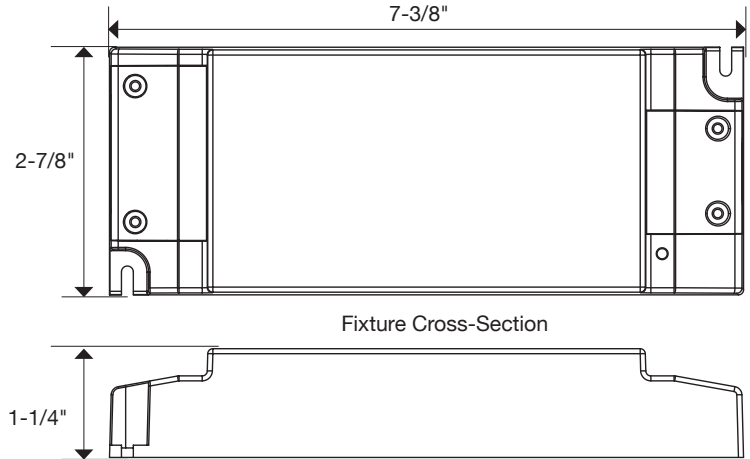

## WAV SMART RECEIVER / POWER SUPPLY

PART NUMBER	DESCRIPTION / OUTPUT	DIMENSIONS	AC CORD LENGTH
T-TWAV-60W-PSR	WAV 60 watt all-in-one smart LED receiver and power supply. Allows you to use a wireless controller, a smart phone app, or voice control with a smart home hub to control lights. Use with TandemLED smart controller (T-T-1Z-WC-RF-Color) for tunable white light control. Also compatible with the UNO 1-Zone LED controller (T-Q-1Z-WC-RF-Color), DUO 2-Zone LED controller (T-Q-2Z-WC-RF-Color), and the Quattro 4-Zone LED controller (T-Q-4Z-WC-RF-Color) for single color control.	7-3/8" x 2-7/8" x 1-1/4" 186.6 mm x 73 mm x 32 mm	3-1/4" 1000 mm

### FEATURES

- Smart Receiver and Power Supply all-in-one for less components to install
- Turns lighting into smart home compatible\*
- Compatible with single white lighting and tunable white lighting
- Dims on 12 volt side
- 3-year limited warranty
- Designed for indoor application
- Use with TandemLED Wireless Controller for wireless tunable white lighting control
- Use with Uno, Duo, or Quattro Wireless Controller for wireless lighting control

### INSTALLATION LOCATIONS

- Above Cabinet / Open Soffits
- Interior Wall Cabinet
- Base Cabinets
- Open Covers
- Any Available & Accessible Outlets

**DO NOT INSTALL IN AN ATTIC**

### TECHNICAL INFORMATION

<b>Series</b>	WAV Smart Control™ Series
<b>Input Voltage</b>	100 - 240 volt AC
<b>Output Voltage</b>	12 volt DC
<b>Output Wattage</b>	60 watts
<b>Dimmable</b>	By using wireless controller or smartphone app
<b>IP Rating</b>	20
<b>Rating</b>	cULus Recognized
<b>Rated Life</b>	30,000 hours
<b>Mounting</b>	Screw holes located on opposite corners of receiver
<b>Wiring</b>	20/2 stranded or 20/2 solid
<b>Operating Temperature</b>	-4°F to 113°F (-20°C to 45°C)
<b>Environment</b>	Dry location
<b>Construction Material</b>	PC plastic
<b>Warranty</b>	3 years

\*Compatible with Zigbee-enabled smart home hub products available from several manufacturers