

Unpacking.

Carefully remove your new Elura speaker from the box. Inspect the speaker for transit damage. If you discover damage, contact your dealer immediately. Save your carton – it is the best possible protection for your speaker should you ever have a need to move it.


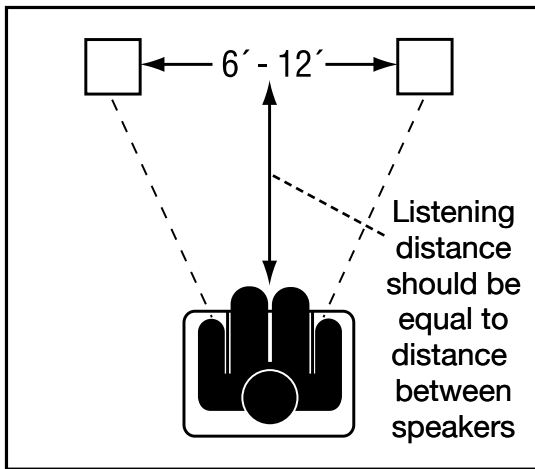


Fig. 1 Stereo Speaker Placement

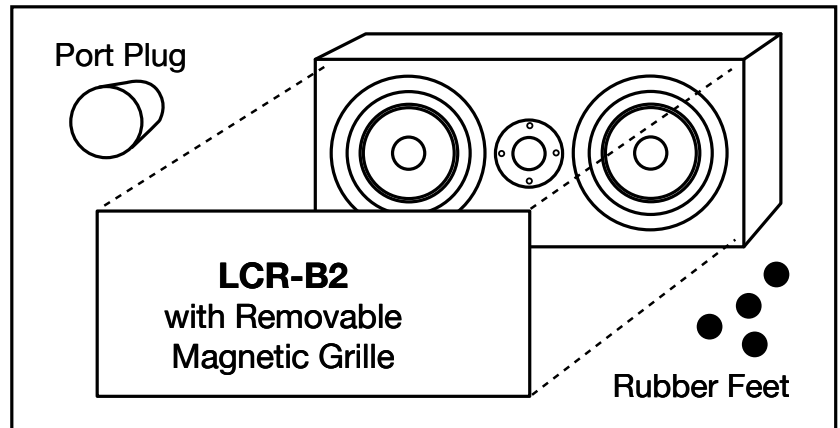

What's Included in the Box

Speaker Placement.

Traditional Stereo Placement (See Fig. 1)

Place two speakers approximately 6-12 feet apart (room dependent) and as close as possible to ear height.

Home Theater Placement (See Fig. 2)

Place left/right speakers on either side of the video screen (TV) approximately 6-12 feet apart. They can be on a console or stands. Place the center channel speaker centered above or below the video screen.

If you place the speaker on a console or tabletop we recommend using the 4 rubber feet (included) to minimize vibration and speaker movement. Also, if you locate the speaker inside a console that may impede airflow from the rear you may want to install the foam port plug into the rear port opening.

For surround speaker placement, see Fig. 2 for optional left/right surround and left/right surround back. **Note:** Side surround speakers should be directly to the sides of the listening position and about 2-3 feet above the seated listener's ear level. Surround back speakers should be approximately 2-3 feet above the seated listener's ear level, but slightly off center and as far as the corners.

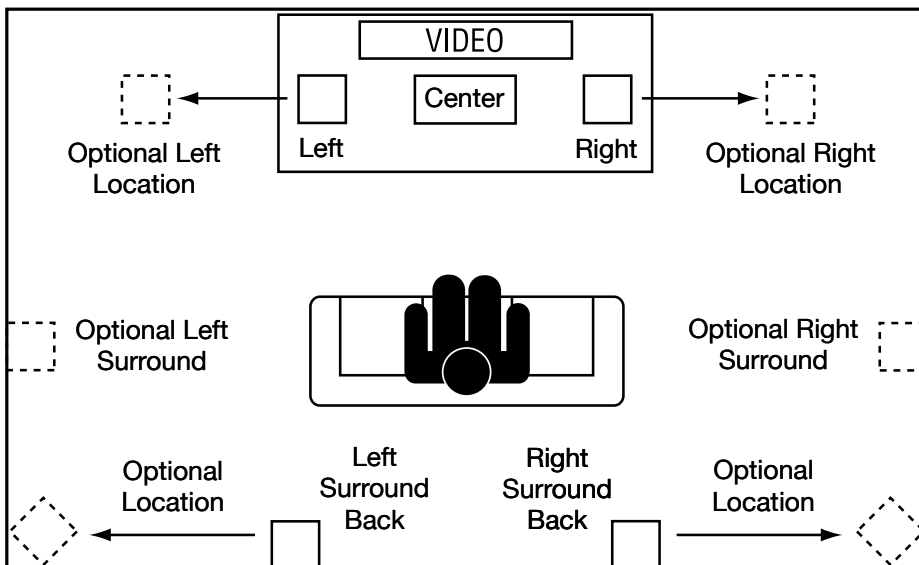



Fig. 2 Home Theater Console or Stand Placement

model # LCR-B2
red label series
LCR Speaker System

ELURA

Fig. 3

Correct
In-Phase
Hook-up

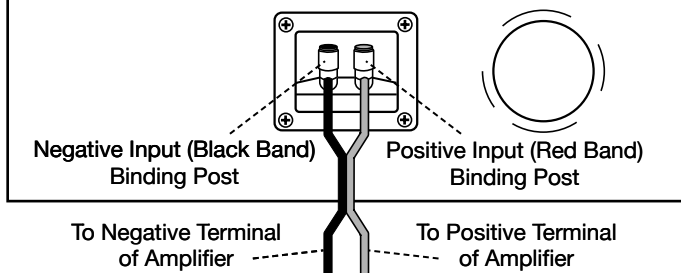

Hooking Up Your Elura Speakers (See Fig. 3).

STOP! – Make sure to consult your amplifier's owner's manual regarding speaker hook-up. Your amplifier should be turned off throughout this procedure.

Most speaker wire is polarity coded. This means that each conductor is labeled either (+) positive or (-) negative. The (+) positive side may be a different color or texture than the (-) negative side. On the back of your amplifier, each channel should be labeled (+) and (-) as well as color coded red for (+) positive and black for (-) negative. Elura speaker terminals are color coded red for (+) positive and black for (-) negative. Be sure to hook (+) to (+), (red to red), and (-) to (-), (black to black). (See Fig. 4.) All connections should be tight. Inspect connections for frays and stray strands of wire touching both (+) and (-) terminals. (This will cause a short and, perhaps, damage your equipment.)

Removing and Reinstalling the Grille.

The grille is held by magnets. To remove the grille, pull gently around the edge away from the speaker. To reinstall, align the grille with the enclosure and push into place.

Care of Your Speaker.

You can clean your cabinet using a soft, lint-free cloth, slightly moistened with plain water. Do not use any other cleaning agents or chemicals. Be careful not to get any water on the driver cones or tweeter dome. You can clean the grille with a quick pass from a vacuum cleaner with a brush attachment.

Avoid placing your speaker in direct sunlight or near a source of heat that may, over time, damage the finish.

Troubleshooting & Service.

If you should have a problem, first try to determine if it is indeed a speaker problem. Determine whether the problem exists in both speakers. If it does, the problem most likely originates in some other components in the system. If the problem is in one speaker only, reverse your speakerleads (left to right, right to left). If the problem moves to the other speaker, your problem is not in the speakers. Once you have determined that you have a speaker problem, contact your dealer for authorized factory service information. If you are unable to contact your dealer, if your dealer is unable to solve your problem, or if you have any questions or comments regarding your speaker system, please contact us.

LCR-B2 Specifications.

System Design: High-density MDF, 2-way, 3-element, vented enclosure. Ideal for center, left, right, or surround applications. Horizontal or vertical orientation.

Tweeter: 1" (25mm) ultra-wide dispersion soft dome with neo magnet

Woofers: 2 - 5 1/4" (133mm) polypropylene mica-filled cones w/NBR rubber surrounds

Frequency Response: 65 Hz-23,000 Hz

Impedance: 6 ohms nominal

Recommended Amplifier: 10 - 150 watts

Sensitivity: 86 dB

Speaker Dimensions: 7" H x 16 1/2" W x 7 7/8" (180mm H x 420mm W x 200mm D)

Weight Each: 14.3 lbs. (6.5 kg)

Warranty.

This Elura product comes with a 2 year warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified or disassembled.

A speaker that falls under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for five years from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number. The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed. Proof of sale may be required in order to claim warranty.

www.elura.audio

MSTR
BRAND
PRODUCTS