

# versa

## Mini PIR Dual

HONEYWELL

2GIG

QOLSYS | INTERLOGIX



PIR Motion Sensor

844.20.VERSA  
VERSAWIRELESS.COM

The Versa PIR Dual is a motion sensor designed to detect both movement and temperature changes for all major wireless security systems, sending an encrypted signal out when a variation is detected.

For optimal efficiency, sensor comes with built-in pet immunity.

**Security that's always in style.**

## Multi-Protocol

Compatible With All Major Wireless Security Systems


## Pet Friendly

Adjustable Setting For Pet Immunity  
Up To 60 lbs

## Stylish Security

Perfect For Front Doors, Window Frames, Walking Paths & More!

Works With All Major Wireless Security Systems!

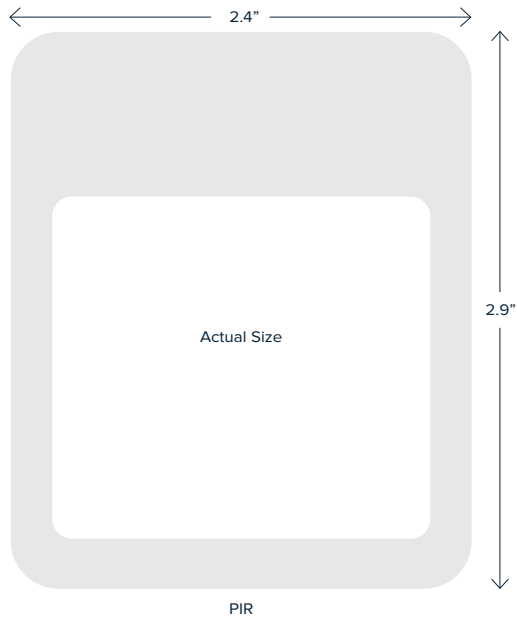

## Specifications

<b>Battery</b>	1 CR123 lithium battery (replacable)
<b>Battery Life</b>	3+ years (typical)
<b>Ir Sensor</b>	Dual elements
<b>Sensitivity</b>	Selectable: 2-event or 3-event
<b>Events Detection</b>	HighBar™ false alarm rejection processor
<b>Housing Material</b>	High-impact ABS
<b>Rf Immunity</b>	20 V/m, 10-1000 MHz; 10 V/m, 1-2
<b>Tamper</b>	Sealed dome contact
<b>Operating Temperature</b>	-40°F (-40°C) - 131°F (55°C)
<b>Regulatory Approvals</b>	Pending
<b>Power Supply Current</b>	22uA (no alarm) GHz
<b>White Light Immunity</b>	6500 lux
<b>Installation</b>	MB-100 bracket
<b>Sensor Dimension (w x h x d)</b>	2.4" x 2.9" x 1.7"
<b>Pet Immunity</b>	60 lbs



Specifications subject to change without notice. ©2020 Versa Wireless Inc. All rights reserved. US & International Patents Pending.