

## PrimeChime<sup>+</sup>2 Electronic Doorbell Kit (PRCP2)



### Accessories

Deco and Stucco Buttons Available



White Nickel Copper Black



Antique Brass Architectural Bronze Polished Brass



Nickel White

### 📍 Location

- Front Door
- Rear Door
- Gated Entry
- Residential
- Commercial

### ★ Product Edge

- Compatible with Ring
- Installs Directly into Dual Voltage Box
- Daisy Chain
- Paintable Faceplate
- Front and Rear Chimes
- Durable, UV + Dust Resistant Buttons

### + Options

- Deco Buttons: White, Nickel, Copper and Black options
- Stucco Buttons: Architectural Bronze, Antique Brass, Polished Brass, Nickel, and White options


# The Same Doorbell You Love with the Added Security You Need

The **PrimeChime® Plus2** keeps all the popular features of NICOR's PrimeChime Plus® electronic doorbell and now adds compatibility with most video doorbell buttons. The PRCP2 combines both line voltage and low voltage into a single unit and offers a paintable, screwless faceplate for simple installation and a seamless look. Separate ring tones for front and rear doors allows you to keep track of exactly which door to answer. NICOR's lighted button makes your doorbell easily visible to visitors at all times of day, welcoming them to your home.



x2

**FRONT DOOR**  
"WESTMINSTER"  
**REAR DOOR**  
"DING-DONG"

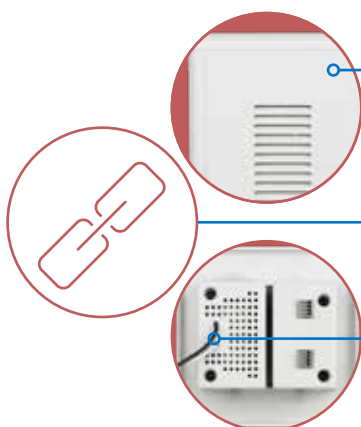

### Screwless Faceplate


Easier installation and more modern look with a paintable faceplate

### Daisy Chain

Chain up to 2 PrimeChime® Plus units within 200ft

### Integrated Transformer

Line and low voltage in the same unit

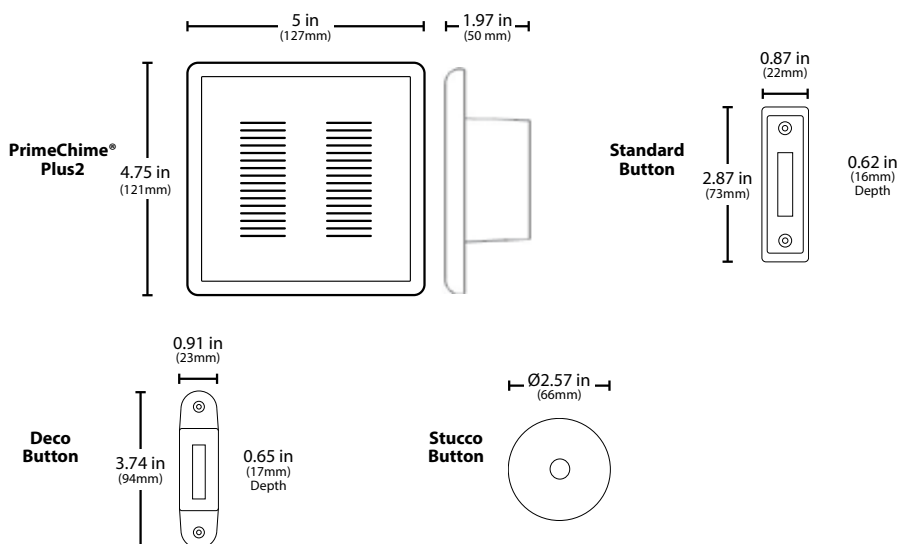

## Features

### Construction

- ABS Housing
- Combines line voltage and low voltage in a single unit
- Screwless ABS Faceplate
- Two-wire pigtail for line voltage input
- Multiple poke-in connectors for low voltage output for front and rear doorbells

### Electrical

- Integrated transformer
- Input: 120VAC/60Hz
- Output: 20VAC
- Digital control board with speaker
- Two distinct chime tones: Westminster for front and Ding-Dong for rear door.

### Finish

- Matte White
- Faceplate is field paintable

### Installation

- Includes two lighted rectangle doorbell buttons
- Compatible with many popular video doorbell buttons (see compatibility list and/or test for compatibility before installation)
- Installs quickly into a standard two-gang dual-voltage wall box
- Daisy chain up to two PrimeChime® Plus2 units (max 200ft total wire length)
- Doorbell buttons connect with 18ga-22ga wire (max 200ft total wire length)

### Warranty

- 1 year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

### Recommended Video Doorbell\*\*

Manufacturer	Model
Ring	Video Doorbell   1, 2, 3, 3 Plus
	Video Doorbell Pro
	Video Doorbell Elite
Google Nest	Hello
Skybell	Skybell HD
SimpliSafe	Video Doorbell Pro

\*\*Not a complete list. Call NICOR or test for compatibility before installation.

LIT-PRCP2-10PK  
20220803



7 67706 18350 4