

# INSTALLATION INSTRUCTIONS

Item# 14225-XXX-L

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.

2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

### ASSEMBLING THE FIXTURE (Fig.1)

3. Loosen mounting screws (E) to remove mounting plate (A) from canopy (D). Temporarily raise mounting plate (A) to ceiling. Mark location for anchors (N), use power drill to drill holes for anchors (N). Insert anchors (N) into hole and press flush with ceiling. Repeat on opposite side.

4. Attach mounting plate (A) to junction box (Not included) using outlet box screws (B) (Size: #8-32N\*L1"). The side of the mounting plate (A) marked "GND" must face out.

5. Screw anchor screws (M) through mounting plate (A) and into anchors (N) (installed in step 3).

### CONNECTING THE WIRES (Fig. 3)

6. Connect electrical wires as shown in Fig.3, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the mounting plate (A) using the green screw (C) provided.

7. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

8. Raise the canopy (D) to the ceiling. Line up the holes in canopy with holes in mounting plate (A) and secure with two mounting screws (E).

Your installation is now complete. Return power to the junction box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

**Dimmable with ELV and/or LED compatible wall dimmer switches.**

**The LED module includes 5 CCTs**

**(2700K/3000K/3500K/4000K/5000K), please select the desired color temperature before installation.**

### Replacing LED module (Fig. 2)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig. 2)

**Warning: Turn off power at the circuit breaker before replacing LED module.**

- To remove the fixture frame (H) and metal ring (I) from the fixture, loosen decorative screws (F), To remove the canopy (D) from the ceiling, loosen mounting screws (E), remove the wire connectors and place the canopy (D) on a clear flat surface. (Fig.1&Fig.2)
- Loosen screws (L) to separate lens (K) and LED module (J) from canopy.
- Reverse steps a-c for installing the new LED module (J).

Note: The LED module should be provided by a specified supplier.

Fig.1

Set#A-021-272102

-Mounting plate

-Ground Screw

-Outlet Box Screw\*2

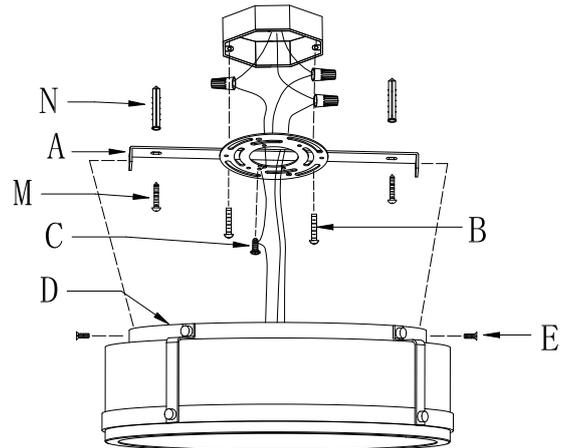


Fig.2

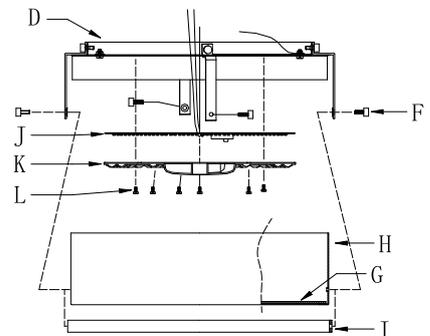


Fig. 3

FIXTURE WIRES  
Black or  
Smooth



HOUSE WIRES  
Black  
(Hot)

FIXTURE WIRES  
White or  
Ribbed



HOUSE WIRES  
White  
(Neutral)

FIXTURE WIRES  
Bare  
Copper  
(Ground)



HOUSE WIRES  
Green  
(Ground)



**Fig.4**

**a. Hardware Bag:**

- A. Mounting plate\*1
- B. Outlet Box screw\*2
- C. Ground screw\*1
- E. Mounting screw\*2
- M. Anchor screw\*2
- N. Anchor \*2

