

## Assembly & Installation Instructions

### CAUTION:

Read instructions carefully and turn electricity off at main circuit breaker panel before beginning installation.

**WARNING:** Follow the instructions carefully to assure full compliance with local, state, and NEC requirements. If there are any questions, contact a Qualified Electrical Contractor.

**WARNING:** Risk of fire or electrical shock. Install this kit only in the Recessed Cans matching the dimensions listed below.

**WARNING:** To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

**CAUTION:** Risk of fire. Consult a Qualified Electrician to ensure correct branch circuit conductor.

**NOTE:** This product is designed to operate with most standard incandescent or low voltage electronic dimmer switches. Results may vary. For recommended dimmers, consult product specification sheet for more details.

**NOTE:** SUITABLE FOR DAMP LOCATIONS. SUITABLE FOR WET LOCATIONS WITH TOP COVER "K" ASSEMBLED:  
P5642-XX USE P860046, P5642-XX30K USE P860046, P5644 USE P860047, P5675-XX USE P860045,  
P5675-XX30K USE P860045

**WARNING:** To comply with the National Electric Code and Underwriters Laboratories requirements, the edge of the wall plate coming in contact with the mounting surface, must be sealed with a latex waterproof caulking to prevent water from entering the outlet box.


**NOTE:** Always install with ambient temperatures specified on the product specification sheet. 5 year warranty with product registration. See [www.progresslighting.com](http://www.progresslighting.com) for details.

**Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**

**CAUTION:** All glass is fragile, use care when handling glass components.

1. Fasten mounting plate (A) to outlet box (B) with mounting screws (C) from outlet box (B). Thread green ground screw (D) into mounting plate (A).
2. Connect fixture wires (E) to supply wires (F) as shown on wiring diagram.
3. Slip fixture assembly (G) over mounting plate (A) and secure in place with screw(s) (H). Use wrench (J) to tighten set screw.

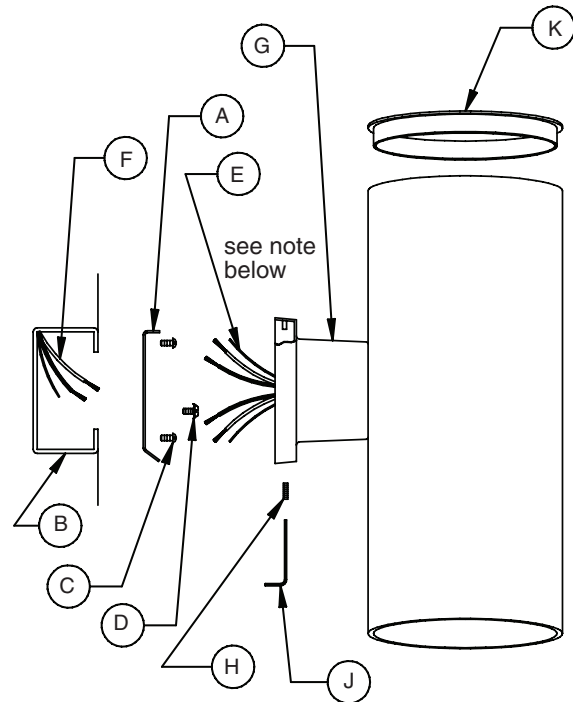

**NOTE:** On up/down models, the wiring connections can be wired together or separated and controlled by two separate switches.

