


INSTALLATION INSTRUCTIONS


WARNING

1. Risk of Fire-Supply conductors (power wires) connecting the fixture must be rated minimum 90 °C. If uncertain consult an electrician.
2. Risk of Electric Shock-Disconnect power at fuse or circuit breaker before installing or servicing.
3. Risk of Fire/Electric Shock-If not qualified, consult an electrician.

TOOLS REQUIRED

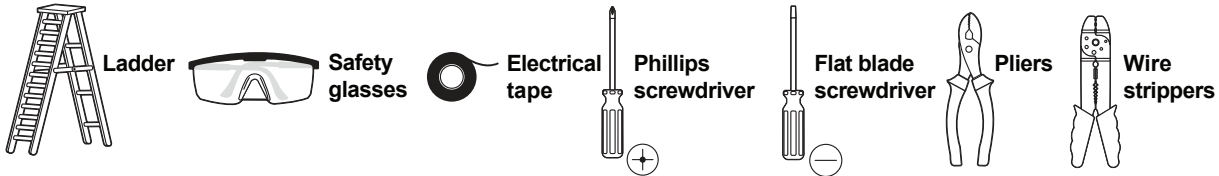

INCLUDED ACCESSORIES BAG



Wire Nut
Qty: 3 pcs
P3



Junction Box Screw
#8-32 x 1"
Qty: 2pcs

HOUSING INSTALLATION

1. Prior to installation, twist the trim off from the disk light.
2. Attach two mounted screws into outlet box leaving enough of screw exposed to engage keyholes in the top of disk light (Fig.1).
3. Provide electrical service according to the "National Electrical Code" or your local electrical code to the outlet box. (Fig.1)
4. Connect supply wires to wires on fixture with wirenuts. Connect white to white, black to black and green wire to green wire as grounding connection.
5. Select the desired Color Temperature by setting the sliding switch to the target CCT (See Fig.3).
6. Twist the trim on disk light, and lock the trim in place (See Fig.2).

VERIFIED LIST OF TESTED DIMMERS

Brand	Model No.
LUTRON	DVCL-153P-AL
	DVCL-253P-WH
	AYCL-253P-LA
	PD-6WCL-WH-R
Leviton	IPL06-10Z
	IPE04-1LZ

MAINTENANCE

- Do not modify this fixture. Any modifications may render the product unsafe and void warranty.
- This product is suitable for wet locations.

IMPORTANT!

If the control is not paired properly to LED fixtures, irreparable damage may occur.

Figure 1

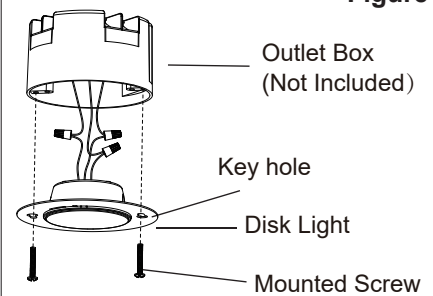


Figure 2


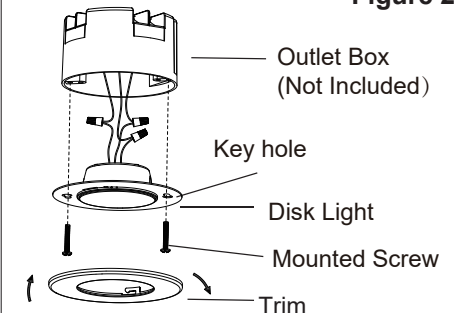


Figure 3



FCC INFORMATION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.