


**PART#: 22/4 5505**

DESCRIPTION : 4C/22AWG Solid BC ,PVC JACKET

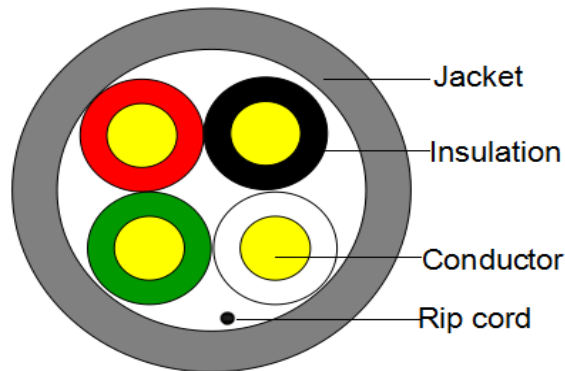

**Standard:** UL 444 & UL 13, Type (UL) CM c(UL)

EU RoHS 2011/65/EU Compliant

EN50575: 2014 REACTION TO FIRE CLASS Eca

**Construction Characteristics:**

|             |               |                             |
|-------------|---------------|-----------------------------|
| Conductor   | Material      | Solid Bare Copper           |
|             | Size          | 22AWG X 4C                  |
|             | Construction  | 1/0.64+/-0.004mm            |
| Insulation  | Material      | PVC                         |
|             | Min.Thickness | 0.18mm                      |
|             | AVG.Thickness | 0.20mm                      |
|             | Diameter      | 1.1+/-0.05mm                |
|             | Colors        | Black & Red & White & Green |
| Jacket      | Material      | PVC                         |
|             | Min.Thickness | 0.38mm                      |
|             | AVG.Thickness | 0.43mm                      |
|             | Diameter      | 3.6+/-0.20mm                |
|             | Rip Cord      | Nylon                       |
|             | Color         | White                       |
| Bend radius | Min 15D/55mm  |                             |

**Electrical & Physical Characteristics:**

|                             |                        |
|-----------------------------|------------------------|
| Conductor Resistance(22AWG) | Max 53.5ohm/km at 20°C |
| Dielectric Strength         | Min AC1.5KV            |
| Rated Voltage               | Max 80Volts            |
| Marking:                    |                        |
| Packaging:                  |                        |

| Approx.Weight    | Approx.Dimension(mm) | Package    | Packages per pallet |
|------------------|----------------------|------------|---------------------|
| 7.17kgs/15.81lbs | 280x260x280          | 1000ft/Box | 64                  |