

PSPW2RB4

CIRCUIT BREAKER & OUTLET COMBO

Enclosed Power Control Center, 4 Amp Switch / Circuit Breaker, 120 Vac, 2 Outlets, Wires



SPECIFICATIONS

Operating Temperature: -30 to 140° F

Circuit Breaker: 4 Amp Max.


Dimensions: 4.000" x 4.000" x 1.800"
(w/ .500" NPT Nipple)

Wires: 16", 600V Rated

Approvals: UL Listed, UL916, C-UL, CE

Housing Rating: Plenum, NEMA 1

Mounting: Enclosure may be mounted by using four holes in each corner on outside of enclosure (two screws provided) or by using three holes inside enclosure (screws not provided). Drill screws that create their own pilot-hole are recommended (may be ordered from Functional Devices, Inc. - see model DS80625).

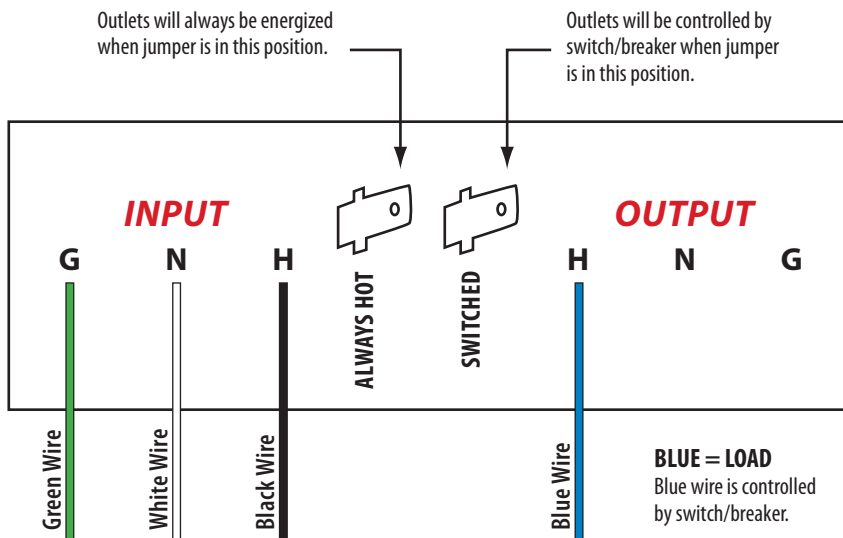

Notes:

» Indicator light will illuminate when switch/breaker is ON (RESET position) indicating power has been transferred from INPUT to OUTPUT by the switch/breaker. If it is desired for the indicator light to be illuminated continuously to indicate the presence of input (Line) power, INPUT and OUTPUT may be reversed -- connect input power from line to OUTPUT and connect output load to INPUT (operation of the jumpers above also reverses).


NOTES

CONDENSE WORK SPACE AND WIRING (POWER CONTROL)

Power Control Centers allow you to save large amounts of time, space, and wiring throughout your panel.


BEFORE

There is a lot of extra wiring in this enclosure which not only takes up space but also increases the difficulty and time associated with installation.



AFTER

By using one of Functional Devices' Power Control Centers you will greatly reduce installation time, as well as save space in your enclosure.



ENCLOSED 4 AMP

PSPT2RB4
PSPW2RB4

ENCLOSED 10 AMP

PSPT2RB10
PSPW2RB10