
ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0421

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

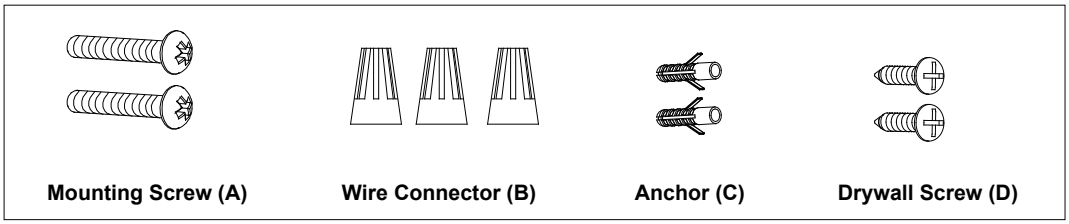

Mounting Screw (A) **Wire Connector (B)** **Anchor (C)** **Drywall Screw (D)**

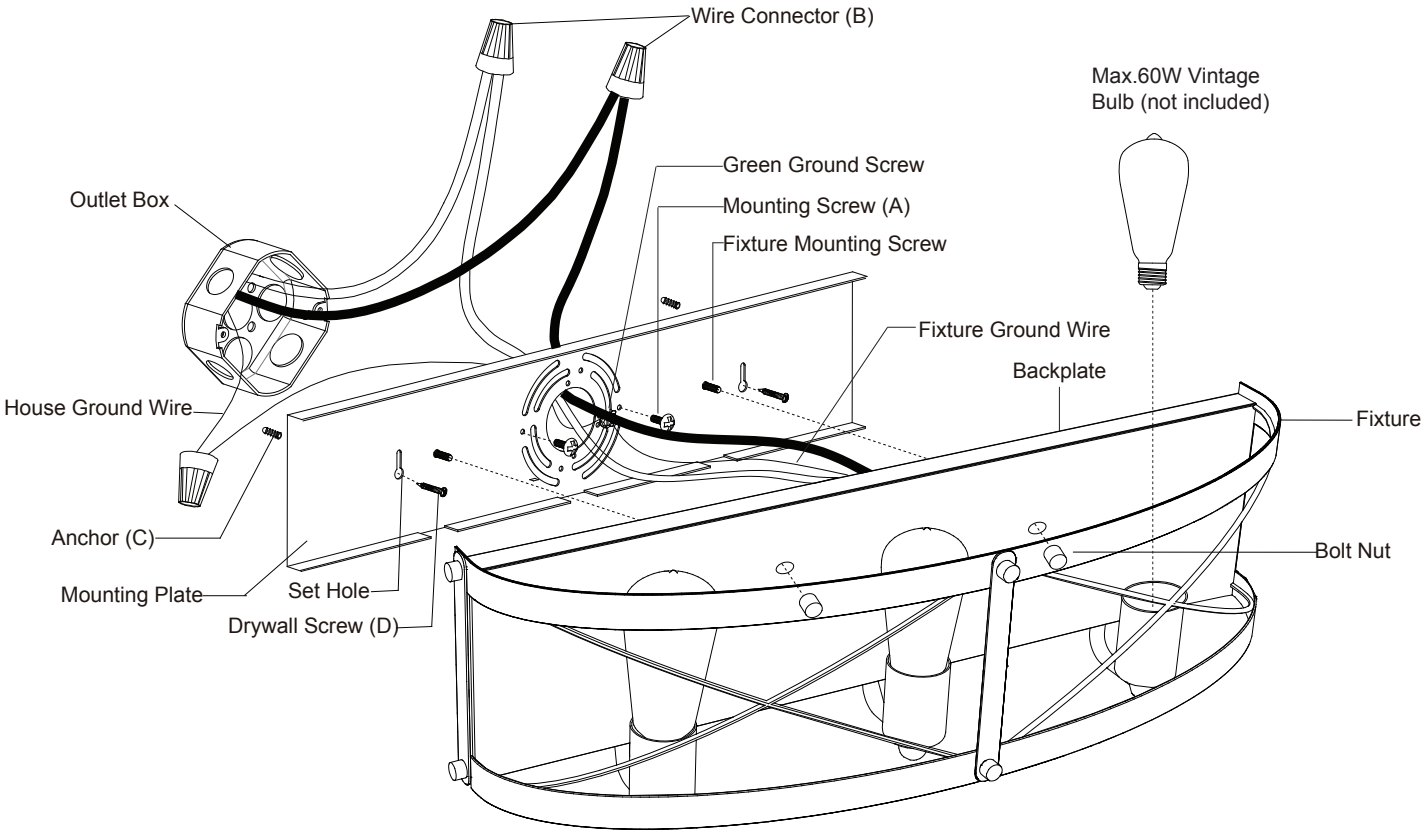


Fig.1


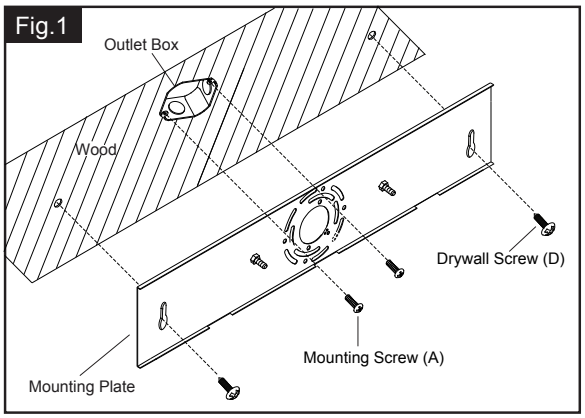


Fig.2

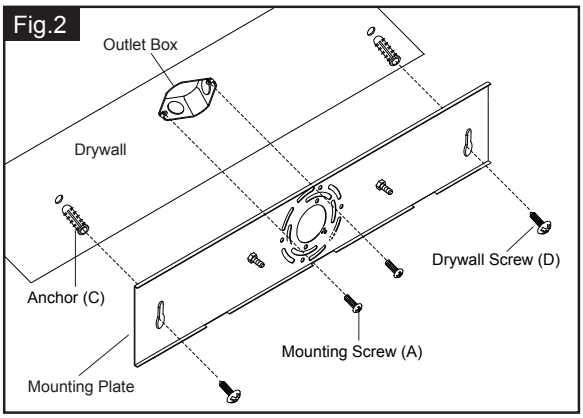

VAXCEL

220722

Installation Steps

Turn off the power at fuse or circuit box.

1. Unscrew the two bolt nuts. Remove the mounting plate from the backplate.

2a. For Mounting to Wood:
Attach the mounting plate to the outlet box by using two mounting screws (A), then secure the drywall screws (D) through the set holes to the wall. (See Fig.1)

2b. For Mounting to Drywall:
Place the mounting plate to the outlet box and mark the target on the wall from the set holes for drilling two holes, remove the mounting plate. Drill the holes and thread the anchors (C) into the holes, then attach the mounting plate to the outlet box by using two mounting screws (A). Secure the drywall screws (D) through the set holes into the anchors (C). (See Fig.2)


3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (B) as follows:
---Connect the black (hot) wire from the fixture to the black (hot) wire from the power source.
---Connect the white (neutral) wire from the fixture to the white (neutral) wire from the power source.
---Attach the fixture ground wire to the mounting plate with the green ground screw , then connect it to the house ground wire with wire connectors (B).
Carefully put the wires back into the outlet box.

4. Attach the backplate of the fixture to the mounting plate by aligning and inserting the two fixture mounting screws from the mounting plate into the open holes on the backplate, then screwing it with the two bolt nuts.

5. Install 3 X 60W medium base vintage bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.

6. This fixture can be mounted with lights pointed up or down. (See Fig.3)


Fig.3

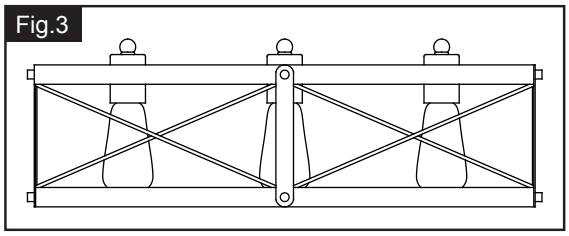


Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

Spare Parts List:

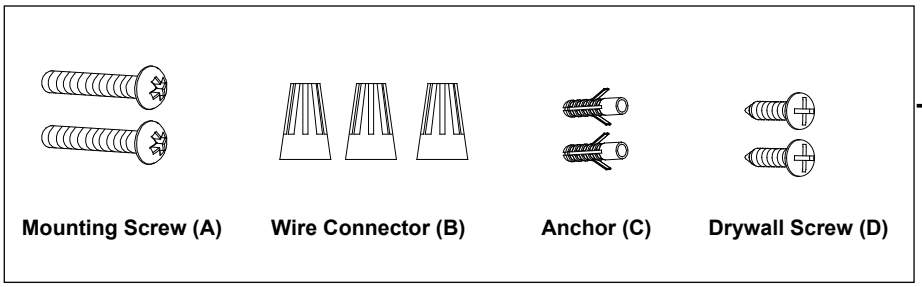

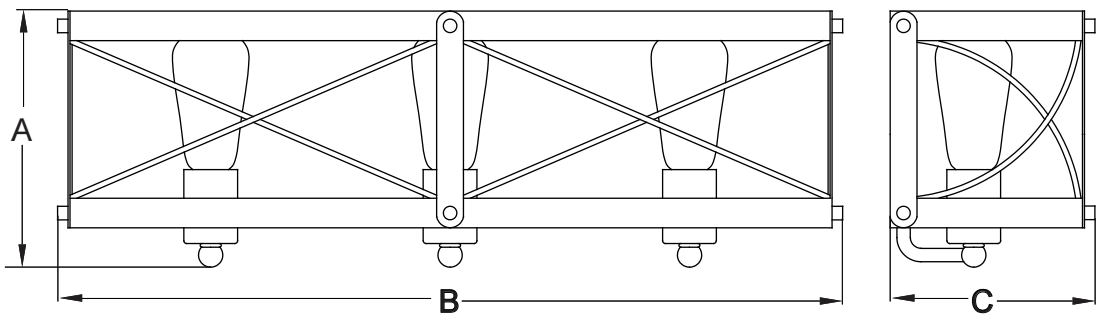

A: 7-1/2"

B: 23"

C: 6"

VAXCEL

220722