


ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0329

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included):

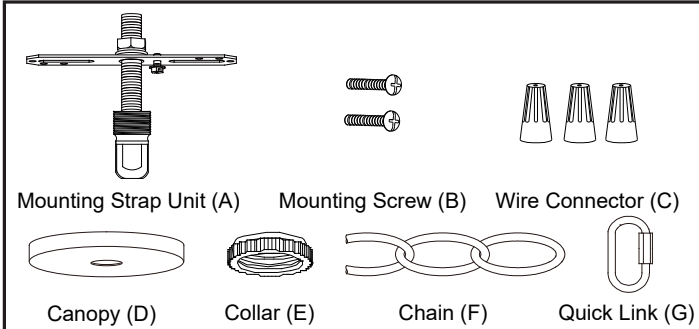

Installation Steps

Turn off the power at fuse or circuit box

1. Attach the mounting strap unit (A) to outlet box with mounting screws (B).
Note: The depth of threaded pipe on the mounting strap unit may need to be adjusted to properly fit the fixture.

2. Take a rod and hook one end onto the loop-a of the fixture and hook another end onto one loop-b of the fixture. Repeat with the other rods.

3. Choose the length of the chain (F) you need, use pliers (not included) to open and remove links to shorten the chain (F), then weave the fixture wire and the fixture ground wire through the chain (F), collar (E) and canopy (D).

4. Connect one end of the chain (F) to the loop by using a quick link (G).


5. Connect the other end of the chain (F) to the top loop on the mounting strap unit (A) by using another quick link (G). Thread the fixture wires and fixture ground wire through the center of the mounting strap unit (A).

6. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:

- Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
 - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire to the mounting strap unit (A) with the green ground screw, then connect it to the house ground wire with a wire connector (C).
- Carefully put the wires back into the outlet box.

7. Attach the canopy (D) to the mounting strap unit (A), then secure it by tightening the collar (E).

8. Attach the candle tubes to the sockets.

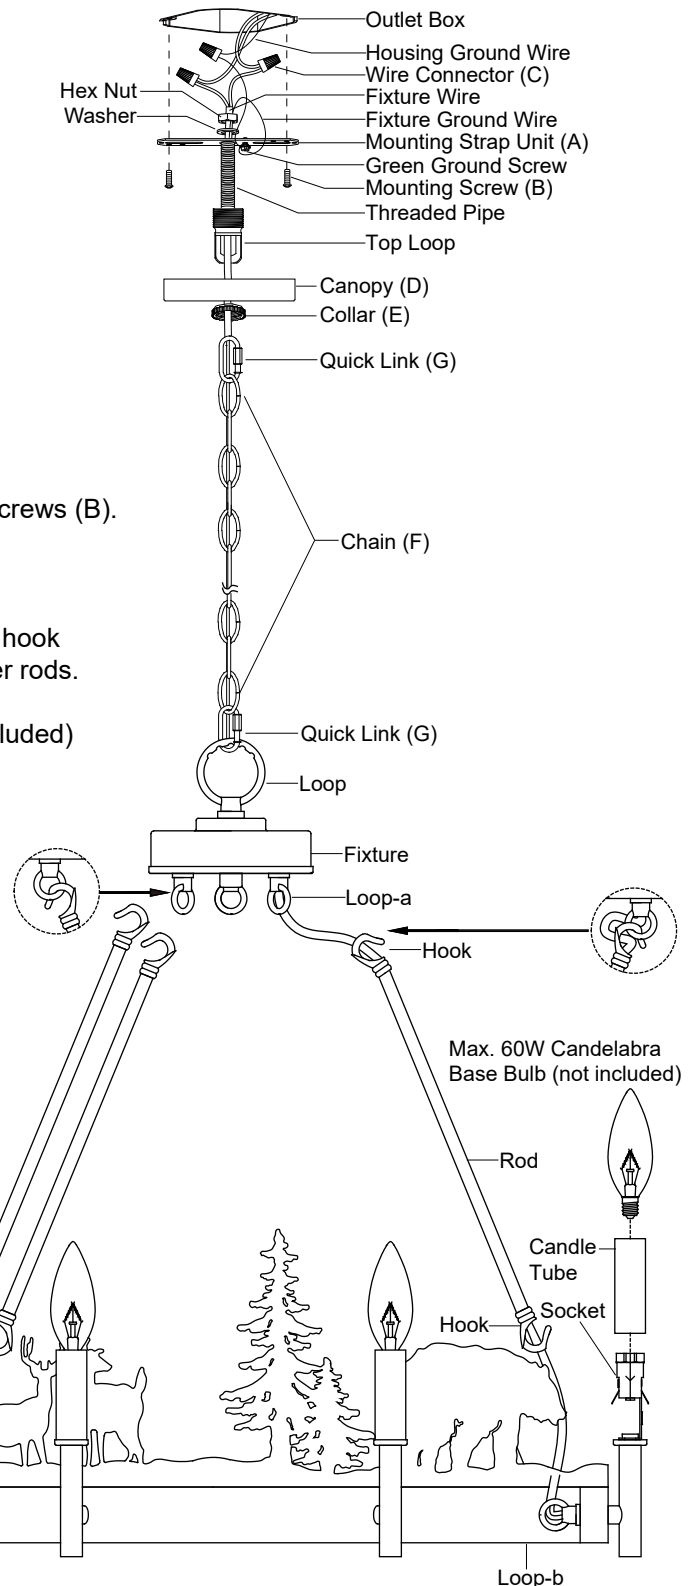

VAXCEL


260604

9. Install 6 x 60W max. candelabra base bulbs (not included).


See relamping label at socket area or packaging for maximum wattage allowed.

10. Angled mounting recommended for a vaulted or angled ceiling (Fig.A).

Turn off the power at fuse or circuit box

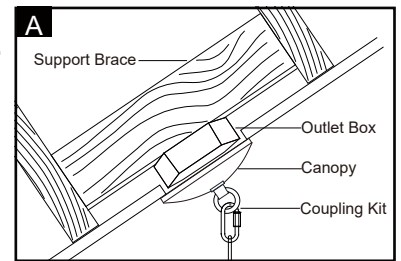

Selecting Main Light or Night Light Mode

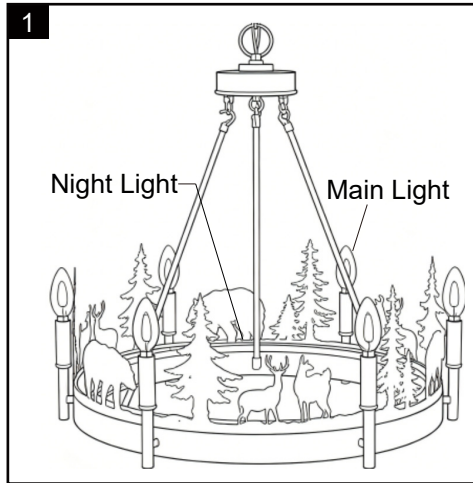

1. The fixture has three fixed sequential modes:

Mode 1 (light bulbs only), Mode 2 (LED night light only) and Mode 3 (both light bulbs and the LED night light turn on simultaneously)

a. Flip the wall switch ON after installation to enter Mode 1 (light bulbs only).

b. Flip the wall switch OFF and back ON in less than 3 seconds to enter the Mode 2 (LED night light only).

c. Flip the wall switch OFF and back ON again in less than 3 seconds to enter Mode 3 (both light bulbs and LED night light)


This fixture is dimmable with a forward phase electronic dimmer. Dimmers tested to be compatible with this Fixture are the Lutron: SCL-153P, LECL-153P, DVCL-153P.

If you are unfamiliar with electrical installation, it is recommended to use a qualified electrician for your installation(s).


NOTE: If the fixture is turned off for more than 6 seconds, the mode will automatically revert to the default Mode 1 (light bulbs only).

The following parts are available for reorder if damaged or missing.

Spare Parts List:

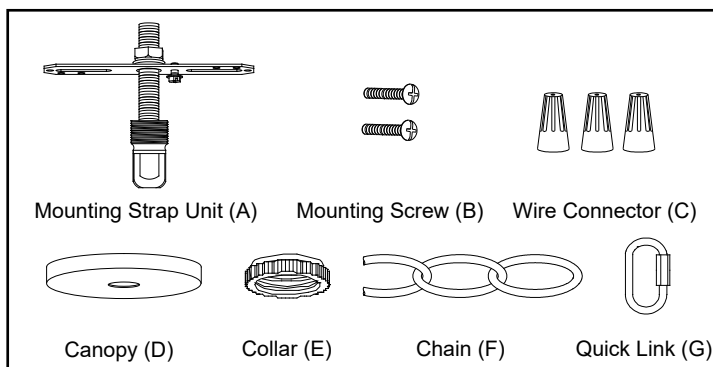

→
Mounting Hardware
7186MM (1SET)

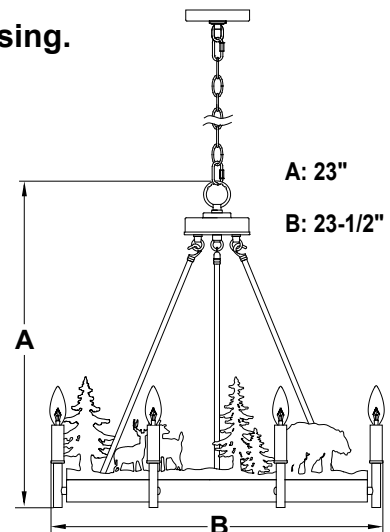

5 Year Limited Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

In addition:

- Any product with an integrated motion sensor or dusk-to-dawn photocell is supported by a 5-year warranty for the functionality of the product.
- Any product with integrated LED modules is covered by a 5-year warranty on the LED functionality.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?

info@vaxcel.com
1-800-482-9235