
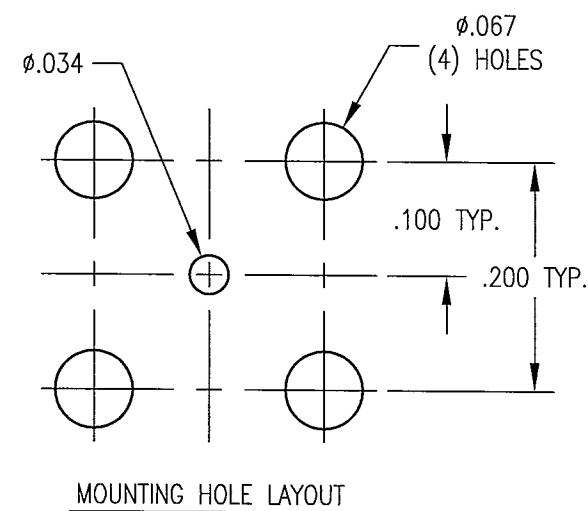
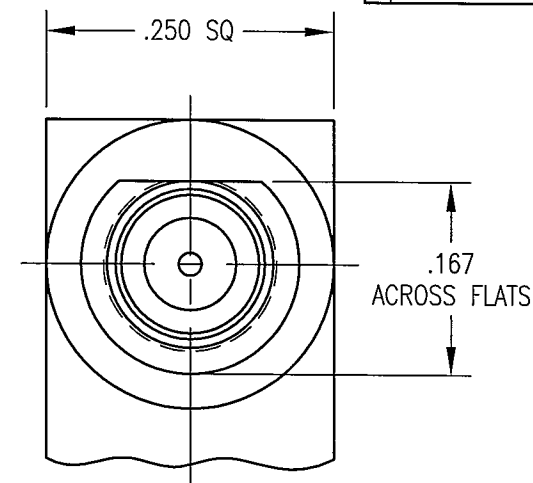
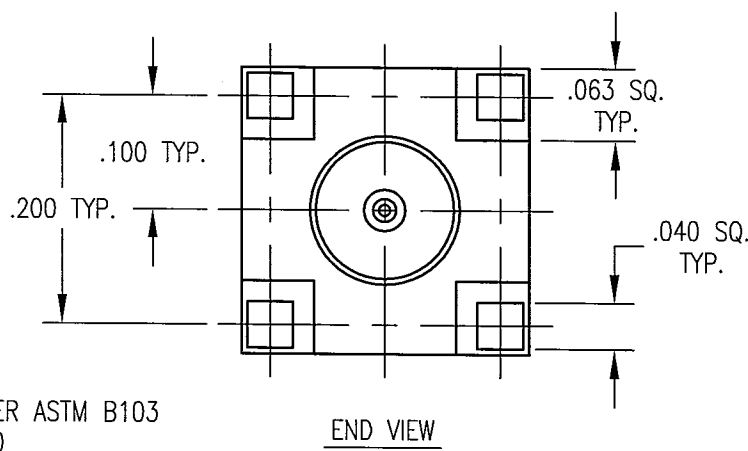


DWG. NO.		573-080-6043H	
REV	DESCRIPTION	BY DATE	APPD
B	ECR 7161	12/18/01	KJT

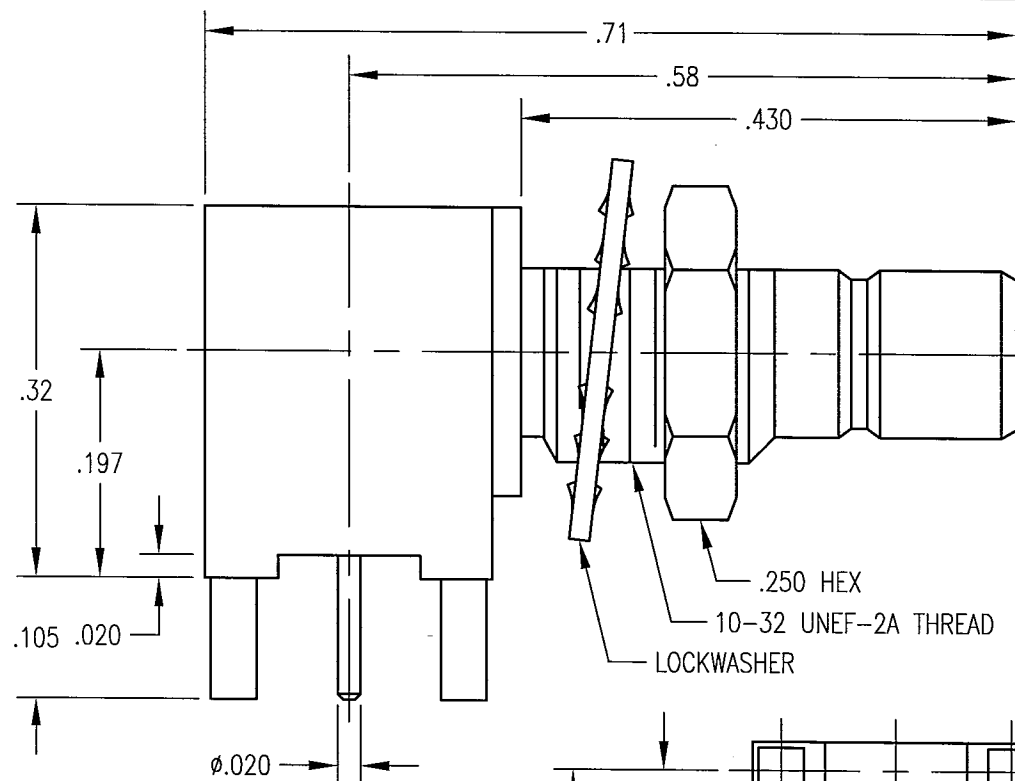

NOTES:

1. MATERIALS:

CENTER CONTACT: COPPER ALLOY
 LOCKWASHER: PHOSPHOR BRONZE PER ASTM B103
 INSULATOR: TEFLON PER ASTM D1710
 ALL OTHER METAL PARTS: BRASS PER ASTM B16

2. FINISH:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 NUT & LOCKWASHER: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

3. IMPEDANCE: 75 OHMS NOMINAL

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMALS .XX ± .01/0.254 .XXX ± .005/0.127 ANGLES ± 2° SCALE: 6:1				Littion Winchester/Retconn 400 Park Road Watertown, Connecticut 06795			
CUSTOMER DRAWING				TITLE 75 OHM MINI-SMB BULKHEAD PC MOUNT JACK			
DRAWN KJT	DATE 05/22/00	CHECKED JH	DATE 5/22/00	A 573-080-6043H			
APPROVED JMC	DATE 5/22/00	APPROVED JED	DATE 5/22/00	SHT. OF 1 1	REV. B		