

# CyberPower

## UT750G BATTERY BACKUP

Protect desktop computers, workstations, networking devices, and home entertainment systems


A compact UPS with line interactive topology, the CyberPower UT750G provides battery backup (using simulated sine wave output) and surge protection for desktop computers, workstations, networking devices, and home entertainment systems. The UT750G uses Automatic Voltage Regulation (AVR) to correct minor power fluctuations without switching to battery power, which extends battery life. AVR is essential in areas where power fluctuations occur frequently. The UT750G comes with a two-year warranty.

### TYPICAL APPLICATIONS

- Desktop Computers
- Automatic Voltage Regulation
- Workstations
- Home Theater Equipment
- Personal Electronics
- Home Networking
- Routers & Modems
- Voice Over Internet Protocol (VoIP) Phone Systems

### FEATURES

- Capacity: 750 VA / 375 W
- Topology: Line Interactive
- Waveform: Simulated Sine Wave
- Output: 120 VAC +/- 10%
- Outlets: 8 (4 surge, 4 surge + battery backup)
- Outlet types: 8 x NEMA 5-15R
- Warranty: 2-year limited

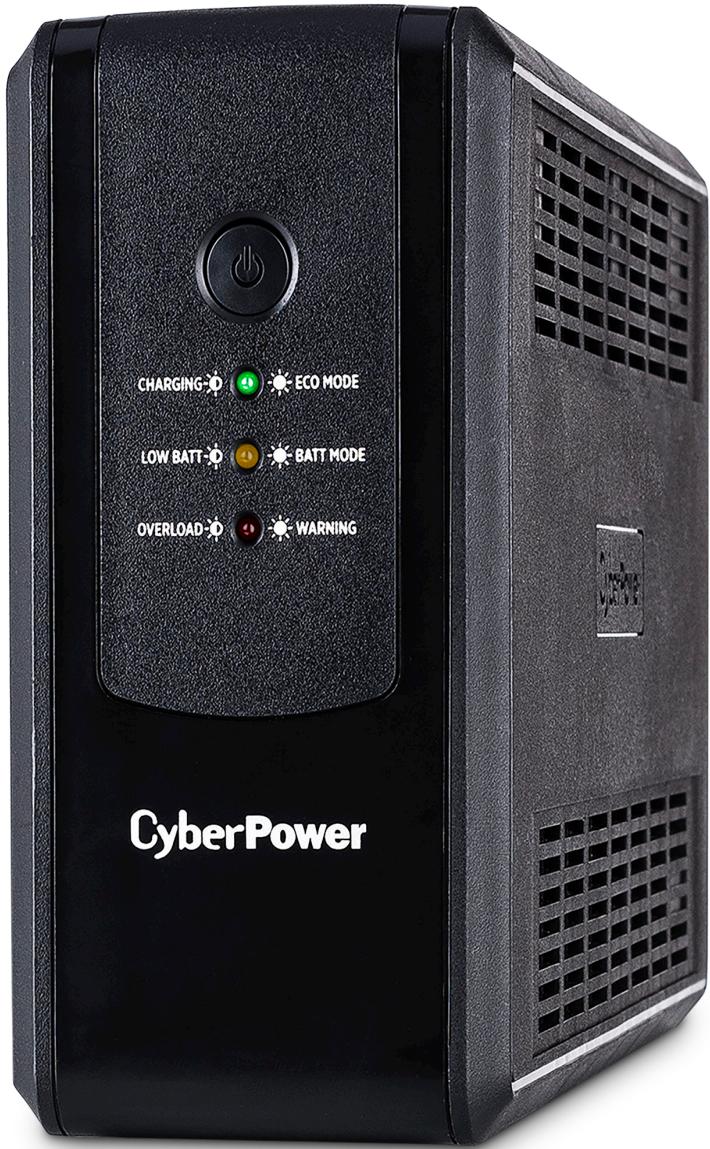

# UT750G

## BATTERY BACKUP

### SPECIFICATIONS

#### GENERAL

Energy Saving	GreenPower UPS™ Bypass Technology
UPS Topology	Line Interactive

#### BATTERY

Battery Type	Sealed Lead-Acid Battery
Runtime at Full Load	
Runtime at Half Load	
Typical Recharge Time	6 Hours
User-Replaceable Battery	No

#### INPUT

Input Frequency Range	45 Hz to 55 Hz 55 Hz to 65 Hz
Input Plug Type	NEMA 5-15P
Input Voltage Range	86 VAC to 148 VAC
Nominal Input Voltage	110 to 130 VAC

#### OUTPUT

Automatic Voltage Regulation	Single Boost Single Buck
On Battery Frequency	50 to 60 Hz +/- 1%
On Battery Voltage	120 VAC +/- 10%
On Battery Waveform	Simulated Sine Wave
Outlet Type	8 - NEMA 5-15R
Outlets - Battery & Surge Protected	4
Outlets - Surge-Only Protected	4
Outlets - Total	8
Overload Protection	Circuit Breaker Protected
Typical Transfer Time	4 ms
VA	750 VA
Watts	375 W

#### SURGE PROTECTION & FILTERING

EMI/RFI Filtration	Yes
Surge Suppression	245 J



#### MANAGEMENT & COMMUNICATIONS

Audible Alarms	Battery Mode Low Battery Overload Fault
LED Indicators	Power On Battery Mode Fault Line Mode Bypass Mode Low Battery Overload

#### PHYSICAL

Color	Black
Form Factor	Tower

#### PHYSICAL DIMENSIONS

Physical Dimensions - Width/Height/Depth	8.38 x 17.02 x 27.94 cm
Physical Dimensions - Width/Height/Depth	84 x 170 x 279 mm
Physical Dimensions - Width/Height/Depth	3.3 x 6.7 x 11.0 in.
Weight	4.40 kg
Weight	9.70 lbs.

#### SHIPPING DIMENSIONS

Shipping Dimensions - Width/Height/Depth	10.9 x 23.29 x 31.5 cm
Shipping Dimensions - Width/Height/Depth	108.97 x 232.92 x 314.96 mm
Shipping Dimensions - Width/Height/Depth	4.29 x 9.17 x 12.4 in.
Shipping Weight (kg)	4.63 kg
Shipping Weight (lbs.)	10.20 lbs.



# UT750G

## BATTERY BACKUP

### SPECIFICATIONS - CONTINUED

ENVIRONMENTAL		WARRANTY	
Online Thermal Dissipation	8 BTU/hr	Product Warranty	Two-Year Limited
Operating Relative Humidity	0 to 90% (non-condensing)		
Operating Temperature	32 to 104 °F (0 to 40 °C)		
CERTIFICATIONS			
Environmental	RoHS Compliant		
Safety	NOM		