

TULIP PENDANT LAMP






IMPORTANT SAFETY INSTRUCTIONS:

- Consult certified electrician before installation that familiar with commercial type of applications.
- To reduce risk of fire, use 12-watt Compact Fluorescent lamp and do not exceed the recommended wattage.
- The manufacturer and distributor accepts no liability for incorrect installation.
- The ceiling must have at least the capacity of 5 times the weight of the ceiling light. For this light at least a ceiling capacity of 30 kg is required.
- Maximum Supply Current 1 A

WARNING


- Turn-off electricity supply at main circuit panel before installing. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
- To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
- Deviation from instructions may result in a risk of fire or electric shock.
- Suitable for indoor use only.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- Terminal block not included. Installation may require advice from a qualified person.

SCREW TERMINAL BLOCK - Connect the cable of the luminaire with the screw terminal block approved in according with IEC/EN 60998-2-1 with minimal rated voltage 250-3 x 2,5 mm² at supply cable.

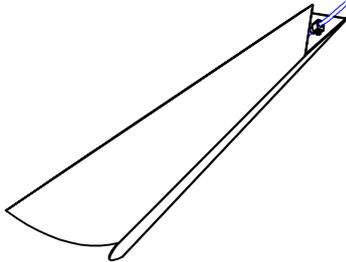A		BLACK PLASTIC CORD PROTECTOR (1PC)
B		3.5 MM THK. HEXAGONAL NUT (1PC)
C		5 MM THK. HEXAGONAL NUT (2PCS)
D		SPRING WASHER (1PC)
E		CROSS BAR (1PC)
F		LONGER ALL-THREAD (1PC)
G		PLAIN WASHER (1PC)
H		FIXTURE LOOP (1PC)
I		SUSPENSION WIRE (1PC)
J		WIRE GRIP (2PCS)
K		CANOPY (1PC)
L		PHILLIPS HEAD BOLT (2PCS)
M		GLASS BALL (1PC)
N		CHANDELIER


STEP #1

- Open the parts bag and place all on a flat surface.
- Remove the chandelier body and lay on a flat surface.
- Slide the electrical wire from the chandelier by loosening a bolt installed on the stopper.

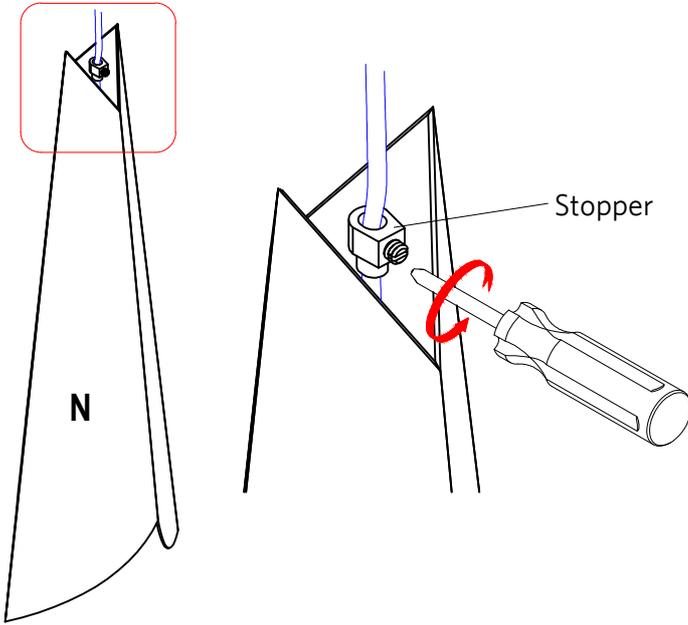


STEP #2

- Install the bulb (provided by client).
- Gently bend the neckless holder, then position the glass ball (M) to set on the neckless holder
- Pull the electrical wire with lamp up come back and tighten a bolt against.

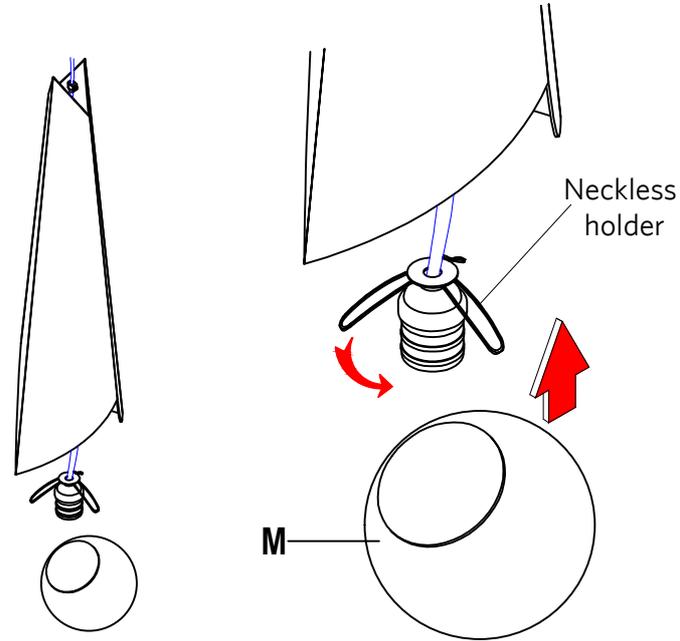


STEP #3

- Set-up the cross bar according the set of hardware as sketch below.

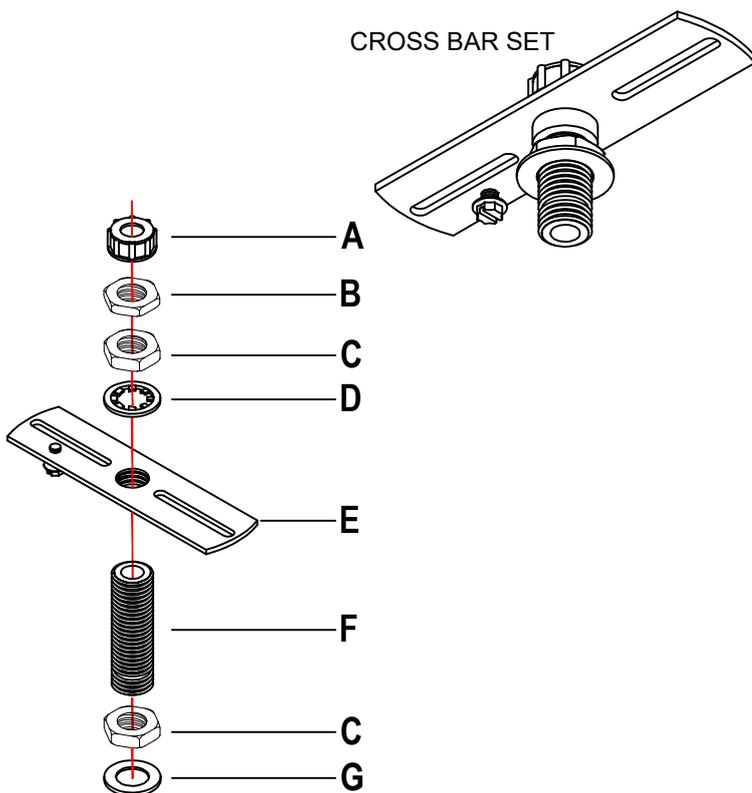



STEP #4

- Insert the electrical wire into the hole of the fixture loop (H), Canopy (K) and into the set of cross bar.
- Set the chandelier near the ceiling surface and Connect the wiring fixture into the junction box. Once the wiring is set then fasten the cross bar into the junction box.

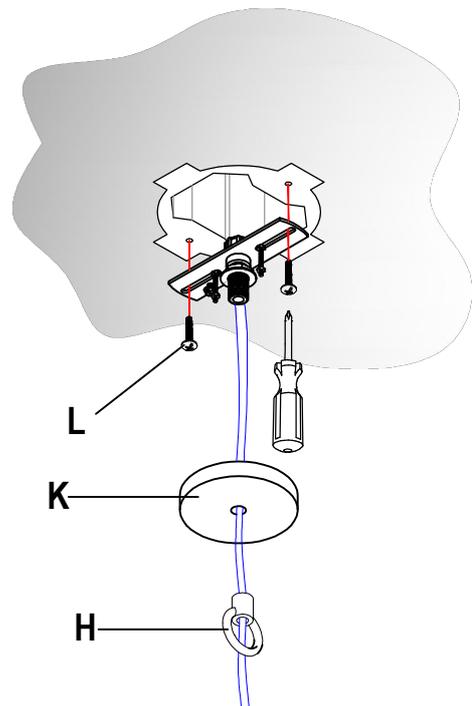

STEP #5

- Attach one end of the suspension wire (I) to Fixture Loop installed.
- You will need a pair of pliers to squeeze the wire grips (J). Make sure these are clamped tight around the suspension wire.

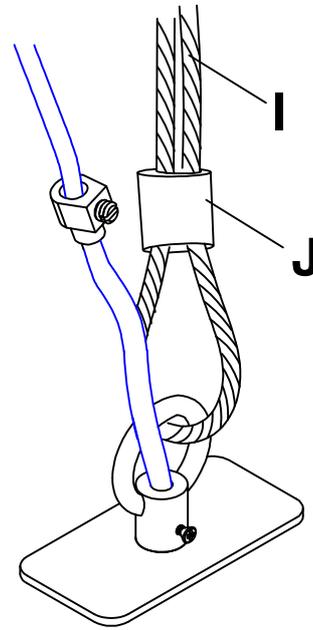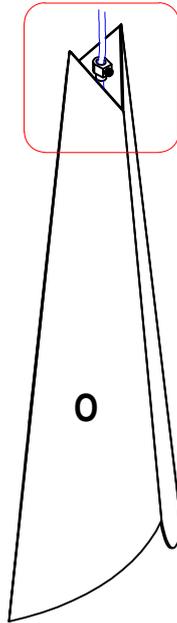

STEP #6

- Push the canopy to the ceiling and tightness flush with the ceiling by spinning onto the all thread Fixture Loop (H).
- Attach one end of the suspension wire (I) to Fixture Loop (H).
- You will need a pair of pliers to squeeze the wire grips (J). Make sure these are clamped tight around the suspension wire.
- Attach the open end of the suspension.

