

# MVC

## 3 or 4-Lights Vanity Lights

### Product Description

Enhance the ambiance of any space with the MVC 3 or 4-Lights Vanity Lights. This modern yet timeless design features a steel base with a nickel finish that mounts to a wall and supports a trio or quad of opaline glass shades. Versatile and flexible, this fixture can be mounted upwards for an ambient lighting, or downwards for a more focused illumination above your kitchen, bathroom sink, over a bookcase, or in hallways.

#### Construction

- Steel base and stem
- Opaline glass shade
- Accommodates three or four type A bulb, E26 base 60W max incandescent bulb or one 9W LED bulb (not included)
- Mounting: up or downward position
- Suitable for bathroom use
- Available in two lengths: 22" (559 mm) ; and 32" (813 mm)
- Dimmable bulb recommended for use with dimmer switch
- Hardwired fixture; professional installation recommended

#### Maintenance

- Wipe with a soft cloth
- No abrasive cleaners

#### Electrical

- Input Voltage: 120 VAC
- Input Wattage: 27W LED max(3-LED bulb) and 36W LED max (4-LED bulb)

#### Mounting and installation

- Easy installation on a recessed junction box
- Fixture mounts directly to J-Boxes with mounting plate and threaded nipple
- For installations where power surge may be possible, NICOR recommends installing additional surge protection at the electrical distribution panel

#### Listings

- cETLus listed
- Damp location

#### Warranty

- 1-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Project \_\_\_\_\_

Catalog \_\_\_\_\_

Type \_\_\_\_\_

Date \_\_\_\_\_

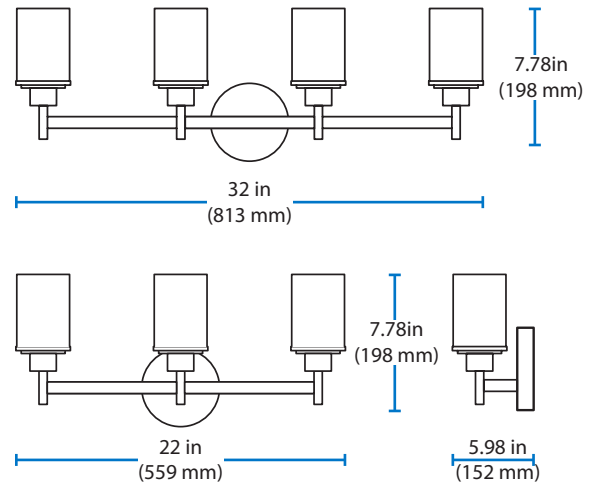

### Ordering Information

Example: MVC13120E26OPNK

Series	Version	# of Bulbs	Voltage	Light Source	Shade Finish	Accent Finish
MVC	1	3	120	E26 (Socket Only)	OP (Opal)	NK (Nickel)
		4				

Specifications and dimensions subject to change without notice. Please refer to the website for the most up-to-date information.