

# Lumination® LED Luminaires

## LRX Emergency Battery Backup Kit

### Retrofit Kit



CUSTOMER NAME \_\_\_\_\_  
 Project Name \_\_\_\_\_  
 Date \_\_\_\_\_ Type \_\_\_\_\_  
 Catalog Number \_\_\_\_\_

The Lumination® LRX Series EMBB Kit is a quick and easy retrofit emergency battery backup for use exclusively with the LRX family downlights equipped with the "EL" EMBB-ready option. Each kit comes ready to go with an LRX-compatible quick-disconnect to save valuable installation time. Test pushbutton for EMBB installs easily into the LRX reflector in the field without the use of tools. Simple Retrofit Solution for Emergency Downlighting.

### EMBB PERFORMANCE SUMMARY

<b>Input Voltage:</b>	120-277v
<b>Power Factor:</b>	>0.9
<b>Emergency Operation:</b>	90 minutes
<b>Operating Temp:</b>	0 – 55° degrees C
<b>THD:</b>	<20%
<b>Total Kit Weight:</b>	3.75 lbs

### ORDERING INFORMATION

**Example:** LRXR610835MD with 630lm EMERGENCY LIGHT = LRXR610835MDEL + LRXEMBBKIT07  
 LRXS830835MD with 900lm EMERGENCY LIGHT = LRXR830835MDEL + LRXEMBBKIT10

SKU	CAT # LOGIC TYPE	POWER	EMERGENCY MODE LUMENS	DESCRIPTION	BATTERY INFORMATION
93043031	LRXEMBBKIT07	7W	630lm	EMBB 7W kit for use with LRX***EL downlights	MFG lota P/N: ILB-CP07-R
93043540	LRXEMBBKIT10	10W	900lm	EMBB 10W kit for use with LRX***EL downlights	MFG lota P/N: ILB-CP10-R

\*\* LRX Downlight Fixture with "EL" option Sold Separately \*\*

# Lumination® LED Luminaires

## LRX Emergency Battery Backup Kit

### Retrofit Kit


### Dimensions

#### CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

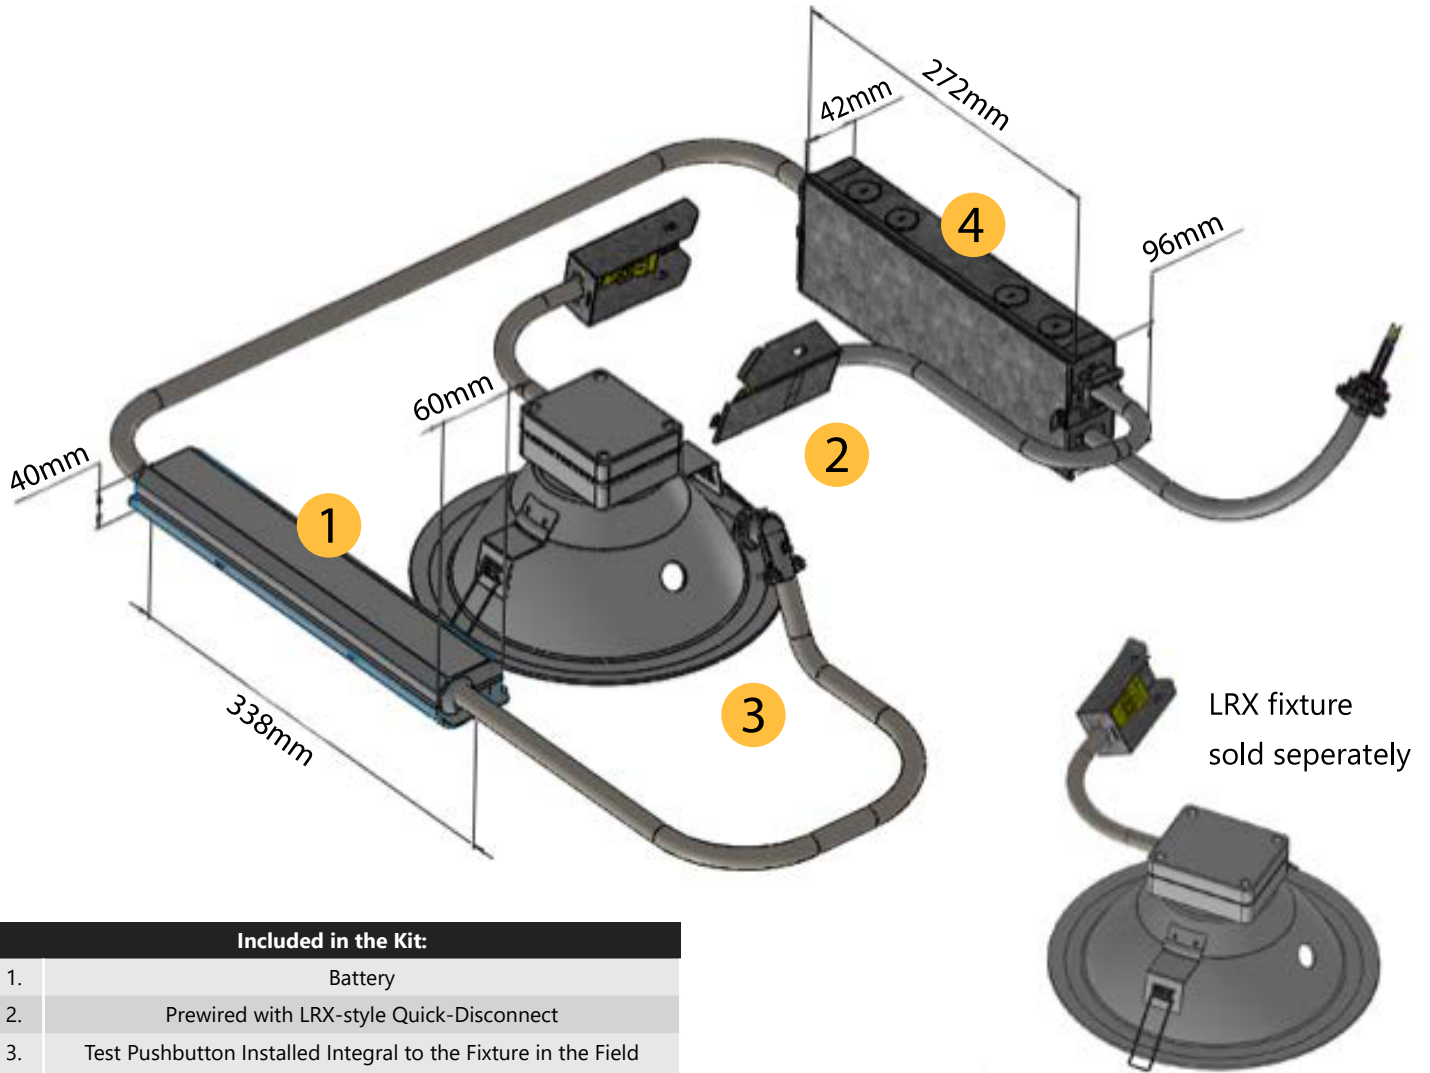

#### Included in the Kit:

1.	Battery
2.	Prewired with LRX-style Quick-Disconnect
3.	Test Pushbutton Installed Integral to the Fixture in the Field
4.	Junction box with EMI filter & appropriate wire connections

#### For Product or Technical Questions:

Email: [lightingproinfo@gecurrent.com](mailto:lightingproinfo@gecurrent.com)

Phone: +1 888 694 3533, option 2