


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	04/06/10	AM

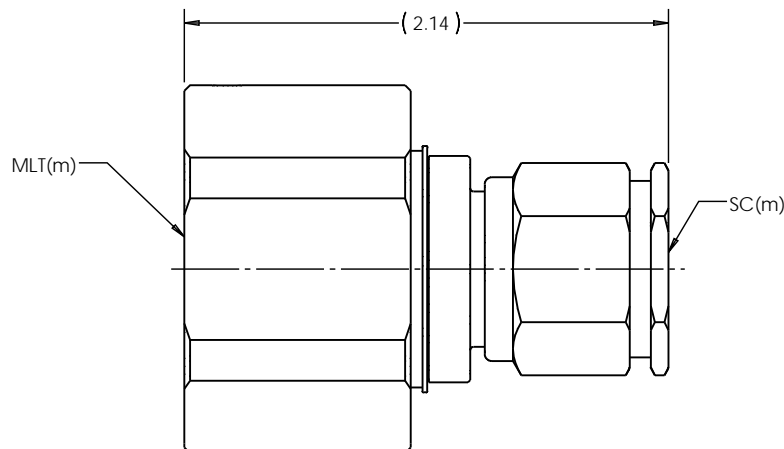

ENGINEERING DATA:

ELECTRICAL:

IMPEDANCE: 50 OHMS NOMINAL

MECHANICAL:

INTERFACE:

SC(m) PER MIL-STD-348 FIG. 309.1

MLT(m) PER MIL-C-87104/5

MATERIAL:

INSULATORS: TEFLON

O-RING AND GASKET: SILICONE RUBBER

CONTACT FINGER: BERYLLIUM COPPER

SC COUPLING NUT: STAINLESS STEEL

SNAP RING: PHOSPHOR BRONZE

OTHER METAL PARTS: BRASS



FINISH:

SC COUPLING NUT: PASSIVATED

OTHER METAL PARTS: SILVER PLATED

NOTES:

1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE REFERENCE ONLY.

MATERIAL:	DO NOT SCALE DRAWING	DRAWN mcampiglio	DATE 04/05/10	 TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01980 <i>The Custom Interconnect Leader™</i>	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR. AM	DATE 04/06/10		
		MFG APPR.	DATE		
		OTHER APPR.	DATE		
COMMENTS:	TOLERANCES: FRACTIONS: $\pm 1/64$ XX: $\pm .01$ XXX: $\pm .005$ ANGLES: $\pm 1/2^\circ$ MACHINED SURFACES: <div style="text-align: center;">63/√</div>	THIRD ANGLE PROJECTION 		TITLE: CONNECTOR, COAXIAL, RF MLT(m) to SC(m) ADAPTER	
surface area: sq inch	weight: lbs	SIZE B	DWG. NO. TRU-11480	REV -	
		CAGE CODE: 92180		SCALE: 2:1	SHEET 1 OF 1