







- 1 Removable, Reversible, and Lockable Front Door
- 2 Removable and Lockable Side Panels (4)
- 3 Vented Roof Panel
- 4 Removable and Lockable Split Rear Doors
- 5 Rear Accessory Channels (2)
- 6 Depth-adjustable Vertical Rack Angles (4)
- 7 Leveling Feet (4)
- 8 Casters (4)
- 9 Keys (2)

Hardware and Accessories

 User's Manual	 Shipping Bracket (2)	 Hex Key
 M6 Phillips-Head Screw (50)	 M6 Cage Nut (50)	 Cup Washer (50)

Specifications


Model	CR42U11001
Rack Height	42U
Max. Mounting Depth	35.6 in. (905 mm)
Weight Capacity-Stationary	3,000 lbs. (1,365 kg)
Weight Capacity-Dynamic	2,250 lbs. (1,020 kg)
Unit Dimensions (WxHxD)	23.6 x 78.4 x 42.1 in. (600 x 1992 x 1070 mm)
Shipping Dimensions (WxHxD)	25.6 x 84.6 x 45.3 in. (650 x 2150 x 1150 mm)
Unit Weight	282 lbs. (128 kg)
Shipping Weight	322 lbs. (146 kg)
Approvals	DIN41491, DIN41494, EIA/ECA-310-E, IEC 297-2, RoHS

#All specifications are subject to change without notice.


- Ships fully assembled.
- Hexagonally perforated front and rear doors provide optimal ventilation.
- Reversible front door allows opening from left or right to meet different installation requirements.
- Vertical adjustable rack angles can be adjusted in 1/4 inch increments for mounting depth requirements up to 36 inches. Depth index numbering ensures quick and consistent rail placement. U rack units are numbered front and back for easy equipment installation.




Hexagonal holes, compared with round holes, allow more efficient airflow and therefore optimize ventilation.

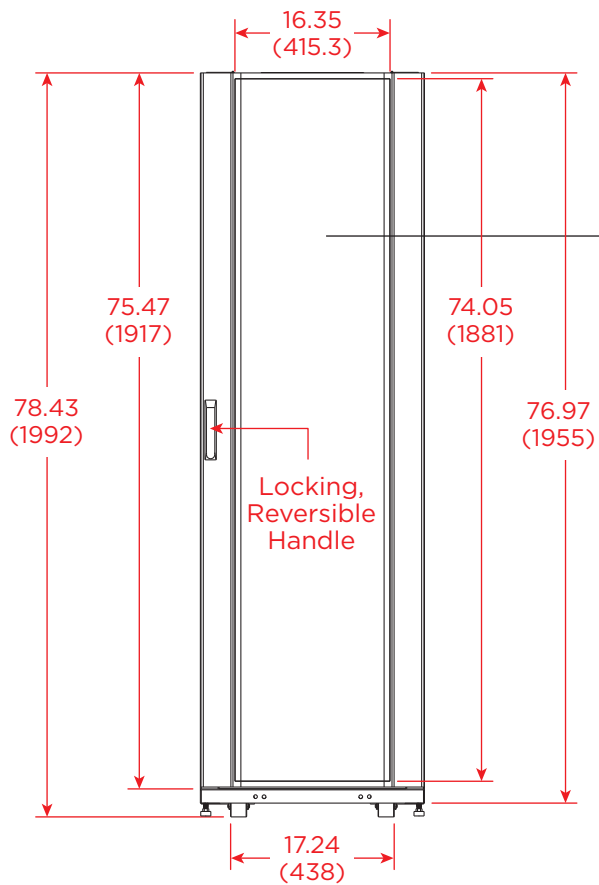


FRONT VIEW

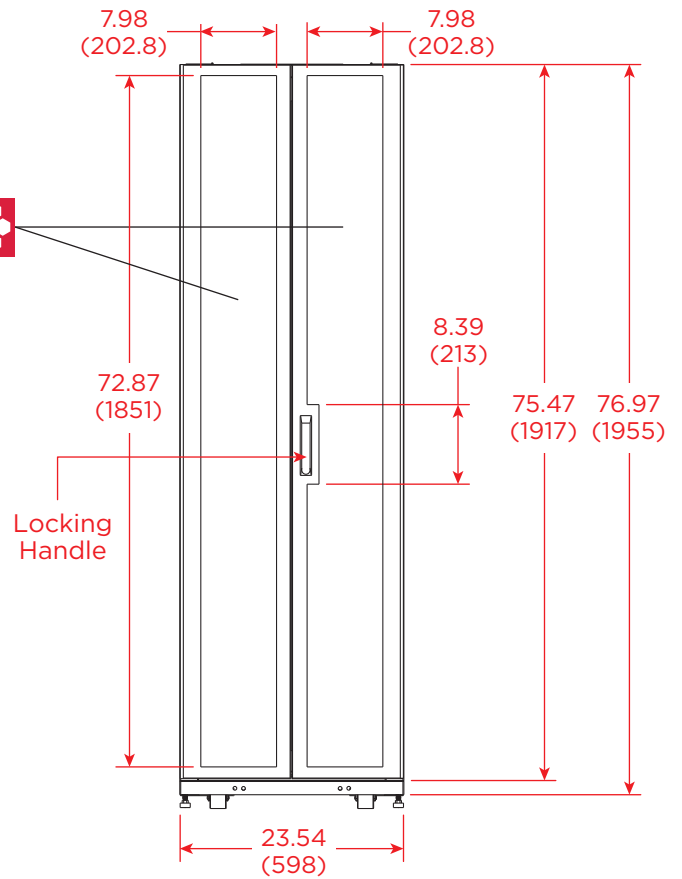


REAR VIEW

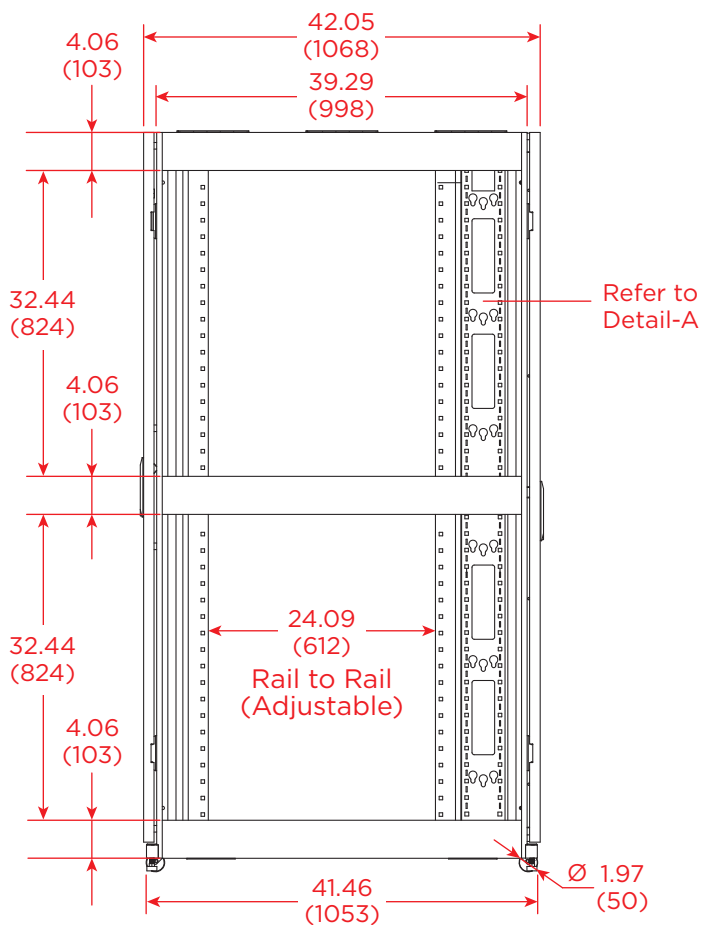


SIDE VIEW W/O SIDE PANELS

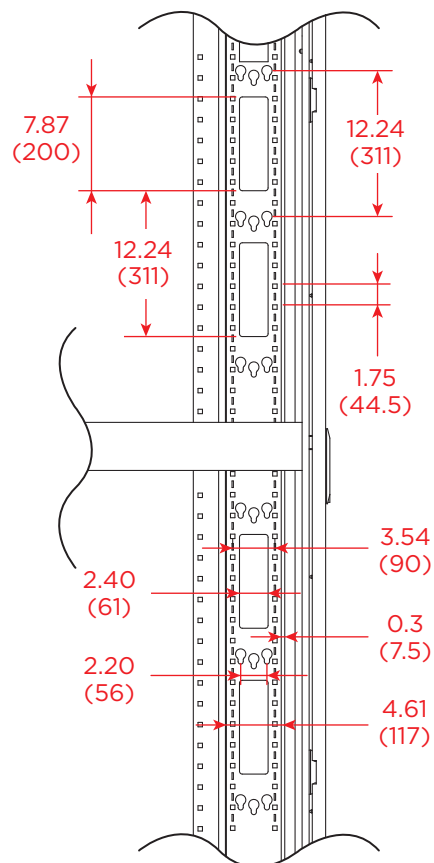


DETAIL-A

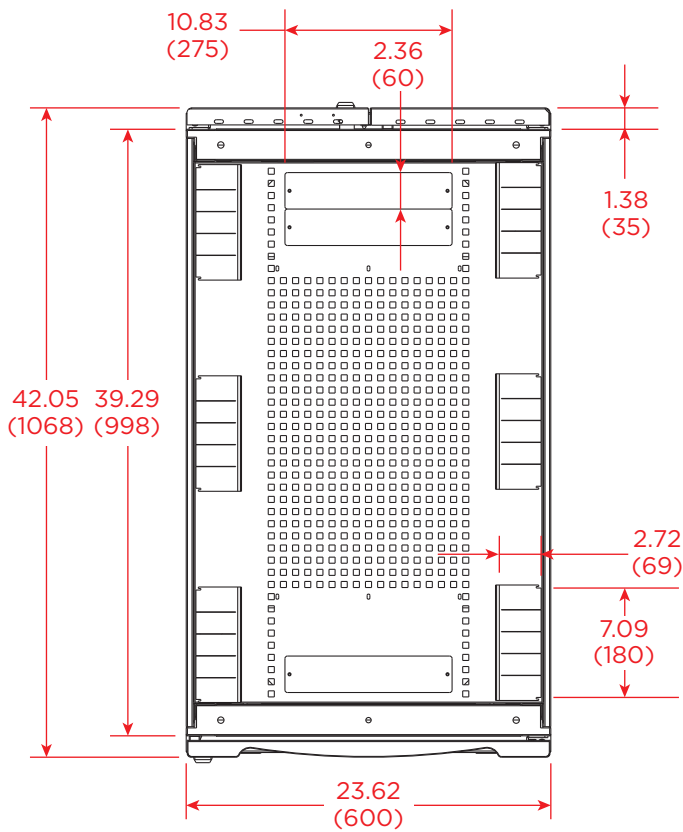


TOP VIEW

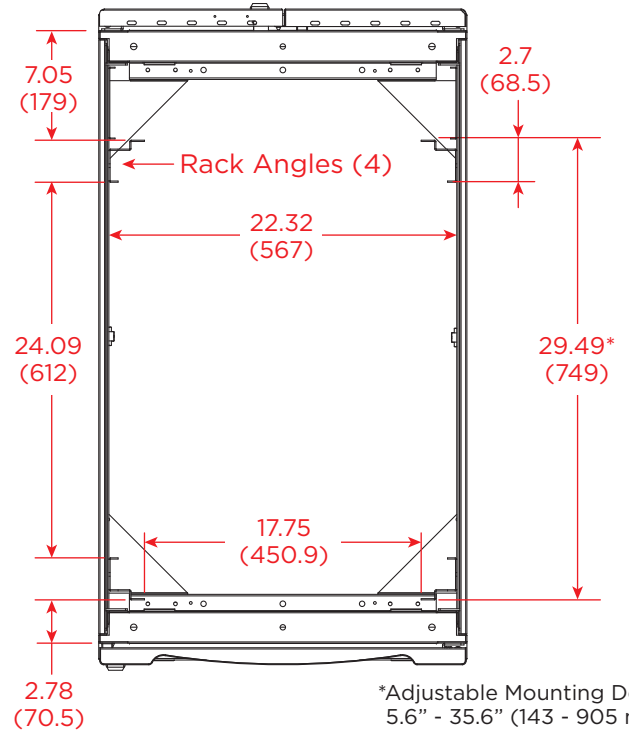

TOP VIEW W/O ROOF PANEL

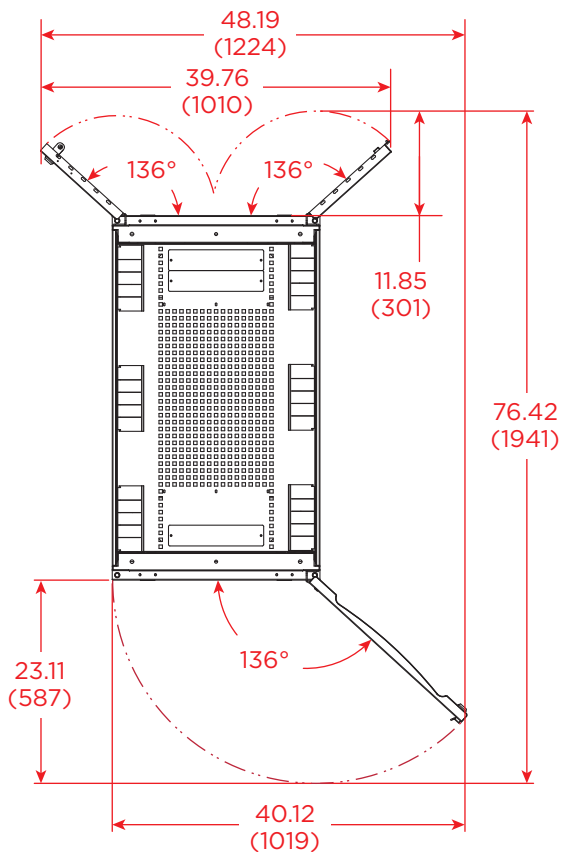

TOP VIEW (DOORS FULLY OPEN)

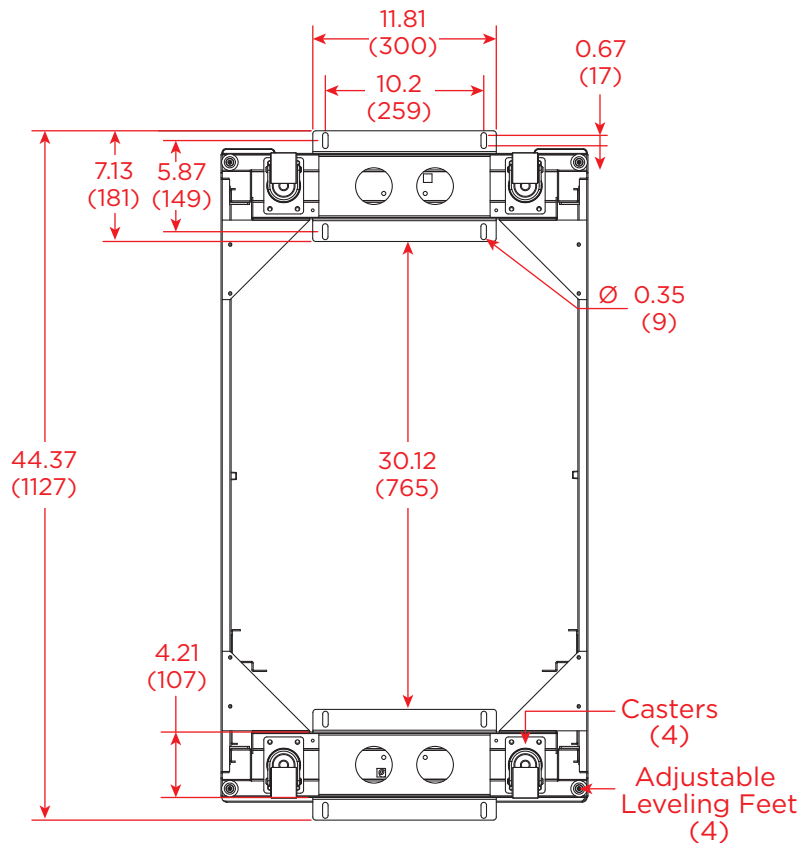

BOTTOM VIEW W/ SHIPPING BRACKETS

*It is recommended to install the shipping brackets inside the enclosure and the optional rack enclosure stabilizer kit (CRA60004) on the outside to reinforce the stability of the enclosure.

CyberPower®
Cyber Power Systems, Inc.
www.cyberpower.com

USA and Canada:
 4241 12th Ave East, Suite 400
 Shakopee, MN 55379
 Toll-free: (877) 297-6937

All other regions:
 Please visit our website for local contact information.

Dimensions: INCHES (mm)