

Neo™ Exhilaration Hand Held Filtered Showerhead

MODELS:

- VSF-5000-E2: 2.0 GPM (7.6 L/min) flow rate
- VSF-5000-E175: 1.75 GPM (6.6 L/min) flow rate

FEATURES:

- 344 spray outlets, 4 spray patterns and pause mode
- Exhilaration Spray Technology® includes patented Speakman Reaction high performance turbine engine
- 5 setting spray face includes Inner Massage, Satin Spray, Speakman Reaction, Rain, and Pause
- Spray adjusting faceplate, with optimum spray setting when in vertical position
- Plastic body construction
- 1/2" -14 NPS male inlet
- Includes coordinating shower bracket with 1/2" -14 NPT brass ball nut, female inlet, 1/2" - 14 NPS male outlet with check valve
- Includes 5' metal hose with 2x 1/2"-14 NPS connections
- Includes filter cartridge comprised of 100% KDF media. Recommend replacing cartridge every 3 months (FS-2)
- Dual locking handle and cartridge
- Minimally sized handle to maintain sleek aesthetic
- Corrosion resistant finishes
- Coordinates with Neo Collection



STOCK FINISH:



PC


STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- WaterSense certified
- CEC (CA Energy Commission) certified, 1.75, 1.5 GPM only
- ADA compliant
- NSF 177

WARRANTY:

Visit www.speakman.com for full product warranty information

- Limited Lifetime Warranty (residential)
- 1 Year Limited Warranty (commercial)

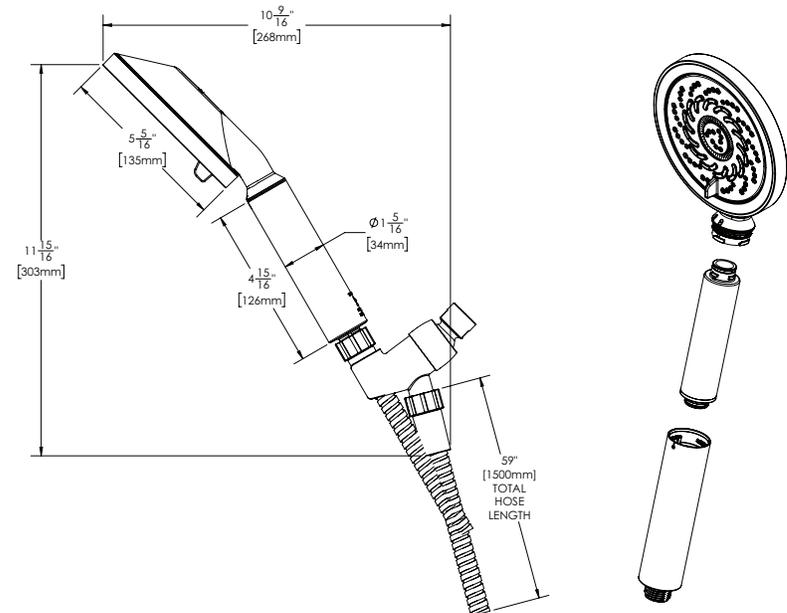

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
 F: 800-977-2747
 W: WWW.SPEAKMAN.COM
 R: 02-APRIL 2024