

Rain Shower Square 10" - 1.75 GPM

FEATURES

- Single Function, contemporary-design square showerhead
- Balanced Comfort Wave® technology with wide coverage rinse & wash
- 10" (250 mm) diameter spray face
- WaterSense® certified high-efficiency 1.75 gpm (6.6 lpm)
- Rubber nozzles to prevent lime scale build up
- Meets 2018 California water efficiency appliance CEC regulations
- Includes matching escutcheon
- Shower arm sold separately

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

Made to order

- #PBR Polished Bronze
- #PFG Polished French Gold

PRODUCT SPECIFICATION

Product shall be TOTO Model TBW08002U4#____.
 Product shall have comfort wave. Product shall have a maximum flow rate of 1.75 gpm (6.6 lpm). Product shall have a single spray. Product shall have 10" (250mm) diameter spray face. Product shall have rubber nozzles to prevent lime scale build up. Product shall meet 2018 California water efficiency appliance CEC regulations. Product shall include matching escutcheon. Product shower arm sold separately.

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, CEC, DoE, and others
- Complies with CA Prop 65 warning requirements



Please note the following components are sold separately



TBW07025U: Rain Shower Arm Wall-Mount, 16"




TS110MC6: Rain Shower Arm Ceiling Mount 6"

TBW08002U4


Rain Shower Square 10" - 1.75 GPM

SPECIFICATIONS

Warranty	Lifetime Limited Warranty (Residential Use) One Year (Commercial Use)
Material	Brass
Maximum Flow Rate	1.75gpm (6.6lpm)
Shipping Dimensions	17-15/16" L x 14-7/16" W x 5-1/6" H
Shipping Weight	8.0 lbs

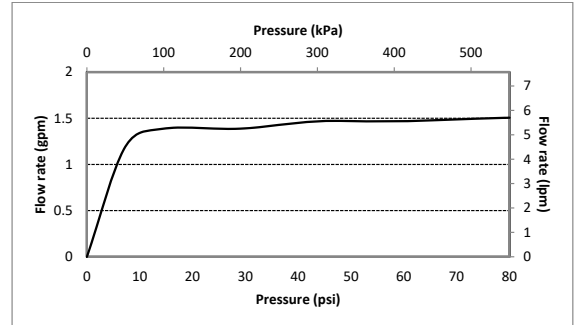

DIMENSIONS

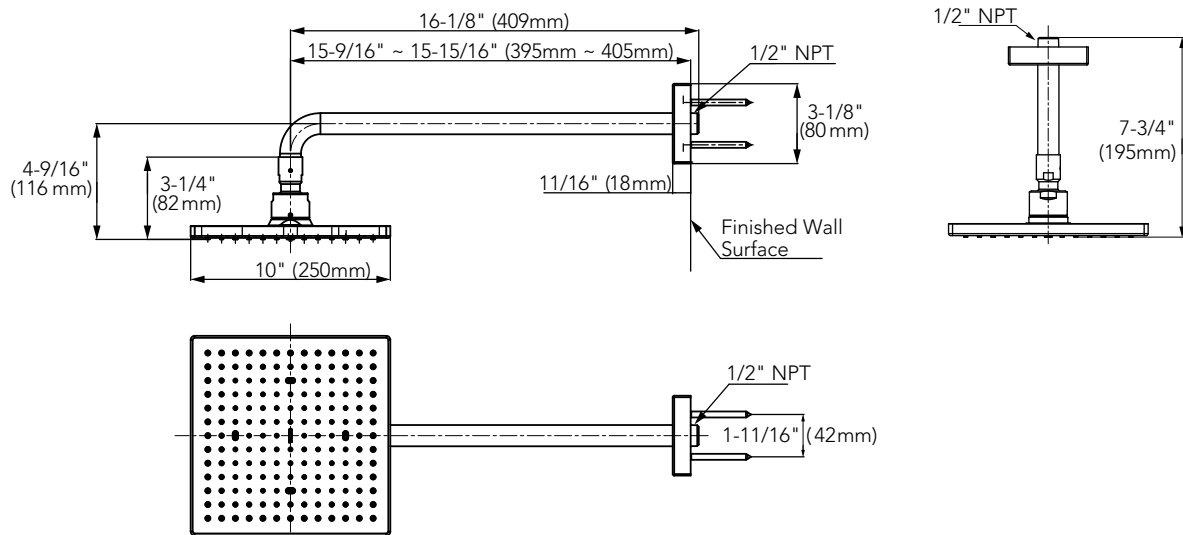

Note: The unit of above dimension is inch (mm).

Note: Shower arm and mounting bracket are not included.