


SPEAKMAN® SM-5000

SentinelPro™ Thermostatic Pressure Balance Valve and Trim Combination

FEATURES:

- Speakman SentinelPro concealed anti-scald thermostatic/pressure balance valve.
- Chrome plated Brass wall plate with metal index.
- Chrome plated metal lever handle.
- Adjustable temperature limit stop (TLS).
- Factory set @ 110 F°. Brass body with integral spring check stops.
- Dual function thermostatic/pressure balance cartridge.
- Can be installed back-to-back.
- Includes rough-in template.
- Four port valve with ½ in. female Copper sweat and ½ in. NPT male inlets and outlets.
- Furnished with ½ in. cap.
- Construction is Forged Brass Body and Brass Bonnet.
- Maximum capacity is 4.3 gpm +/- .2 @ 45 psi.
- Maximum Hot Water Supply Temperature is 185°F. Minimum Hot Water Supply Temperature is 5°F above set point.
- Maximum Operating Temperature is 120°F.
- Valve Temperature Set Point is 110°F (Based on 115-120°F hot & 55-65°F Cold).
- Maximum Static Pressure is 125 psi.
- Minimum flow (for +/-3°F performance) meets ASSE 1016 to 1.5 gpm (5.7 L/min).

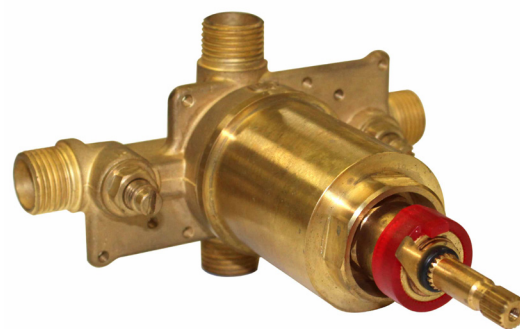

FINISH:



PC

OPTIONS:

- Contractor Packs Available

COMPLIANCE:

- Certified to ASME A112.18.1/CSA B125.1
- Certified to ASSE 1016/ASME A112.1016/CSA B125.16

WARRANTY:

- 5 Year Limited

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: DECEMBER 2017

DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified all inlets and outlets are 1/2" female copper sweat. 3. For ADA mounting locations consult ADAAG, ANSI A17.1, or state regulations.

