

HomeWorks Designer RF Maestro Local Controls

HomeWorks RF Maestro local controls function much like standard dimmers and switches, but can be controlled as part of a lighting control system. Local lighting controls are useful in locations where single circuits of lighting need to be dimmed or switched. Local fan speed controls are useful in locations where control of a single ceiling paddle fan is needed.

HomeWorks RF Maestro dimmers incorporate advanced features such as fade on/fade off, delayed long fade to off, and rapid full on.

HomeWorks RF Maestro local controls include a Front Accessible Service Switch (FASS) for safe lamp replacement. HomeWorks RF Maestro local controls install in single-pole or multi-location applications. Remote dimmers/switches are available for multi-location control.

Use Lutron Designer (Claro or Satin Colors) wallplates or designer-style wallplates from other manufacturers. Wallplates are sold separately. Lutron Claro and Satin Colors wallplates snap on with no visible means of attachment. HomeWorks RF Maestro local controls support color change kits.



Dimmer



Switch



Fan Speed



Remote Dimmer



Remote Switch

HomeWorks Designer RF Maestro Local Controls

Model Numbers

Dimmers

| | |
|-----------------|-----------------------------------------------------------------------------------------------------------------|
| HQRD-6CL-XX | 600 W/VA (Incandescent/Halogen/MLV) or 150 W (CFL/LED) Two-Wire Dimmer* |
| HQRD-6D-XX | 600 W Two-Wire Dimmer |
| HQRD-6ND-XX | 600 W Neutral Wire Dimmer |
| HQRD-10D-XX | 1000 W Two-Wire Dimmer |
| HQRD-10ND-XX | 1000 W Neutral Wire Dimmer |
| HQRD-6NA-XX | 600 W Neutral Phase Adaptive Dimmer |
| HQRD-F6AN-DV-XX | 6 A Fluorescent/LED 3-Wire Dimmer |
| HQRD-PRO-XX | 250 W (CFL / LED) or 500 W/VA Incandescent/Halogen/ELV or 400 VA MLV Phase Selectable, Neutral Optional dimmer* |

Switches

| | |
|---------------|--------------------------------|
| HQRD-8ANS-XX | Neutral Wire Electronic Switch |
| HQRD-8S-DV-XX | Two-Wire Electronic Switch |

Fan Speed Control (single ceiling paddle fan only [120 V~])

| | |
|--------------|-----------------------|
| HQRD-2ANF-XX | 2 A Fan Speed Control |
|--------------|-----------------------|

Remotes (for multi-location installations)

| | |
|---------------|-----------------------------------------------------|
| HQD-RD-XX | Remote Dimmer (120 V~) |
| HQD-RS-XX | Remote Switch (120 V~) |
| HQD-RD-277-XX | Remote Dimmer (277 V~) (for use with -F6AN-DV only) |
| HQD-RS-277-XX | Remote Switch (277 V~) (for use with -8S-DV only) |

Color Change Kits

| | |
|----------|--------------------------------------------------------|
| RK-D-XX | Dimmers (-6CL, -6D, -10D, -10ND, -6NA, -PRO, -F6AN-DV) |
| RK-S-XX | Switches (-8ANS and -8S-DV) |
| RK-AD-XX | Remote Dimmer (-RD) |
| RK-AS-XX | Remote Switch (-RS) |
| RK-F-XX | Fan Speed Control (-2ANF) |

* Go to www.lutron.com/ledfinder to see all compatible CFL / LED lamps.

Note: "XX" in the model number represents color/finish code. See **Colors and Finishes** at end of document.

HomeWorks Designer RF Maestro Local Controls

Specifications

| | |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model Numbers | Dimmer: HQRD-6CL, HQRD-6D, HQRD-6ND, HQRD-10D, HQRD-10ND, HQRD-6NA, HQRD-F6AN-DV, HQRD-PRO Switch: HQRD-8ANS, HQRD-8S-DV Fan Speed Control: HQRD-2ANF Remote: HQD-RD, HQD-RS, HQD-RD-277, HQD-RS-277 Color Change Kits: RK-D, RK-S, RK-AD, RK-AS |
| Power | 120 V~ 50/60 Hz: -6CL, -6D, -10D, -10ND, -6NA, -2ANF, -8ANS, -RD, -PRO, -RS 120-277 V~ 50/60 Hz: -F6AN-DV, -8S-DV |
| Typical Power Consumption | Dimmer/Switch/Fan Speed Control: 0.6 W Test conditions: load is off and nightlight mode is enabled. Remote Dimmer/Switch: 0 W Test conditions: load is off. |
| Regulatory Approvals | UL, CSA (all except -6CL, -6NA and -PRO), cUL (-6CL, -6NA, -PRO only), NOM, FCC, IC, COFETEL, ANATEL (all except -6NA, -6CL and remotes) |
| Environment | Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C), 0% to 90% humidity, non-condensing. Indoor use only. |
| Communications | Dimmers and switches communicate with the HomeWorks system through Radio Frequency (RF) and must be located within 30 ft (9 m) of a repeater. Remote dimmers/switches are not required to be within a specific range of a repeater. |
| ESD Protection | Tested to withstand electrostatic discharge without damage or memory loss, in accordance with IEC 61000-4-2. |
| Surge Protection | Tested to withstand surge voltages without damage or loss of operation, in accordance with IEEE C62.41-1991 Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits. |
| RTISS Equipped | Circuitry compensates in real time for incoming line-voltage variations (neutral connection required). -PRO only. |
| Power Failure | Power failure memory: should power be interrupted, the control will return to its previous state when power is restored. |
| Mounting | Requires a U.S. wallbox. 3½ in (89 mm) deep recommended, 2¼ in (57 mm) deep minimum. |
| Wiring | Use only remote dimmers (-RD/-RD-277) and remote switches (-RS/-RS-277) with dimmers/switches/fan speed controls. Up to 9 -RD/-RD-277 or -RS/-RS-277 may be used with controls. |
| Warranty | www.lutron.com/TechnicalDocumentLibrary/warranty.pdf |

HomeWorks Designer RF Maestro Local Controls

Design Features

Dimmer

- On a single-tap, lights fade ON or OFF.
- On a double-tap, lights go to full ON.
- When ON, press and hold the tapswitch to engage the delayed long fade to OFF.
- Light levels can be fine-tuned by pressing and holding the dimming rocker until the desired light level is reached.
- Neutral and two-wire dimmers available.

Switch

- On a single-tap, lights or motors turn ON or OFF.
- Neutral and two-wire switches available.


Fan Speed Control

- On a single-tap, fan turns ON or OFF.
- Fan speeds can be selected by pressing and holding the fan speed control rocker until the desired fan speed is reached.
- Controls one paddle-type ceiling fan (Permanent split-capacitor motor) up to 2 A. Not for use with shaded-pole type motors (e.g., bath exhaust fans).
- Provides 4 quiet speeds plus OFF.
- Not for use with fans that have integrated fan speed and/or light control modules.
- Requires a neutral connection.


HomeWorks Designer RF Maestro Local Controls

Dimensions

All dimensions are shown as: in (mm)

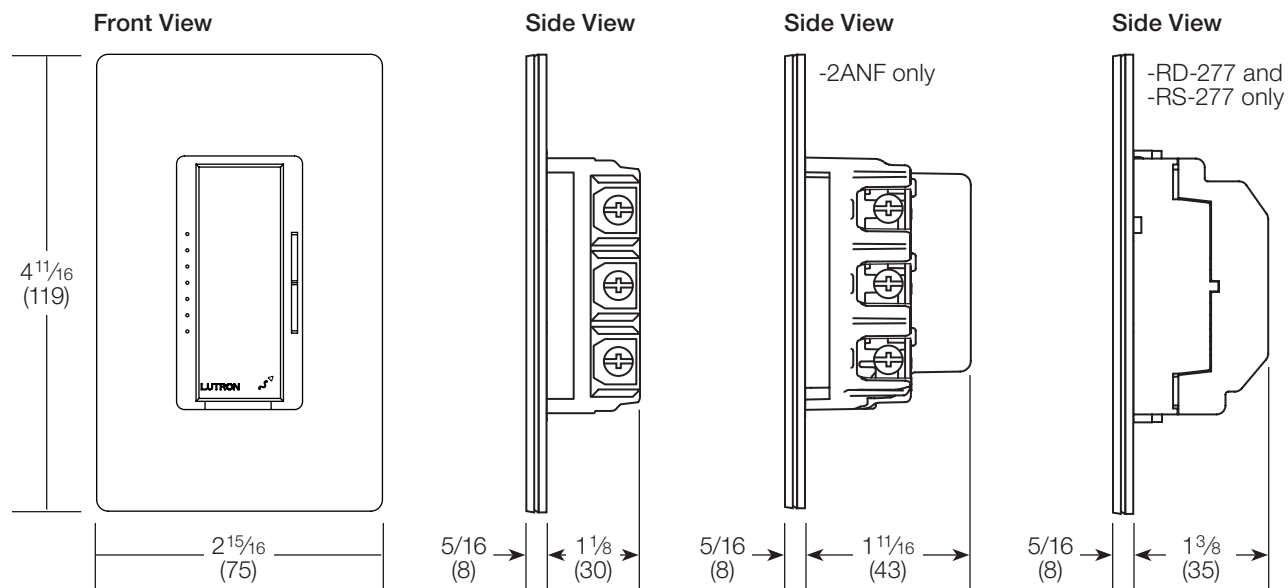

Mounting and Parts Identification

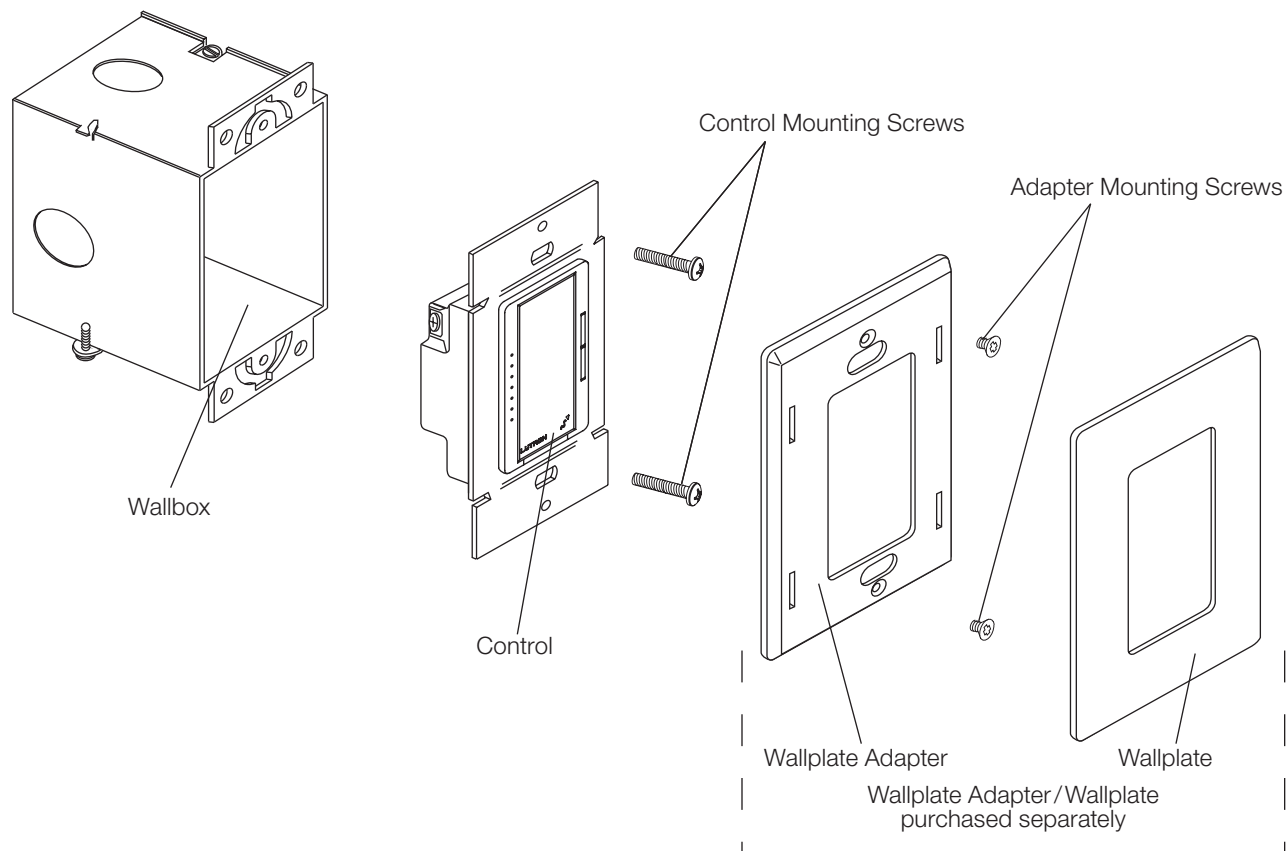




HomeWorks Designer RF Maestro Local Controls

Ganging and Derating

When combining controls in the same wallbox, derating is required (see **Load Type and Capacity**). No derating is required for remote dimmers, remote switches, or fan speed controls.

Load Type and Capacity

| | |  |  |  | |
|---------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------|
| Load Type | Minimum Load | A Not Ganged | B End of Gang | C Middle of Gang | Neutral Connection |
| HQRD-6CL ¹ | | | | | |
| Incandescent/Halogen/CFL/LED | see <i>Mixing Lamp Types</i> , page 9 | | | | No |
| MLV ^{2,3} | 50 W/VA | 450 W/600 VA | 400 W/500 VA | 300 W/400 VA | |
| HQRD-6D ¹ | | | | | |
| Incandescent/Halogen | 50 W | 600 W | 500 W | 400 W | No |
| MLV ² | 50 W/VA | 450 W/600 VA | 400 W/500 VA | 300 W/400 VA | |
| HQRD-6NA ^{1,4} | | | | | |
| LED | Varies ⁵ | 150 W | 150 W | 150 W | Yes |
| Incandescent/Halogen/ELV ² | 5 W | 600 W | 500 W | 400 W | |
| MLV ^{2,3} | 5 W/VA | 450 W/600 VA | 400 W/500 VA | 300 W/400 VA | |
| HQRD-6ND ^{1,4} | | | | | |
| LED | Varies ⁵ | 150 W | 150 W | 150 W | Yes |
| Incandescent/Halogen | 10 W | 600 W | 500 W | 400 W | |
| MLV ^{2,3} | 10 W/VA | 450 W/600 VA | 400 W/500 VA | 300 W/400 VA | |
| HQRD-10D ¹ | | | | | |
| Incandescent/Halogen | 50 W | 1000 W | 800 W | 650 W | No |
| MLV ² | 50 W/VA | 800 W/1000 VA | 600 W/800 VA | 500 W/650 VA | |
| HQRD-10ND ^{1,4} | | | | | |
| LED | Varies ⁵ | 150 W | 150 W | 150 W | Yes |
| Incandescent/Halogen | 10 W | 1000 W | 800 W | 650 W | |
| MLV ^{2,3} | 10 W/VA | 800 W/1000 VA | 600 W/800 VA | 500 W/650 VA | |

- ¹ Dimmer Load Type:
- -6D, -6ND, -10D, -10ND: designed for use with permanently-installed incandescent, LED, magnetic low-voltage, or tungsten halogen only.
 - -6CL: designed for use with permanently-installed incandescent, magnetic low-voltage, tungsten halogen, CFL, or LED only.
 - -6NA: designed for use with permanently-installed incandescent, LED, electronic low-voltage, magnetic low-voltage, or tungsten halogen only.

Note: Do not install dimmers to control receptacles or motor-operated appliances.

- ² Low-Voltage Applications: -6CL, -6D, -6ND, -10D -10ND: use with magnetic (core and coil) low-voltage transformers only. Not for use with electronic (solid-state) low-voltage transformers.
- Low-Voltage Applications: -6NA: use with electronic (solid-state) or magnetic (core and coil) transformers.
- Operation of a low-voltage circuit with lamps inoperative or removed may result in transformer overheating and premature failure. Lutron strongly recommends the following:
- Do not operate low-voltage circuits without operative lamps in place.
 - Replace burned-out lamps as soon as possible.
 - Use transformers that incorporate thermal protection or fused transformer primary windings to prevent transformer failure due to overcurrent.




- ³ Do not mix CFL or LED loads with MLV loads.

- ⁴ Power Boosters/Load Interfaces: -6NA, -6ND and -10ND can be used to control power boosters/load interfaces. For a list of compatible power boosters/load interfaces see **Compatible Power Boosters and Load Interfaces**, page 10.

- ⁵ Minimum load depends on lamp and is not limited to a particular wattage. Refer to the LED Product Selection Tool at www.lutron.com/ledtool

HomeWorks Designer RF Maestro Local Controls

Load Type and Capacity (continued)

| | |  |  |  | | |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------|---------------------|
| Load Type | Minimum Load | A Not Ganged | B End of Gang | C Middle of Gang | Neutral Connection | Required Phase Mode |
| HQRD-PRO | | | | | | |
| LED | 1 bulb ² | 250 W | 200 W | 150 W | Optional ¹ | Either |
| CFL | 1 bulb ² | 250 W | 200 W | 150 W | Optional ¹ | Forward |
| MLV Transformer with LEDs | See Application Note #559 (P/N 048559) at www.lutron.com No Derating Required | | | | Required | Forward |
| ELV Transformer with LEDs | | | | | | Reverse |
| MLV Transformer with Halogen | 10 W | 400 VA (300 W) | No Derating Required | | Required | Forward |
| ELV Transformer with Halogen | 10 W | 500 W | 400 W | 300 W | Required | Reverse |
| Incandescent/ Halogen | 5 W ² | 500 W | 400 W | 300 W | Optional ¹ | Either |
| Dimmable Fluorescent Ballast | 1 ballast | 3.3 A (400 VA) | No Derating Required | | Required | Forward |
| Hi-lume 1% 2-wire (LTE) LED Driver | 1 driver | 3.3 A (400 W) 20 drivers max. | No Derating Required | | Required | Forward |
| PHPM-PA/3F and GRX-TVI ³ | 1 interface | 3 interfaces | No Derating Required | | Required | Forward |

¹ Neutral is recommended for best dimming performance, if available, but is not required for this load type.

² Minimum load shown is for neutral connected operation. If no neutral is used, minimum load is 2 bulbs LED/CFL, or 25 W Incandescent/Halogen.




³ Power Boosters / Load Interfaces: -HQRD-PRO can be used to control power boosters / load interfaces. For a list of compatible power boosters / load interfaces see **Compatible Power Boosters and Load Interfaces**, page 10.

Note: For dimming MLV fixtures, the maximum lamp wattage is typically 70%–85% of the transformer's VA rating. For actual transformer efficiency, contact the manufacturer. The total VA rating of the transformer(s) shall not exceed the VA rating of the dimmer.

HomeWorks Designer RF Maestro Local Controls

Load Type and Capacity (continued)

Do not remove outside fins on ends of ganged controls (shaded areas below).

| -8ANS, -8S-DV, -RD-277, and -RS-277 have fins that need to be removed for multigang installations. | |  |  |  | |
|----------------------------------------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------|
| Load Type | Minimum Load | A Not Ganged | B End of Gang | C Middle of Gang | Neutral Connection |
| HQRD-F6AN-DV ^{1,2,3} | | | | | |
| Fluorescent/LED Drivers | 0.05 A | 6 A | 5 A | 3.5 A | Yes |
| | 1 ballast | 60 ballasts | 50 ballasts | 35 ballasts | |
| HQRD-2ANF ⁴ | | | | | |
| Ceiling Fan | 0.083 A | 2 A | 2 A | 2 A | Yes |
| HQRD-8ANS ^{1,5} | | | | | |
| Lighting | 10 W | 8 A | 6.5 A | 5 A | Yes |
| Motor | 0.08 A | 1/4 HP 5.8 A | 1/4 HP 5.8 A | 1/6 HP 4.4 A | |
| HQRD-8S-DV ^{5,6} | | | | | |
| Lighting | 40 W/VA | 8 A | 8 A (2-gang); 7 A (3-gang) | 7 A | No |
| Motor | 0.4 A | 1/10 HP 3 A | | | |

Note: Do not install dimmers to control receptacles or motor-operated appliances.

¹ Power Boosters/Load Interfaces: -F6AN-DV and -8ANS can be used to control power boosters / load interfaces. For a list of compatible power boosters/load interfaces see **Compatible Power Boosters and Load Interfaces**, page 10.

² Fluorescent Dimmer Load Type: -F6AN-DV: designed for use with permanently installed 3-wire 120 V~ or 277 V~ line voltage control fluorescent ballasts or LED drivers. Use with only Hi-lume, Hi-lume 3D, Hi-Lume Compact SE, Eco-10, or EcoSystem (H3D-, FDB-, ECO-, HL3-, EC5-, L3D). Do NOT use with any other ballasts or drivers. Do not install to control receptacles or motor-operated appliances.

³ Maximum Load: The maximum load for the -F6AN-DV is either the derated load or the number of ballasts, whichever is LESS.

⁴ Ceiling Fan Application: -2ANF

- Use to control one paddle-type ceiling fan (permanent split-capacitor).
- Use the ceiling fan's pull chain to set its speed to the highest setting.
- Do not use to control fans that use shaded-pole motors (e.g., bath exhaust fans).
- Do not use to control fans that have integrated fan speed controls (e.g., fans that have a remote control), unless the integrated control is removed from the ceiling fan.
- Do not connect to any other motor-operated appliance or to any lighting load type.
- Do not use to control a fan lighting load (e.g., light kit).

⁵ Switch Load Type:

- -8ANS and -8S-DV: designed for use with permanently installed 120 V~ incandescent, magnetic low-voltage, electronic low-voltage, tungsten halogen, fluorescent, CFL, LED, or motor loads.

- -8S-DV can also be used with permanently installed 277 V~ magnetic low-voltage or fluorescent loads.

⁶ Shunt Capacitor: Some -8S-DV installations may require the use of a shunt capacitor; this is especially necessary for load types sensitive to leakage current (e.g., fluorescent ballasts). If load flickers, install a shunt capacitor. Optional shunt capacitor must be installed inside the load fixture or in a separate J-box. For shunt capacitor installation see Wiring Diagram 4, 9, or 10.

HomeWorks Designer RF Maestro Local Controls

Compatible Power Boosters and Load Interfaces

Some local controls can be used to control power boosters or load interfaces. Up to three power boosters or load interfaces can be used with one control. See table below for a list of controls and compatible power boosters and load interfaces.


| Control | Phase Adaptive Power Modules: PHPM-PA-120-WH; PHPM-PA-DV-WH | 3-wire Fluorescent Power Modules: PHPM-3F-120-WH; PHPM-3F-DV-WH | Switched Power Module: PHPM-SW-DV-WH | 0–10 V $\overline{\sim}$ Interface and Switching Module: GRX-TVI |
|---------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------|------------------------------------------------------------------|
| HQRD-6ND | ✓ | ✓ | | ✓ |
| HQRD-10ND | ✓ | ✓ | | ✓ |
| HQRD-6NA | ✓ | ✓ | | ✓ |
| HQRD-F6AN-DV ¹ | ✓ | ✓ | | ✓ |
| HQRD-8ANS | | | ✓ | |
| HQRD-PRO | ✓ | ✓ | | ✓ |

¹ Only the GRX-TVI is compatible with the HQRD-F6AN-DV at 277 V $\overline{\sim}$. All other power modules are 120 V $\overline{\sim}$ only.


HomeWorks Designer RF Maestro Local Controls

Operation


Dimmer

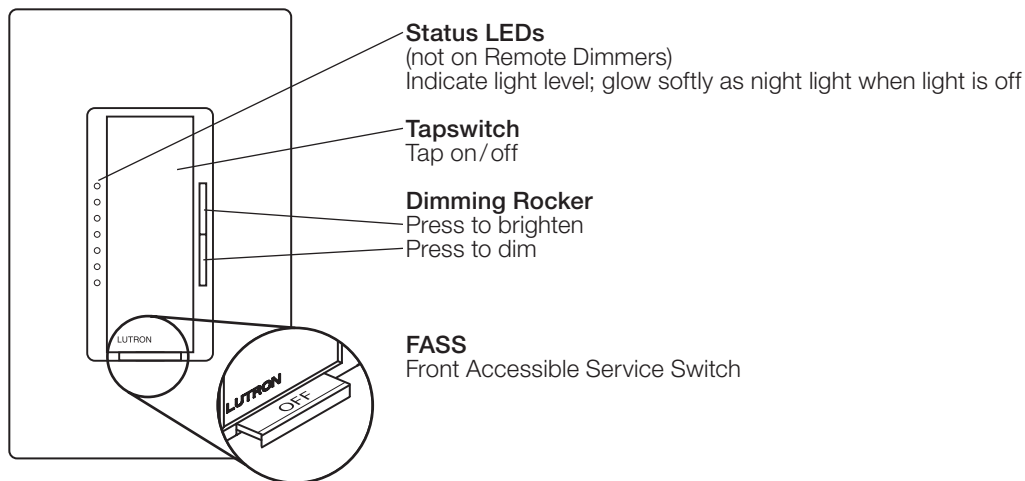

Switch

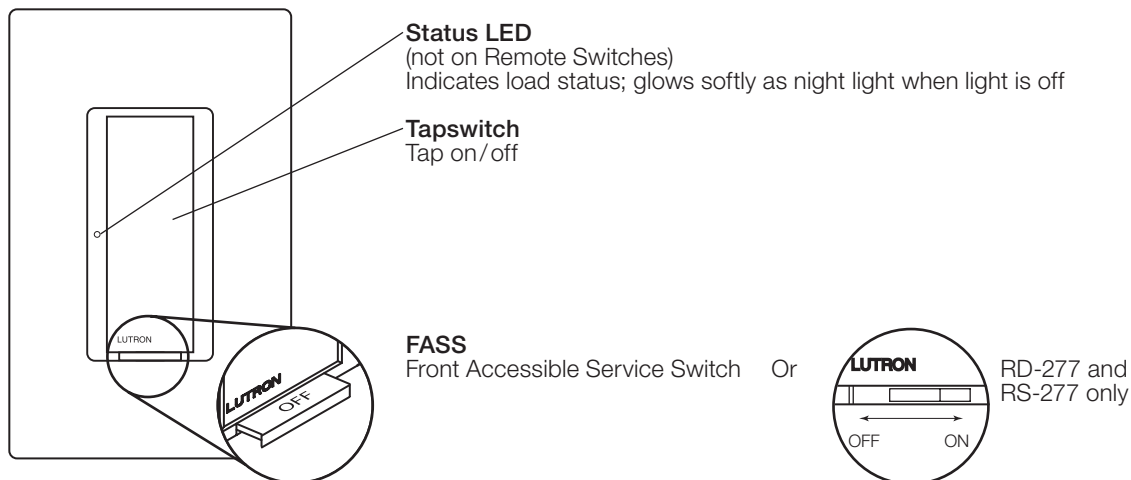

Fan Speed Control

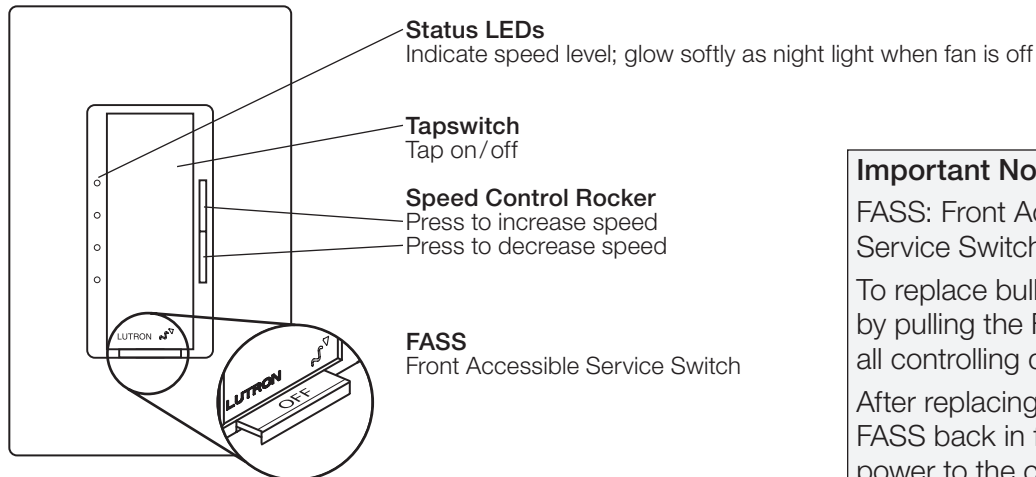

Important Notice

FASS: Front Accessible Service Switch

To replace bulb, remove power by pulling the FASS out fully on all controlling devices.

After replacing bulb(s), push the FASS back in fully to restore power to the control(s).


HomeWorks Designer RF Maestro Local Controls

Wiring Diagrams

Wiring Diagram 1

Single-Location Installation without Neutral¹


-6CL, -6D, -10D, -PRO

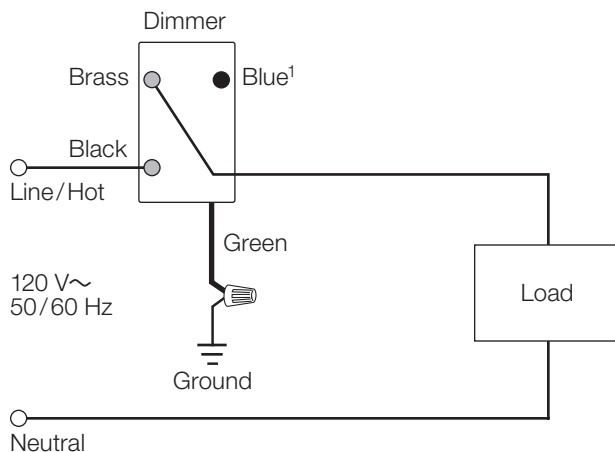

Wiring Diagram 2

Single-Location Installation with Neutral¹


-6ND, -10ND, -6NA, -2ANF, -8ANS, -PRO

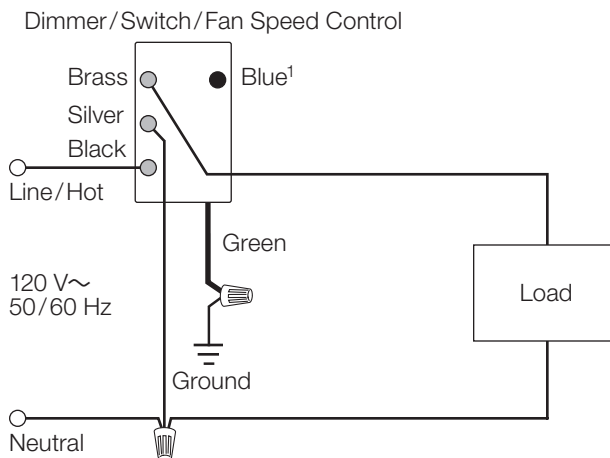

Wiring Diagram 3

Single-Location Fluorescent Dimmer Installation¹


-F6AN-DV with Lutron Ballast/LED Driver

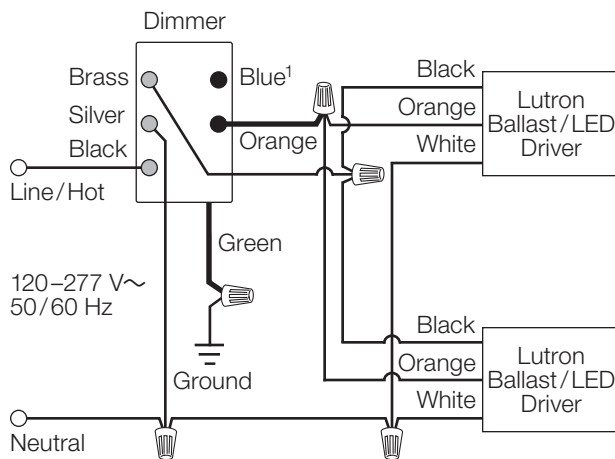

Wiring Diagram 4

Single-Location 2-Wire Switch Installation¹

-8S-DV with Optional Shunt Capacitor²

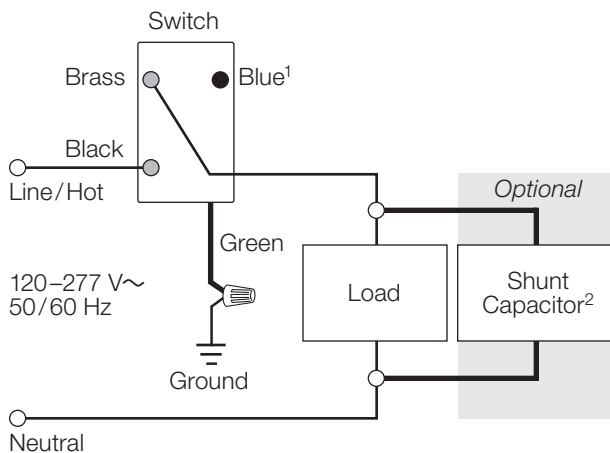

Note: Bolded lines in diagrams indicate leads on products.

¹ When using controls in single-location installations, tighten the blue terminal. Do not connect the blue terminal to any other wiring or to ground.

² Optional Shunt Capacitor must be installed inside the load fixture or in a separate J-box.

Continued on next page...


HomeWorks Designer RF Maestro Local Controls

Wiring Diagrams (continued)

Wiring Diagram 5

Multi-Location Installation without Neutral¹


-6CL, -6D, -10D, and -PRO with HQD-RD

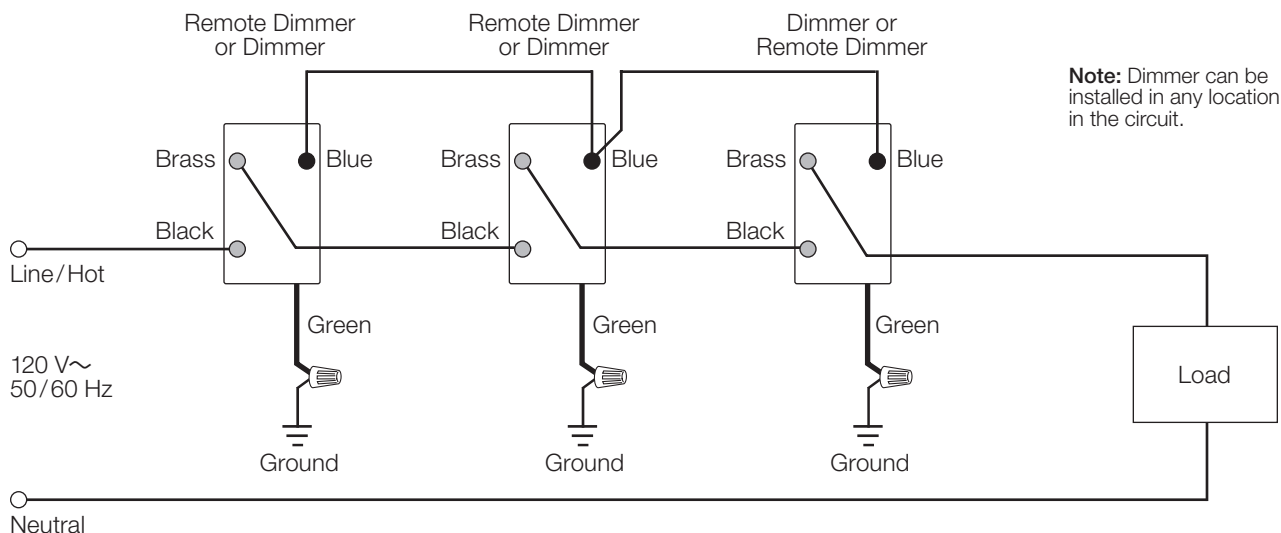

Wiring Diagram 6

Multi-Location Installation with Neutral^{1,2}

-6ND, -10ND, -6NA, -2ANF and -PRO with HQD-RD; -8ANS with HQD-RS

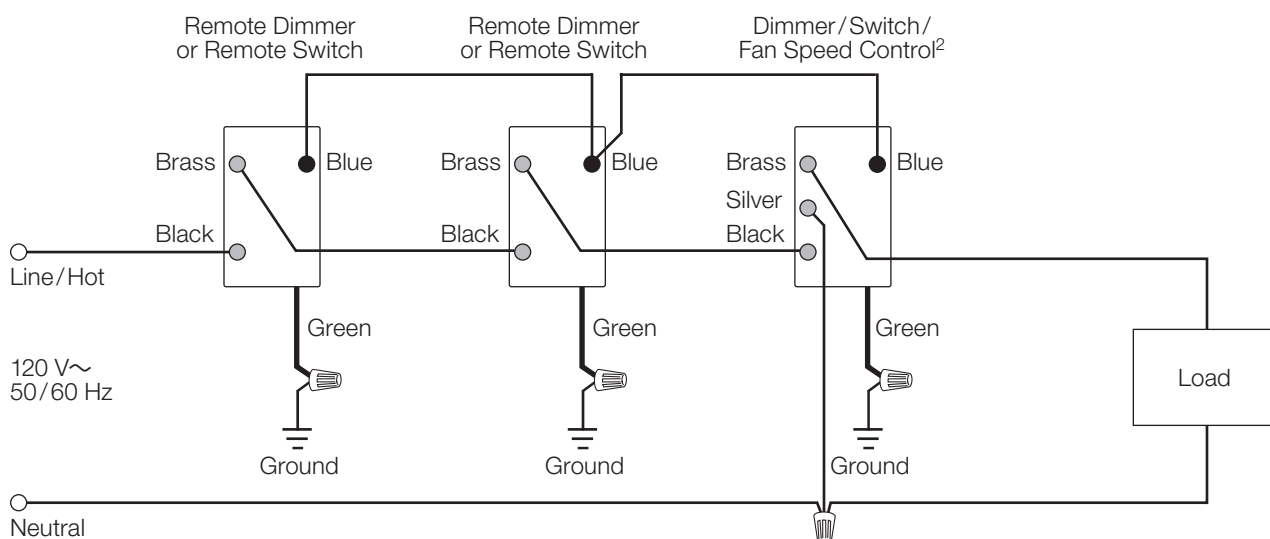

- ¹ Up to 9 Remote Dimmers/Remote Switches may be connected to the Dimmer/Switch/Fan Speed Controls. Total blue terminal wire length may be up to 250 ft (76 m), except -PRO which is up to 150 ft (45 m).
- ² Neutral-Wire Dimmers/Switches/Fan Speed Controls must be connected on the Load side of a multi-location installation, except the -PRO which can be connected in any position.

Continued on next page...


HomeWorks Designer RF Maestro Local Controls

Wiring Diagrams (continued)

Wiring Diagram 7

Multi-Location Fluorescent Dimmer Installation^{1,2} (120 V~)


-F6AN with HQD-RD and Lutron Ballast / LED Driver

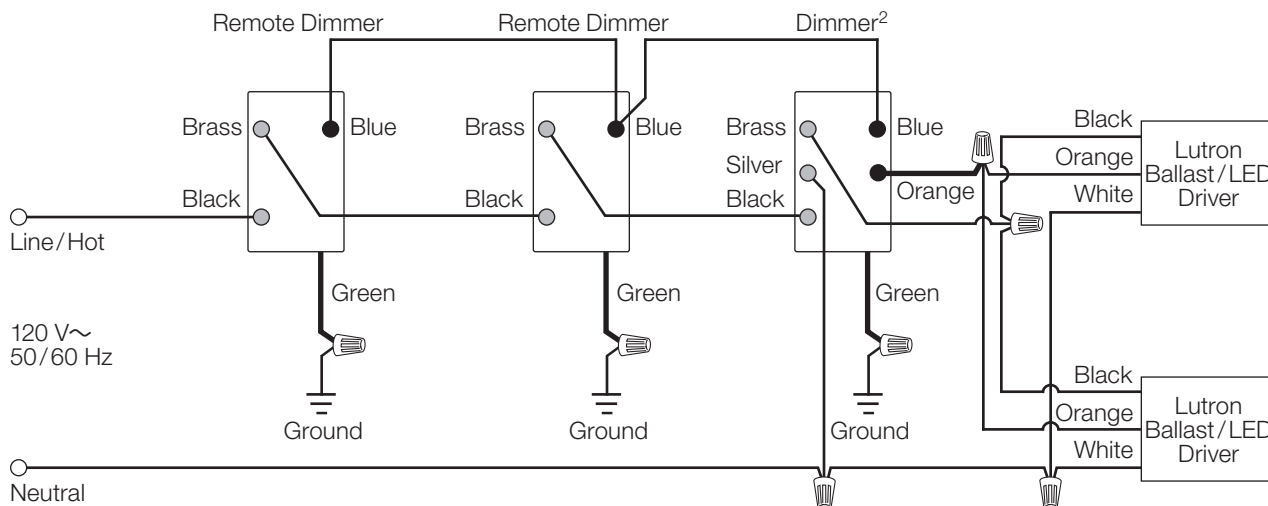

Wiring Diagram 8

Multi-Location Fluorescent Dimmer Installation^{1,2} (277 V~)

-F6AN with HQD-RD-277 and Lutron Ballast / LED Driver

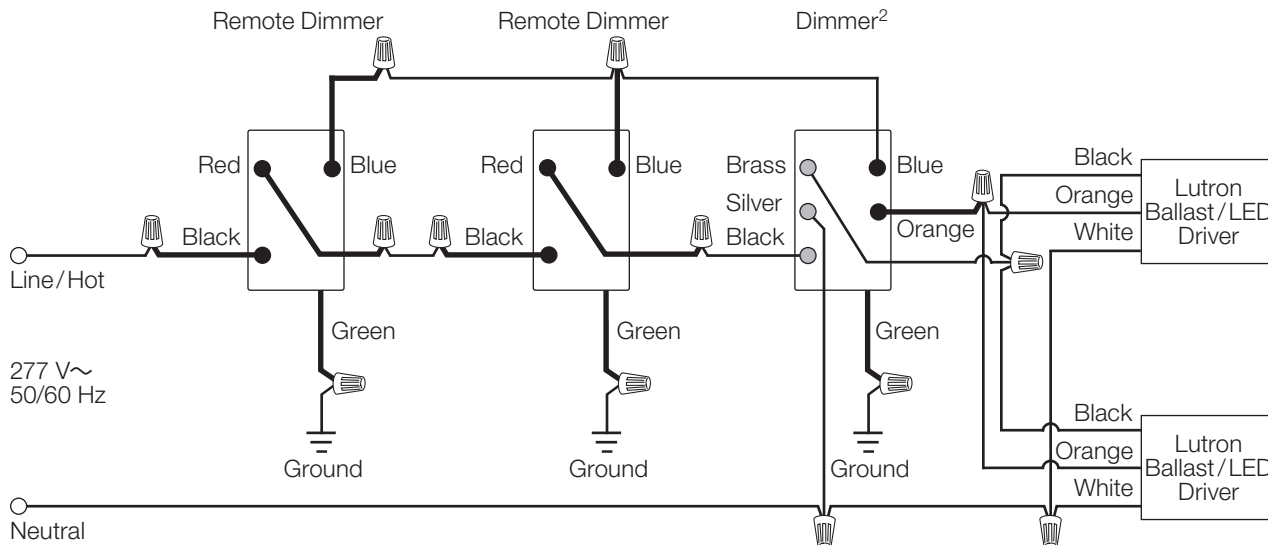

Note: Bolded lines in diagrams indicate leads on products.

- ¹ Up to 9 Remote Dimmers/Remote Switches may be connected to the Dimmer/Switch/Fan Speed Controls. Total blue terminal wire length may be up to 250 ft (76 m), except for -PRO, which is up to 150ft (45 m).
- ² Neutral-Wire Dimmers/Switches/Fan Speed Controls must be connected on the Load side of a multi-location installation, except the -PRO, which can be connected in any position.

Continued on next page...


HomeWorks Designer RF Maestro Local Controls

Wiring Diagrams (continued)

Wiring Diagram 9

Multi-Location 2-Wire Switch Installation¹ (120 V~)


-8S-DV with HQD-RS and Optional Shunt Capacitor

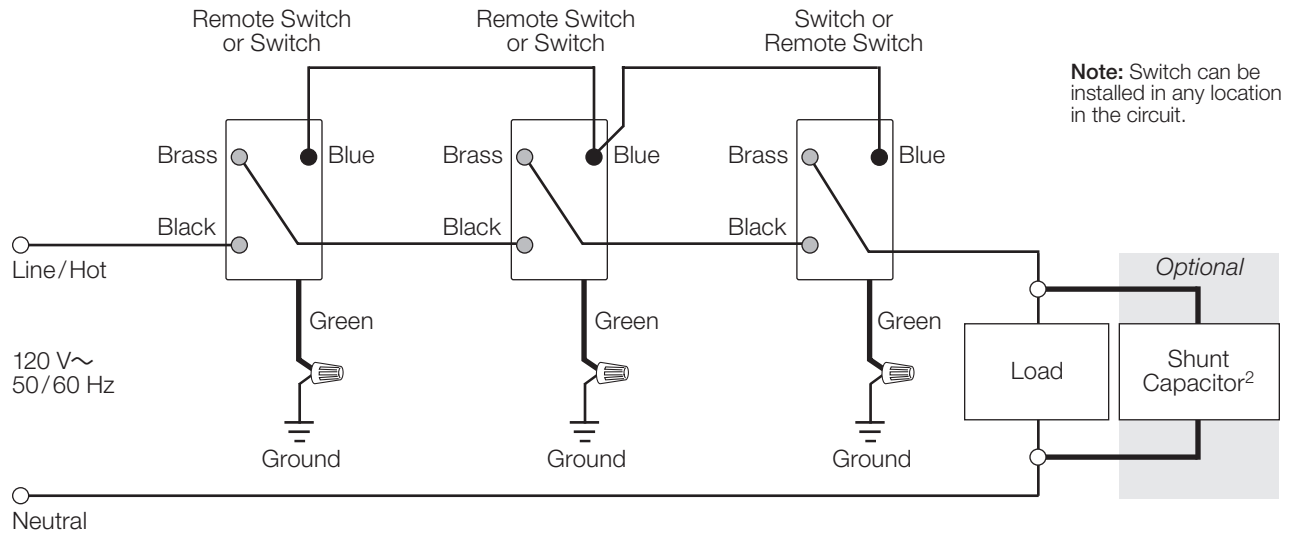

Wiring Diagram 10

Multi-Location 2-Wire Switch Installation¹ (277 V~)

-8S-DV with HQD-RS-277 and Optional Shunt Capacitor

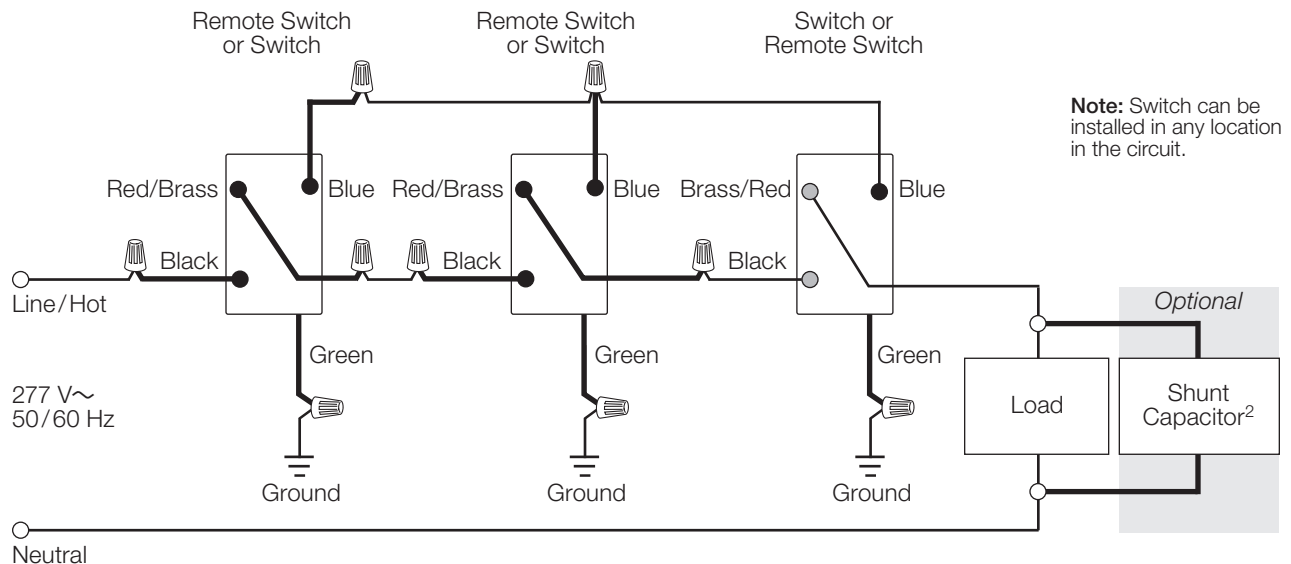

Note: Bolded lines in diagrams indicate leads on products.

¹ Up to 9 Remote Dimmers/Remote Switches may be connected to the Dimmer/Switch/Fan Speed Controls. Total blue terminal wire length may be up to 250 ft (76 m), except for -PRO which is 150 ft (45 m).

² Optional Shunt Capacitor must be installed inside the load fixture or in a separate J-box. Shunt capacitor (LUT-MLC) is included with 8S-DV.


HomeWorks Designer RF Maestro Local Controls

Colors and Finishes

Gloss Finishes



White
WH



Ivory
IV



Almond
AL



Light Almond
LA



Gray
GR




Brown
BR



Black
BL


Satin Finishes




Snow
SW



Midnight
MN



Taupe
TP



Biscuit
BI



Eggshell
ES



Palladium
PD



Hot
HT




Merlot
MR




Plum
PL



Sienna
SI




Terracotta
TC




Bluestone
BG




Greenbriar
GB



Goldstone
GS



Mocha Stone
MS



Stone
ST



Desert Stone
DS



Limestone
LS

- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- Color chip keychains are available for more precise color matching:
Gloss Finishes: DG-CK-1
Satin Finishes: SC-CK-1

For the latest color offerings see our website:
<http://www.lutron.com/satincolors>

Metal Finish (wallplate only)



Stainless Steel
SS

When using Stainless Steel wallplates, it is recommended that you order the control in Midnight (MN).

Lutron, Claro, Hi-Lume Compact SE, Eco-10, EcoSystem, FASS, Hi-Lume, HomeWorks, Maestro, and Satin Colors are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.
All other product names, logos, and brands are property of their respective owners.