
Submitted Model No.:	
Specific Features:	



▲ Designate proper finish suffix

Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

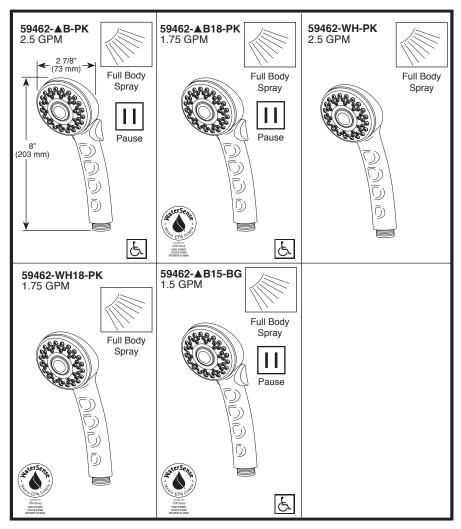

see what Delta can do

# **HAND SHOWER**

### **FEATURES:**

■ Touch-Clean® Nozzles

## STANDARD SPECIFICATIONS:

- Maximum 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa (59462-AB-PK, 59462-WH-PK)
- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa (59462-AB18-PK, 59462-WH18-PK)
- Maximum 1.5 gpm @ 80 psi, 5.7 L/min @ 550 kPa (59462-▲B15-PK)
- Pause flow by pressing the button on the handle pause is a non-positive shut-off (59462-B-PK, 59462-B18-PK, 59462-B15-BG)
- Certified dual check valves for backflow protection
- ADA compliant hand shower when installed per accessibility quidelines of the act

### **WARRANTY**

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5
  years from the date of purchase; or for commercial
  purchasers, 1 year from the date of purchase. No
  warranty is provided on batteries.



# **COMPLIES WITH:**

**Delta Faucet Company** 

- ASME A112.18.1/CSA B125.1 ◆
- ASME A112.18.3
- Indicates compliance to ICC/ANSI A117.1 Applies to 59462-▲B-PK, 59462-▲B18-PK and 59462-▲B15-BG only
- EPA WaterSense<sup>®</sup> Applies to 59462-▲B18-PK, 59462-WH18-PK, and 59462-▲B15-BG only