


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	12/31/09	AM

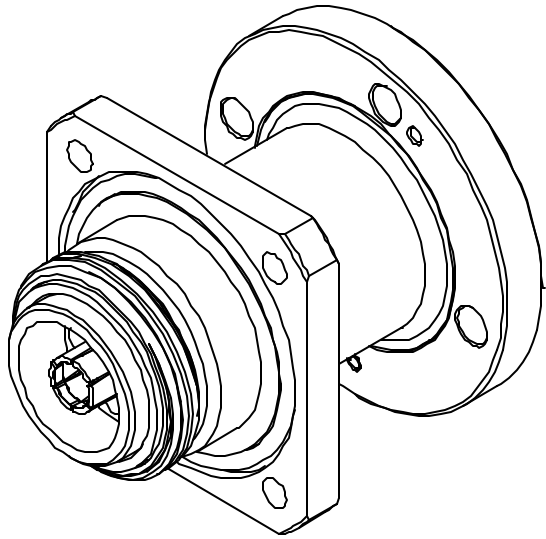

ENGINEERING DATA:

ELECTRICAL:

IMPEDANCE: 50 OHMS NOMINAL

INTERFACE:

1-5/8 EIA: PER EIA RS-225 AND MIL-DTL-24044

13-30(f): PER IEC 60169-5

MATERIAL:

BODY & COUPLING RING: BRASS

CENTER CONTACTS: BRASS & BERYLLIUM COPPER

O-RING & GASKET: SILCONE RUBBER

INSULATORS: TEFLON

SCREW, ALIGNMENT PIN & LOCKWASHER: STEEL

SNAP RING: PHOSPHOR BRONZE

FINISH:



BODY & COUPLING RING: NICKEL PLATED


CENTER CONTACTS: SILVER PLATED

SCREW & LOCKWASHER: PASSIVATED

NOTES:

1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE REFERENCE ONLY.

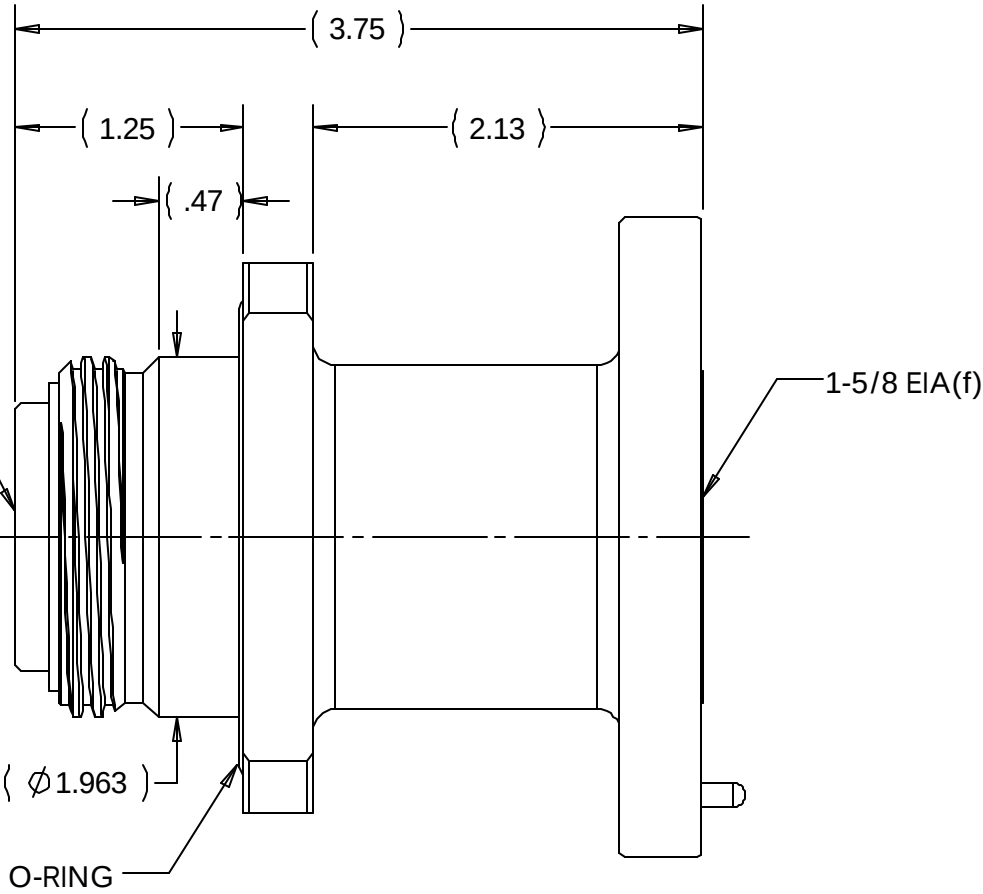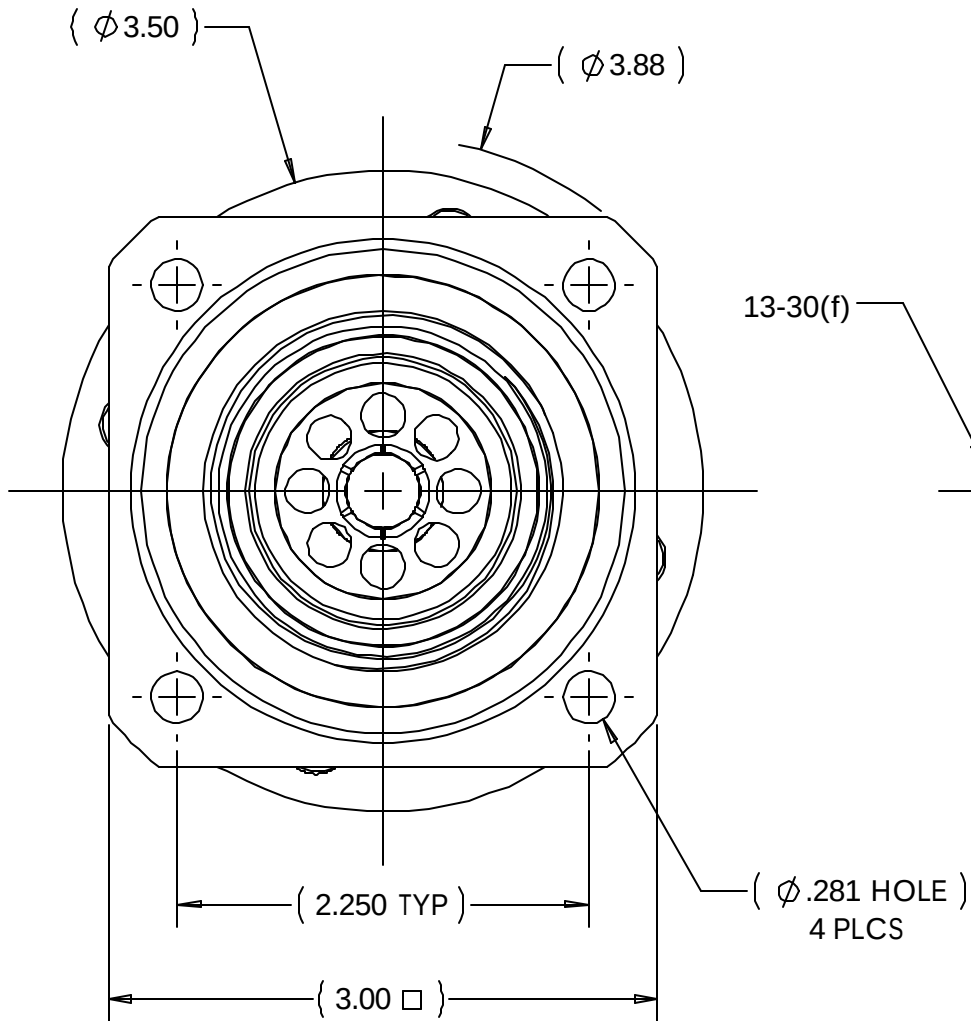

MATERIAL	DO NOT SCALE DRAWING		DRAWN MVC	DATE 12/29/09	 TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™ TITLE: CONNECTOR, COAXIAL, RF 13-30(f) to 1-5/8 EIA(f) ADAPTER			
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ±1/64 .XX ±.01 .XXX ±.005 ANGLES: ±1/2` MACHINED SURFACES: 63/✓		ENG APPR. AM	DATE 12/31/09				
			MFG APPR.	DATE				
			OTHER APPR.	DATE				
COMMENTS:			THIRD ANGLE PROJECTION 		SIZE B	DWG. NO. TRU-11443		REV -
					CAGE CODE: 92180		SCALE: 1:1	SHEET 1 OF 1
surface area: sq inch		weight: lbs						