


DWG. NO.		360-974-0630H	
REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ECR 7405	7/10/02	9/14

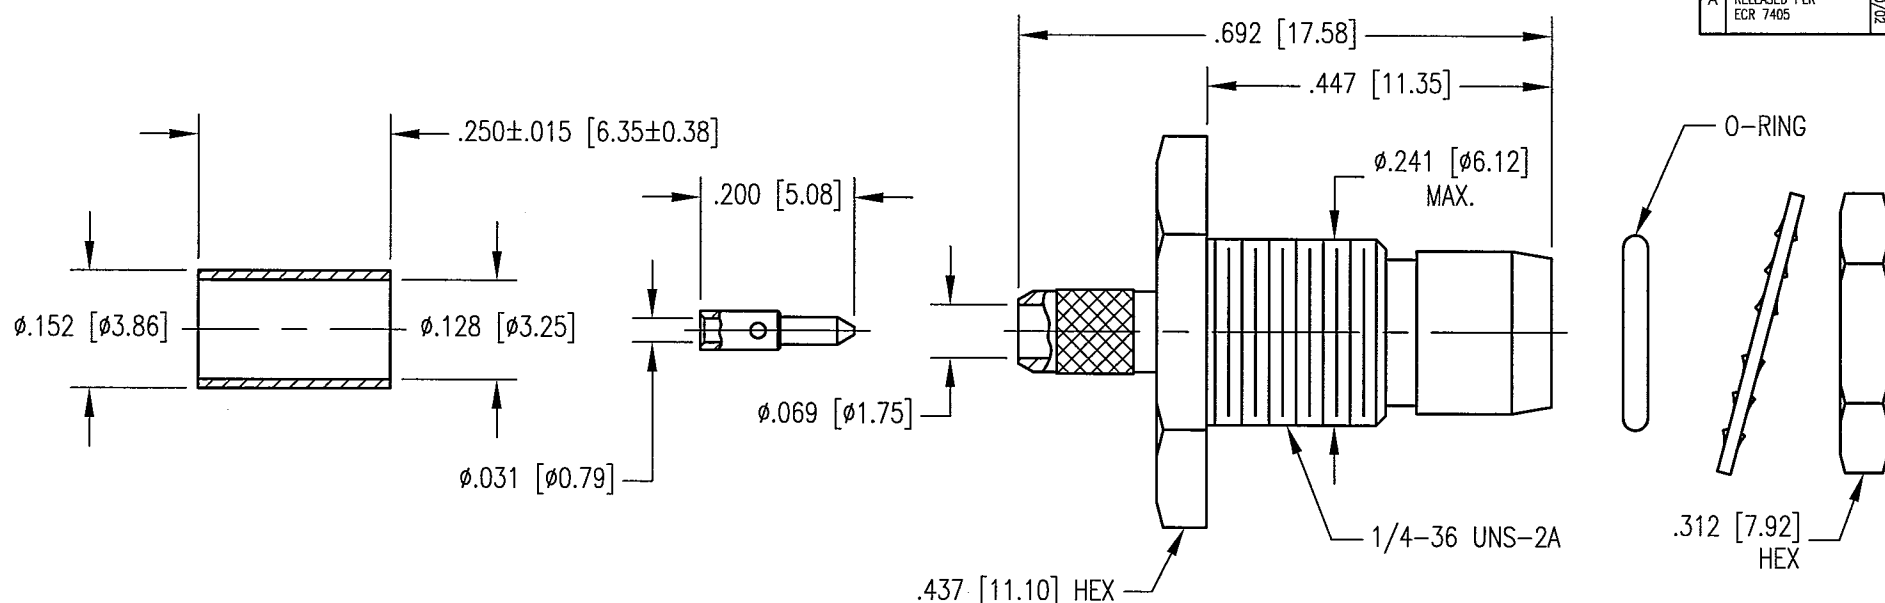

NOTES:

1. MATERIALS:

FRONT CONTACT: COPPER ALLOY
 LOCKWASHER: PHOSPHOR BRONZE PER ASTM B103
 ALL OTHER METAL PARTS: BRASS PER ASTM B16
 INSULATOR: TEFLON PER ASTM D1710
 O-RING: SILICONE RUBBER PER ZZ-R-765

2. FINISH:


CENTER CONTACTS: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 ALL OTHER METAL PARTS: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH RG-316 CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 9-11 WITH TRIMMING DIMENSIONS SHOWN.

5. CRIMP FERRULE USING .128 HEX DIE.

RECOMMENDED MOUNTING HOLE

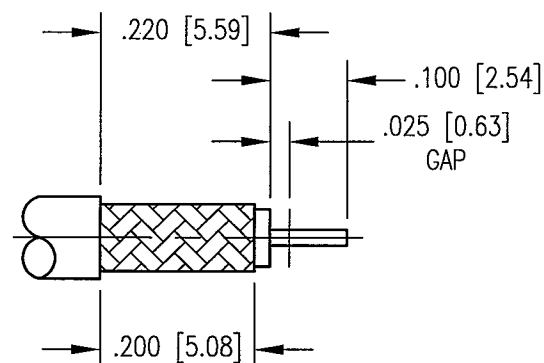

CABLE TRIMMING DIMENSIONS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]		NORTHROP GRUMMAN	
TOLERANCES:		Winchester Electronics 400 Park Road Watertown, CT 06795	
DECIMALS .XX ± .01 [0.254]		TITLE	
XXX ± .005 [0.127]		BMA STRAIGHT BULKHEAD PLUG	
ANGLES ± 2°	SCALE: 4:1	A 360-974-0630H	
DRAWN JED	DATE 7/10/02	SHT. 1	OF 1
APPROVED 9/14	DATE 7/15/02	REV. A	