



NOTE

- **DO NOT** connect low-voltage LED tape light to high-voltage power.
- Power Supply **cannot be dimmed** on the 120V AC side.
- For wireless switching, use low voltage controls on the 12V DC controls on the Power Supply (see pages 24-45)
- Install in an accessible, well-ventilated area such as sink base or on top of cabinet. For best operation, do not locate in an attic or other area of high ambient temperature.

Tools Needed

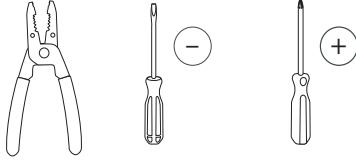


Product Legend

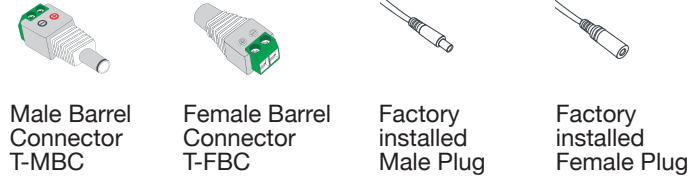


Plug-In Power Supply to Puck Light

Provide receptacle for Plug-in Power Supply or use existing outlet behind the microwave, refrigerator, dishwasher, or under the sink. If using our in-line low voltage switches, sensors, or Wireless Control systems, see instructions packaged with the components.

Direct Connection

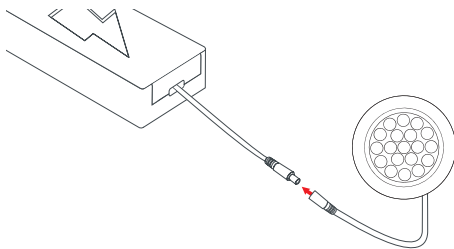


2. Insert Male Plug on power supply into Female Plug on Puck Light.




3. Plug power supply into switched outlet and turn on Puck Light.


Remote Connection




2. Cut length of wire to run from Power Supply to the installation location of the LED Puck Light. Strip 1/4" from both ends of wire, twist, and fold stripped wire section in half.




3. Insert one end of stripped wires into the terminals of a Female Barrel Connector, Red wire to (+), Black wire to (-), tighten screws. Repeat process with the other end of the wire and a Male Barrel Connector.

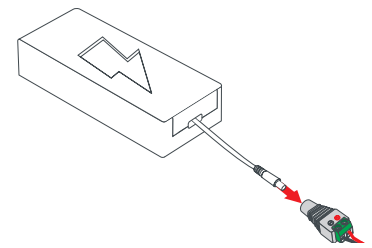

4. Insert Male Plug on power supply into Female Barrel Connector.

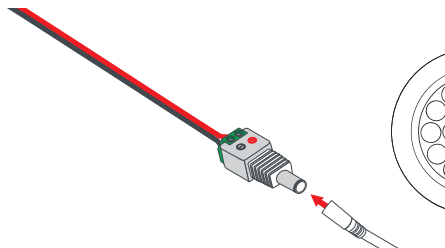

5. Insert Male Barrel Connector into Female Plug on puck light.



6. Plug power supply into a switched outlet and turn on puck light.