



BM120V30ATY | 3-PHASE MODULAR UPS BATTERY MODULE

Extend battery runtime or replace existing battery modules

CyberPower BM120V30ATY 3-Phase Modular UPS Battery Modules contain ten (10) 12VDC 9Ah batteries. Two of these 120VDC modules fill one shelf of a battery cabinet equaling one full 240VDC battery string. Includes a One-Year Limited Warranty. For CyberPower 3-Phase Modular UPS Battery Cabinets, 3-Layer BCT3L9N125, 6-Layer BCT6L9N225.



ELIGIBLE MODELS

- SM020KAMFA
- SM040KAMFA

RELATED ACCESSORIES

- BCT3L9N125
- BCT6L9N225

FEATURES


- Hot-swappable: Yes
- Voltage: 120V DC
- Battery Type: VRLA
- Warranty: One-Year

SPECIFICATIONS

| BATTERY | |
|---------------------------|-------------|
| Battery Size | 12 V / 9 Ah |
| Battery Type | VRLA |
| Hot-Swappable | Yes |
| OUTPUT | |
| Nominal Output Voltage | 120 VAC |
| PHYSICAL | |
| Color | Silver |
| Form Factor | Modular |
| Material of Construction | Metal |
| POWER MODULE | |
| Power Module - Rack Units | 3U |

| PHYSICAL DIMENSIONS | |
|--|---------------------------|
| Physical Dimensions - Width/Height/Depth (cm) | 23.62 x 11.68 x 60.96 cm |
| Physical Dimensions - Width/Height/Depth (mm) | 236 x 117 x 610 mm |
| Physical Dimensions - Width/Height/Depth (in.) | 9.3 x 4.60 x 24 in. |
| Weight (kg) | 33.61 kg |
| Weight (lb) | 74.1 lb. |
| SHIPPING DIMENSIONS | |
| Shipping Dimensions - Width/Height/Depth (cm) | 33.66 x 23.19 x 78.74 cm |
| Shipping Dimensions - Width/Height/Depth (mm) | 336.55 x 231.9 x 787.4 mm |
| Shipping Dimensions - Width/Height/Depth (in) | 13.25 x 9.13 x 31 in. |
| Shipping Weight (kg) | 34.52 kg |
| Shipping Weight (lbs.) | 76.1 lb. |

BM120V30ATY
3-PHASE MODULAR UPS
BATTERY MODULE

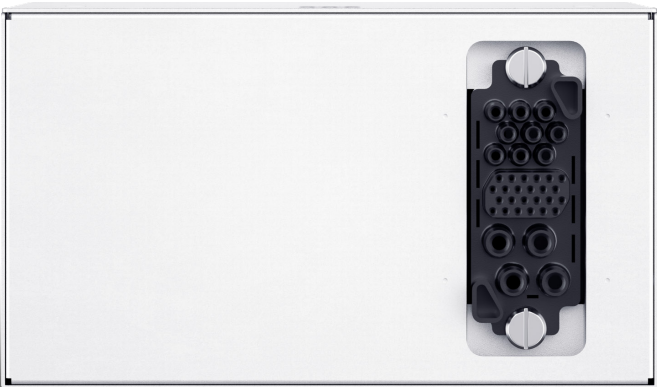

SPECIFICATIONS CONT.

| ENVIRONMENTAL | |
|-----------------------------|-----------------------------|
| Operating Elevation | 0 - 10,000 ft (0 - 3,048 m) |
| Operating Relative Humidity | 0 - 95 % (non-condensing) |
| Operating Temperature | 32 - 104°F (0 - 40°C) |
| Storage Relative Humidity | 0 - 95% (non-condensing) |
| Storage Temperature | 5 - 104 °F (-15 - 40 °C) |

| CERTIFICATIONS | |
|------------------|--|
| Environmental | RoHS Compliant |
| Safety | cTUVus UL1778, CSA C22.2 No. 107.3-14 CFR 47 FCC Part 15, Subpart B, Class A |
| WARRANTY | |
| Product Warranty | One-Year Limited Warranty |