
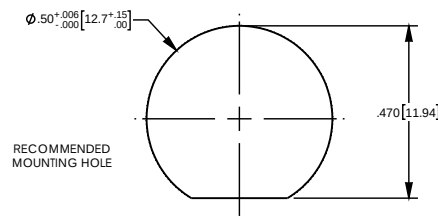




- NOTES: UNLESS OTHERWISE SPECIFIED
1. MATERIAL SPECIFICATIONS:
CONTACT: BERYLLIUM COPPER
FRONT AND REAR INSULATOR: PTFE
OUTER INSULATOR: DELRIN
ALL OTHER METAL PARTS: BRASS
 2. FINISH SPECIFICATIONS:
CONTACT: .000003 MIN GOLD OVER .000050 MIN NICKEL
ALL OTHER METAL PARTS: .000100 MIN NICKEL OVER .000050 MIN COPPER
 3. ELECTRICAL SPECIFICATIONS:
IMPEDANCE: 75 OHMS
FREQUENCY RANGE: DC - 12.0 GHz
 4. COMPLIANT TO 3G/6G/12G-SDI SMPTE REQUIREMENTS.
 5. HEX NUT AND LOCK WASHER SHIPPED LOOSE.

REV	DESCRIPTION	BY	APPD
B	ER064315	9/7/07/BD	BYN

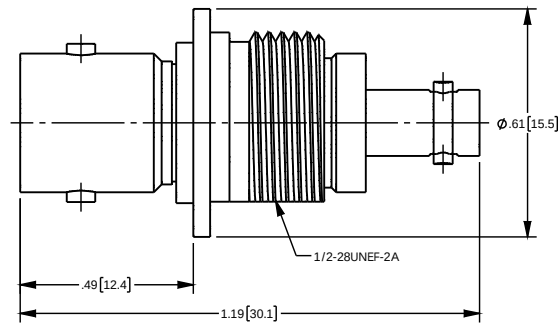

CATALOG P/N: HHDBNCJ-BNCJ-IG

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM) TOLERANCES DECIMAL: XX [X.X] ± .01 [0.3] XXX [X.XX] ± .005 [0.13] XXXX [X.XXX] ± .0005 ANGLES: ± 2° SCALE: 3:1				BOMAR by WINCHESTER Winchester Electronics Corporation 199 Park Road Ext Suite 104 Middletown, Connecticut 06762			
CUSTOMER SALES DRAWING				HD-BNC JACK TO BNC JACK ISOLATED GROUND (RHS)			
DRAWN JH	DATE 08/16/2010	APPROVED JH	DATE 08/16/2010				
APPROVED MAR	DATE 08/16/16	APPROVED XXX	DATE XX/XX/XX				
A				SDHHDBNCJ-BNCJ-IG	SHF	OF	REV B
				1	1		