

NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SDHHD-0000.

2. MATERIAL AND FINISHES:

BODY : BRASS, GOLD PLATE

NUT : BRASS, NICKEL PLATE

CONTACT: BERYLLIUM COPPER, GOLD PLATE

INSULATOR: PTFE, NATURAL

3. ELECTRICAL SPECIFICATIONS:

IMPEDANCE: 75 OHMS

FREQUENCY RANGE: DC-6.0 GHz

4. MECHANICAL:



DURABILITY: 500 CYCLES MIN

5. PACKAGING:



INDIVIDUALLY BAGGED

6. COMPLIANT TO SMPTE 424M (3G-SDI) SPECIFICATION.

REV	DESCRIPTION	BY DATE	APPD
C	ER056530	MS 01/27/15	MAR

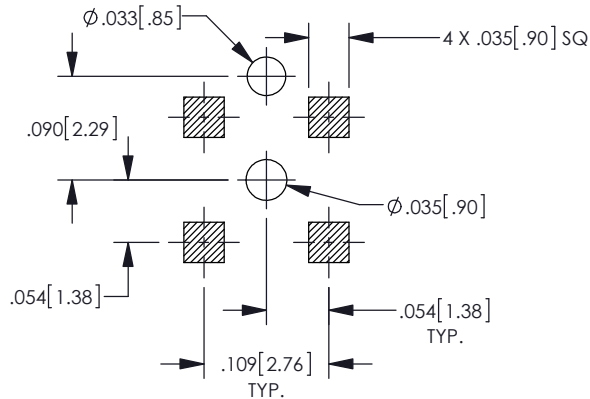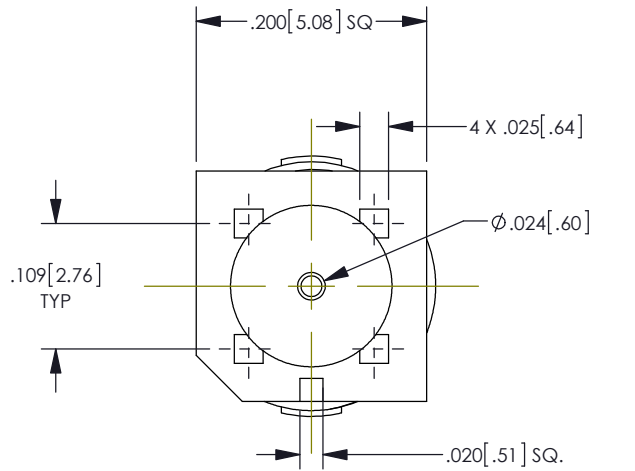

RECOMMENDED MOUNTING HOLES

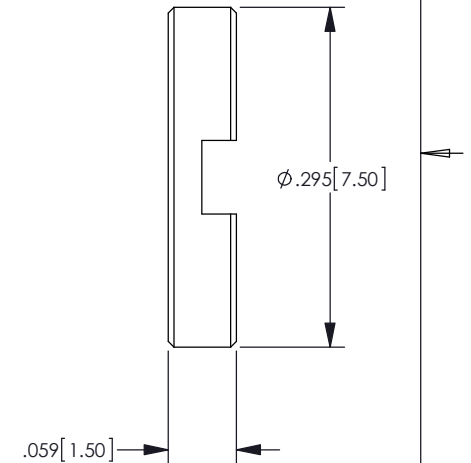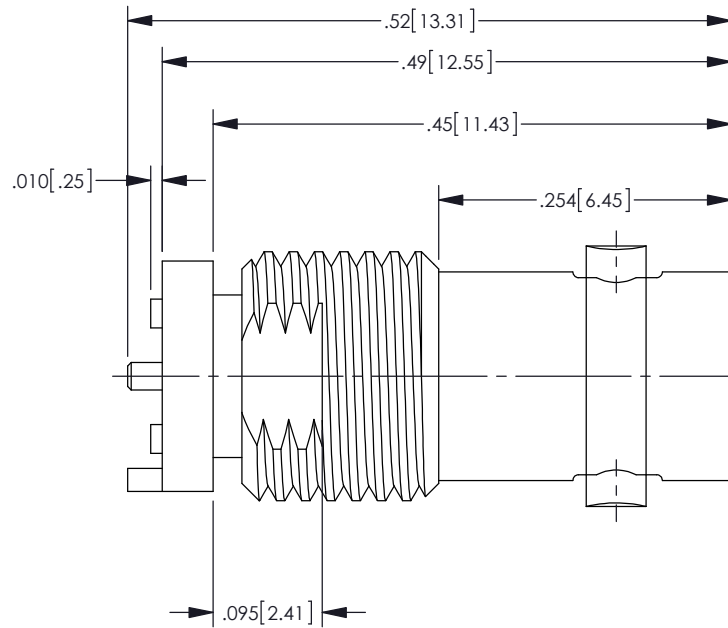

CATALOG P/N: HHD361A715-SM

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .0005 [0.013] ANGLES: ± 2° SCALE: X:X			
CUSTOMER SALES DRAWING		THIRD ANGLE	
DRAWN MS	DATE 01/27/15	APPROVED MAR	DATE 01/27/15
APPROVED XXX	DATE XX/XX/XX	APPROVED XXX	DATE XX/XX/XX

KINGS®
by WINCHESTER
ELECTRONICS
Winchester Electronics Corporation
199 Park Road Ext Suite 104
Middlebury, Connecticut 06762

HD-BNC SURFACE MOUNT JACK

A	HHD361A715-SM	SHT	OF	REV
		1	1	C