


## ERI-Q10x-Px

### Value Express NVR

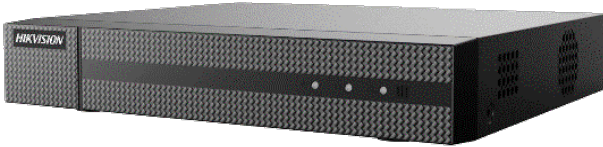

- Up to 4 MP Resolution Recording
- Up to 4 or 8 Cameras can be Connected
- H.265+/H.265/H.264+/H.264/MPEG Compression
- Plug and Play with up to 4 or 8 Independent PoE Cameras
- Up to 4 or 8 PoE Network Connections
- One SATA Interface
- Up to 6 TB Hard Drive Capacity

Value Express ERI-Q10x-Px NVRs feature a video output of up to 1080p. They offer full channel recording at up to 4 MP and feature H.265+ compression technology, which improves recording efficiency and reduces data storage costs.

Plug and Play technology supports up to 4 or 8 Independent PoE cameras, depending on the model.

Additionally, ERI-Q10x-Px NVRs support basic analytics such as Smart Search and Smart Playback, and are equipped with basic line crossing and intrusion detection capabilities.

#### Available models:

ERI-Q104-P4


ERI-Q108-P8

# Specifications

	ERI-Q104-P4	ERI-Q108-P8
<b>Video Input</b>		
IP Video Input	4-ch Up to 4 MP resolution	8-ch
<b>Network</b>		
Incoming Bandwidth	40 Mbps	60 Mbps
Outgoing Bandwidth	60 Mbps	
<b>Video Output</b>		
Recording Resolution	4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF	
HDMI/VGA Output Resolution	1-ch, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
<b>Decoding</b>		
Decoding Format	H.265+/H.265/H.264+/H.264/MPEG4	
Live View/Playback Resolution	4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF	
Synchronous Playback	4-ch	8-ch
Capability	4-ch @ 1080p	
<b>Network Management</b>		
Network Protocols	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, UPnP™	
<b>Hard Disk</b>		
SATA	1 SATA interface	
Capacity	Up to 6 GB capacity for each disk	
<b>External Interface</b>		
Network Interface	1-port RJ-45 10M/100M self-adaptive Ethernet port	
USB Interface	2 x USB 2.0	
<b>PoE Interface</b>		
Interface	4-port RJ-45 10/100 Mbps self-adaptive Ethernet interface	8-port RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 36W	≤ 75W
Standard	IEEE 802.3 af/at	
<b>General</b>		
Power Supply	48 VDC	
Power	≤ 50 W	≤ 90 W
Consumption (without HDD and PoE)	≤ 10 W	
Working Temperature	14° F to 131° F (10° C to 55° C)	
Working Humidity	10 to 90%	
Chassis	1U chassis	
Dimensions (W x D x H)	10.2" x 8.9" x 1.9" (260 mm x 225 mm x 48 mm)	
Weight (without HDD)	2.2 lbs (1.0 kg)	

# Physical Interfaces

ERI-Q108-P8

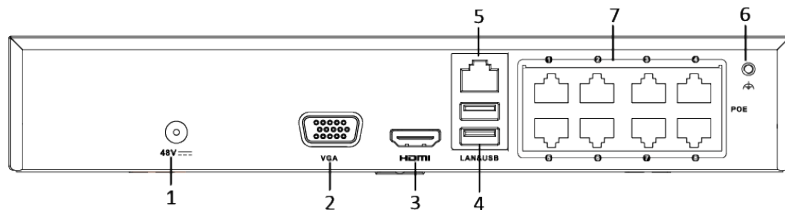

1. Power Supply	5. LAN Network Interface
2. VGA Interface	6. GND
3. HDMI Interface	7. Network Interfaces with PoE Function
4. USB Interface	

Note: The ERI-Q104-P4 has 4 network interfaces with PoE function.