



Application Tapes

Premasking and Prespacing Tape for Graphic Films

For the most current 3M Technical Information available to successfully use this product, please view this Bulletin electronically and click on the blue underlined links to view the relevant documents.

1. Table of Contents

Product Description	1
Product Line	1
Characteristics	2
3M Products Mentioned in this Bulletin	2
Warranty Information	2
Limitation of Liability	2
Health and Safety	2
Usage Recommendations	3
When to Use Premasking Tape	3
When to Use Prespacing Tape	3
Premasking Tape as An Application Aid	3
Premasking Tape in Overpaint Systems	3
Prespacing Tape for Cut Graphics	4
Printing Instructions on Application Tapes	5
Protecting Graphics During Vehicle Refinishing	5
Techniques For Applying Application Tape	5
Shelf Life, Storage, Handling	7
Bulletin Change Summary	8

2. Product Description

- An application tape is an adhesive-backed translucent material that is used as an aid in applying graphics.
- Typical uses of application tapes are:
 - to add stiffness to make application easier.
 - to protect the film from stretching during application.
 - to protect the graphic image from scratching during application.
 - to aid in the registration of cut graphic parts.
 - to protect applied graphics from damage during other operations.
- Differences between application tapes are described below.
 - Each tape has a different level of adhesion. This ensures that the tape you use has a lower adhesion to the film than the film does to the substrate.
 - Choose the recommended tape for your application to ensure easy removal. See [3M Product Bulletin AT-1](#) for details.
- Determining what type of tape to use depends on the type of graphic and the last component of the graphic construction (i.e., the top of the graphic). See [3M Product Bulletin AT-1](#) for details.

3. Product Line

- 3M™ Prespacing Tape SCPS-2
- 3M™ Prespacing Tape SCPS-53X
- 3M™ Prespacing Tape SCPS-55
- 3M™ Premasking Tape SCPM-3
- 3M™ Premasking Tape SCPM-44X

4. Characteristics

These are typical values for unprocessed product. Contact your 3M representative for a custom specification.

Characteristic	Value
Tape material	Paper
Thickness	4.5 to 5 mils (0.11 to 0.12 mm)
Adhesive type and color	Pressure sensitive, clear
Adhesion to 3M graphic film	0.39 to 0.77 pounds/inch (69 to 138 g/cm) Note: Each tape has a different adhesion, designed to work with the films, inks and graphic protection as recommended in 3M Product Bulletin AT-1 .
Tensile strength (minimum)	5 pounds/inch at 73°F (0.9 kg/cm at 23°C)
Service temperature range	Same as the film with which it is used

5. 3M Products Mentioned in this Bulletin

3M™ Scotchcal™ Graphic Films and Overlaminates
3M™ Controltac™ Graphic Films
3M™ Controltac™ Graphic Films with Comply™ Adhesive
3M™ Controltac™ Graphic Films with Comply™ v3 Adhesive
3M™ Scotchlite™ Reflective Films
3M™ Piezo Inkjet Inks
3M™ Screen Printing Inks
3M™ Scotchlite™ Screen Printing Inks
3M™ Prespacing Tapes
3M™ Premasking Tapes
3M™ Envision™ Film and Overlamine
3M™ Wrap Films 1080

6. Warranty Information

A. 3M Basic Product Warranty

The following is made in lieu of all other express or implied warranties, including any implied warranty of merchantability or fitness for a particular purpose or implied warranty arising out of a course of dealing, custom or usage of trade.

This 3M Product is warranted to be free of defects in materials and manufacture at the time of shipment and to meet the specifications stated in this Product Bulletin and as further set forth in the [3M Graphics Warranties Brochure](#).

B. Limited Remedy

3M will replace or refund the price of any 3M materials that do not meet this warranty within the specified time periods. These remedies are exclusive.

C. Additional Limitations

See the [3M Graphics Warranties Brochure](#) at 3Mgraphics.com, which gives the terms, additional limitations of the warranty, if any, and limitations of liability.

7. Limitation of Liability

Except where prohibited by law, 3M SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE TO PURCHASER OR USER FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, LABOR, NON-3M MATERIAL CHARGES, LOSS OF PROFITS, REVENUE, BUSINESS, OPPORTUNITY, OR GOODWILL) RESULTING FROM OR IN ANY WAY RELATED TO SELLER'S PRODUCTS OR SERVICES. This limitation of liability applies regardless of the legal or equitable theory under which such losses or damages are sought including breach of contract, breach of warranty, negligence, strict liability, or any other legal or equitable theory.

8. Health and Safety



CAUTION

When handling any chemical products, read the manufacturers' container labels and the Safety Data Sheets (SDS) for important health, safety and environmental information. To obtain SDS sheets for 3M products go to [3M.com/MSDS](#), or by mail or in case of an emergency, call 1-800-364-3577 or 1-651-737-6501.

When using any equipment, always follow the manufacturers' instructions for safe operation.

9. Usage Recommendations

Application tape is not required for all films or types of applications and it is specifically not recommended for certain film or applications. Refer to the most current Product and Instruction Bulletins for information on specific constructions and end use recommendations.

The type of premasking or prespacing tape to use depends on the type of graphic produced and the last component (ink, overlamine or clear) that was applied to the graphic construction (i.e., the top of the graphic).

Important Note!

Refer to [3M Instruction Bulletin AT-1](#) for recommended Premasking Tapes and Prespacing Tapes specific to films.

A. When to Use Premasking Tape

- Use as an application aid to increase stiffness, and prevent stretching and damage during application (see Premasking Tape as an Application Aid, page 5).
- Use when little or no liner is exposed.
- Use if the graphic consists of large letters or wide stroke width.
- Use to protect the graphic when used in combination with spray painted clears (see Premasking Tape Used in Overpaint Systems, page 5).

B. When to Use Prespacing Tape

- Hold cut and weeded letters or graphics in registration after removing the film liner (see Prespacing Tape for Cut Graphics, page 5).
- Protect cut graphic parts from scratching or damage during application.
- Use when large amounts of liner are exposed.
- Use if the graphic consists of small letters or narrow stroke width.

10. Application Tape as An Application Aid

An application tape can reduce stretching, wrinkling and air entrapment during hand application of the graphic film to the substrate. The tape increases the stiffness of the graphic, which makes the graphic easier to handle.

An application tape is typically recommended when the graphic meets at least one of these criteria:

- Graphic constructions less than 4 mils thick (film or film and overlamine).
- Graphics that are four square feet (0.4 m²) or larger.
- Striping or intricately-cut graphics.
- Vinyl films printed with solvent-based inkjet inks.
- Graphics applied at high temperatures.

Important Note!

Do not use an application tape on textured substrates such as 3M™ Wrap Film 1080 Carbon Fiber films. The graphic may not have enough initial adhesion to the substrate for the application tape to be removed without lifting the graphic.

11. Premasking Tape in Overpaint Systems

Application tape can protect the graphic from staining when overpainted with most finish paints. This allows you to apply premasked graphics to the prime coat and then apply the finish coat around the graphic. This method effectively edge seals the graphic by embedding the graphic in the paint. The application tape should be removed while the paint is still tacky, but not wet.

Refer to [3M Instruction Bulletin 5.4](#) for complete details.



When using any equipment, always follow the manufacturers' instructions for safe operation.

12. Prespacing Tape for Cut Graphics

A. About Removing Film from Liners

Applying an application tape to prespaced cut graphic parts eliminates the time-consuming layout of individual parts on the application surface.

Graphic film with Comply adhesive, or Controltac graphic films: Do NOT remove these films from their liners and then attempt to reapply the film to the liner. The liners on these films play an important role in how the films apply to a substrate. Key application features will be lost if you prematurely remove the liner.

For films with Comply adhesive where there is liner exposed, use only prespacing tape SCPS-55 and with Comply v3 adhesive specifically, use this prespacing tape for only large cut graphics. See Section 9.B. for more information.

B. Procedure for Prespacing Graphics

1. Follow the recommended cutting sizes found in each film's 3M Product Bulletin.
2. Make the cut only through film and adhesive. Refer to [3M Instruction Bulletin 4.1](#) for specific recommendations.
3. Weed (remove) the background material that will not be used in the graphic.


Note: Use caution to avoid lifting very narrow characters from the liner.

4. Apply the appropriate application tape specified in the Usage Recommendations Tables. See the Techniques for Applying Application Tape section later in this bulletin for more specific instructions.
5. Trim the graphic to size.

Note: Always check for ease of part pick up before releasing the job. This is particularly important if the cut graphics include small letters, narrow stroke letters or intricate designs with narrow stroke widths or if applying prespacing tape to an exposed liner of a film with Comply adhesive.

6. If the prespacing tape does not adequately pick up the cut graphic parts or adhere well to the liner, a heat lamp vacuum applicator may be required. Process the graphic with its prespacing tape in a heat lamp vacuum applicator at 150°-180°F (66°- 82°C). The duration of this process is dependent upon the type of equipment used. Typically, a two-minute cycle with little or no dwell time at the peak temperature will provide satisfactory results.
7. If the prespacing tape does not remove all of the prespaced cut graphic parts easily from the liner, reapply the tape using a squeegee to secure the elements back to the liner. Then gently pull the graphic, liner-side down, over the corner edge of a surface. This helps loosen any imbedded kiss cut edges. See FIGURE 1.

FIGURE 1
Loosening Prespaced Graphics
from a Liner

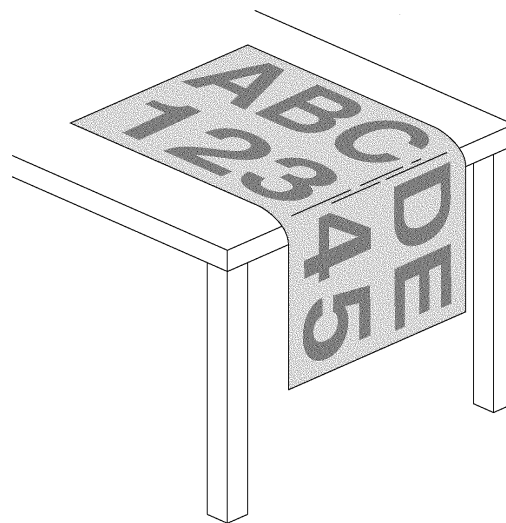

CG-251A

13. Printing Instructions on Application Tapes

The surface of the application tape can be printed with application instructions and registry marks that aid in positioning and application. These tapes have been successfully printed using the following methods: screen printing, hand printing/stamping, and press printing. Check with an ink manufacturer for assistance in selecting and using an ink for printing application tape. 3M does not provide an ink for this use.

Refer to the ink container labels and the ink manufacturer's Material Safety Data Sheet for health, safety and handling information.

One recommended supplier is Nazdar Inc. at 800-767-9942 or www.nazdar.com (website includes SDS sheets).

A. Screen Printing

1. Screen print using NazDar® 9700 air dry ink or an equivalent. Use a 200 to 305 tpi (threads per inch) screen or equivalent.
2. Rack and air dry for 30 minutes.

B. Hand Printing

Hand stamp using the NazDar® 4411 black ink or equivalent.

C. Press Printing

Use a fast drying halftone black. Avoid heavy ink laydown.

14. Protecting Graphics During Vehicle Refinishing

To protect existing 3M graphics when a vehicle is being refinished, use the application tape recommended in [3M Product Bulletin A-1](#) for the last applied component of the vehicle's existing graphic.

1. Cover the graphic with a slightly oversized piece of application tape.
2. Cut carefully around the edges with a sharp razor blade.
3. Remove the excess tape.
4. Apply the paint.
5. Remove application tape while paint is still tacky, but not wet.

15. Techniques For Applying Application Tape

In addition to other Bulletins specified in this document, the following Bulletins provide details that you may need to successfully apply a graphic.

- Application, substrate selection, preparation and substrate-specific application techniques. [3M Instruction Bulletin 5.1](#).
- A guide to understanding and applying graphics to common indoor and outdoor wall surfaces. [3M Instruction Bulletin 5.37](#).
- Application, general procedures for indoor and outdoor dry applications. [3M Instruction Bulletin 5.5](#).

A. Preparation of Printed Graphics Before Applying Application Tape

Be sure that printed graphics are thoroughly dried or cured before applying application tape. For specific recommendations, see the Instruction Bulletin for the inks being used.

If sheets must be stacked, wrap the stacks with polyethylene and seal to minimize moisture absorption or loss during storage and handling. This can prevent uneven moisture absorption or loss, both of which results in the edges of the sheets waving or curling.

B. Cutting Films with Application Tape

Certain precautions should be noted when cutting. For specific recommendations see [3M Instruction Bulletin 4.1](#).

C. Hand Premasking Procedure

1. Lay an appropriately-sized piece of application tape adhesive-side-up on a table. See FIGURE 2.

FIGURE 2
Lay the Application Tape
Adhesive-Side-Up



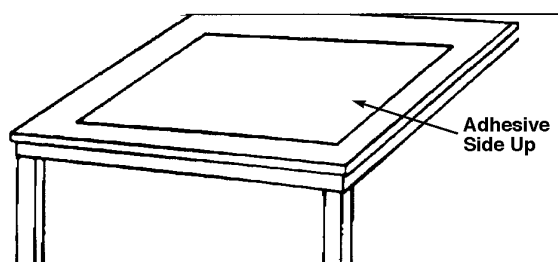


FIGURE 3
Align the Graphic Face Down

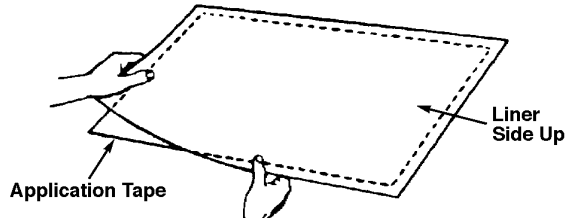

2. Align the graphic face-down on the application tape adhesive. See FIGURE 3.

FIGURE 4
Squeegee the Graphic and Application Tape

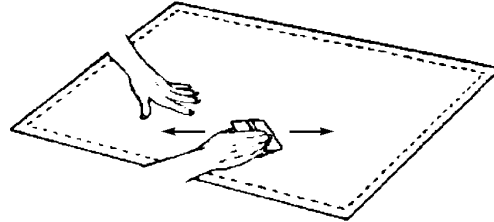

3. Squeegee the graphic from the liner side to adhere the application tape. Work from the center out. See FIGURE 4.

4. Flip the entire graphic/application tape assembly over and squeegee the application tape side. Again, work from the center out.

5. Trim the graphic to size or cut it to shape. See Cutting Films with Application Tape.


D. Mechanical Lamination

Numerous laminators are available. FIGURE 5 provides two examples. Follow the manufacturer's operating and safety procedures.



When using any equipment, always follow the manufacturers' instructions for safe operation.

FIGURE 5
Examples of Mechanical Equipment

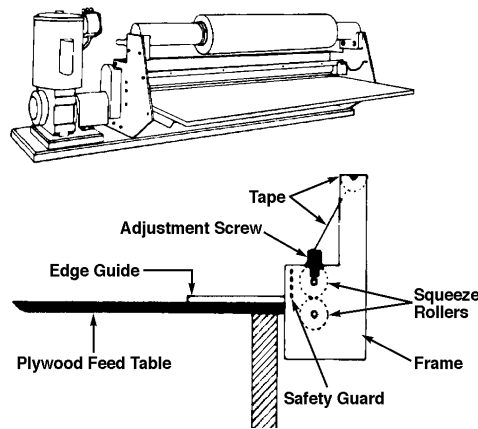

E. Suggestions When Using 3M Application Tapes

- Do not apply brake pressure to the application tape feed roller. Brake pressure stretches the tape during lamination causing the application tape to shrink on the finished graphic.
- The application tape laminator should have at least one rubber squeeze roller at the nip site.
- The recommended nip pressure setting depends on the device used. In general, higher pressures and temperatures will provide higher adhesion of the application tape to the film and exposed liner. Excessive pressure can cause the application tape or the film's liner to curl.
- An edge guide and a feed table can be used to keep the graphic aligned with the application tape.
- After completing a job, the laminator may be left threaded, but remove the pressure from the squeeze rollers. Prolonged pressure flattens the rollers, which can cause lamination problems.
- A heated roller may be used up to a temperature of 200°F (93°C).

16. Techniques for Removing the Liner and Application Tape

- To remove a liner, *always* peel the liner away from the graphic construction (application tape/graphic film).

Note: Never peel the graphic construction away from its liner; this can stretch or distort the underlying graphic.

- To remove the application tape after the graphic film is properly applied to the substrate:
 1. Remove the application tape by peeling it away from the graphic film at a low angle of approximately 180°.
 2. Resqueegee all edges to ensure good adhesion to the substrate.



Watch a video on prespacing cut graphics and see how to peel the application tape away from the graphic.

17. Shelf Life, Storage, Handling

An application tape helps graphics resist normal surface abrasion during storage, handling and application.

As tape ages or when stored at elevated temperatures, its adhesive becomes more aggressive. Unrolling the tape during mechanical application can cause the tape to stretch resulting in pop-off and curl of the graphic. If the graphic has been improperly stored, the tape can be difficult to remove from finished graphics making removal more difficult and resulting in edge lifting.

A. Unused Application Tape

- The shelf life is one year from the date of purchase.
- Store in a cool, dry place, suspended horizontally from the core.
- Avoid exposure to sunlight.

B. Graphics with Application Tape Applied

- After the application tape has been applied to the graphic, store in a cool, dry place and avoid exposure to sunlight.
- **Most films:** Store flat or wrapped onto cores with a minimum diameter of 6 inches (15 cm). Wrap so the side of the film with the application tape faces out.
- **Film 680CR and IJ680CR:** Finished graphics with exposed liner and application tape, must be shipped lying flat. This method will help prevent the graphics and prespacing tape from popping off the liner.
- Typically, most finished graphics should be applied within one year from the date of its processing or by the total shelf life date of the base film, whichever comes first. Always refer to the base film's 3M Product Bulletin for your specific application.

Important Note!

After applying application tape, avoid exposing the graphic to sunlight except during application. Sunlight, or UV light, can cause the tape to permanently bond to the film.

18. Bulletin Change Summary

Modified and new content is marked with a black bar in the margin. Replaced recommended Premasking and Prespacing tape tables with link to 3M Instruction Bulletin AT-1. The 3M Related Literature section has been replaced by direct links to the most current versions of Bulletins or warranty information you may need to successfully use this product. All links are blue underlined text. All electrostatic products have been removed from this bulletin.



Commercial Solutions

3M Center, Building 220-12E-04
St. Paul, MN 55144 USA
General & Technical
1-800-328-3908
Fax 1-651-736-4233

www.3Mgraphics.com

3M Canada

PO Box 5757
London, Ontario
Canada N6A 4T1
General
1-800-265-1840
Fax 519-452-6245

3M México S.A. de C.V.

Av. Santa Fe No. 55
Col. Santa Fe, Del. Alvaro Obregón
México D.F. 01210
General 5255-5270-0400
Fax 5255-5270-2277

3M Puerto Rico, Inc.

350 Chardon Avenue
Suite 1100
San Juan, PR 00918
General 787-620-3000
Fax 787-620-3018

3M, Comply, Controltac, Envision, Scotchcal and Scotchlite are trademarks of 3M. NazDar is a registered trademark of Nazdar, Inc. All other trademarks are the property of their rightful owners.

©3M 2015. All rights reserved.