

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	08/23/11	TRC

ENGINEERING DATA:

ELECTRICAL:

FREQUENCY RANGE: DC to 11 GHz
IMPEDANCE: 50 OHMS

MATERIALS / FINISHES:


BODY: BRASS, ASTM-B16
CENTER CONTACT: BERILLIUM COPPER, ASTM-B-196
OUTER CONTACT AND C RING: PHOS. BRONZE, ASTM-B-103
INSULATOR: TEFLON, ASTM-D-4894



MECHANICAL:

INTERFACES PER MIL-STD-348A

NOTES:

1. ALL DIMENSIONS ARE SHOWN FOR REFERENCE ONLY

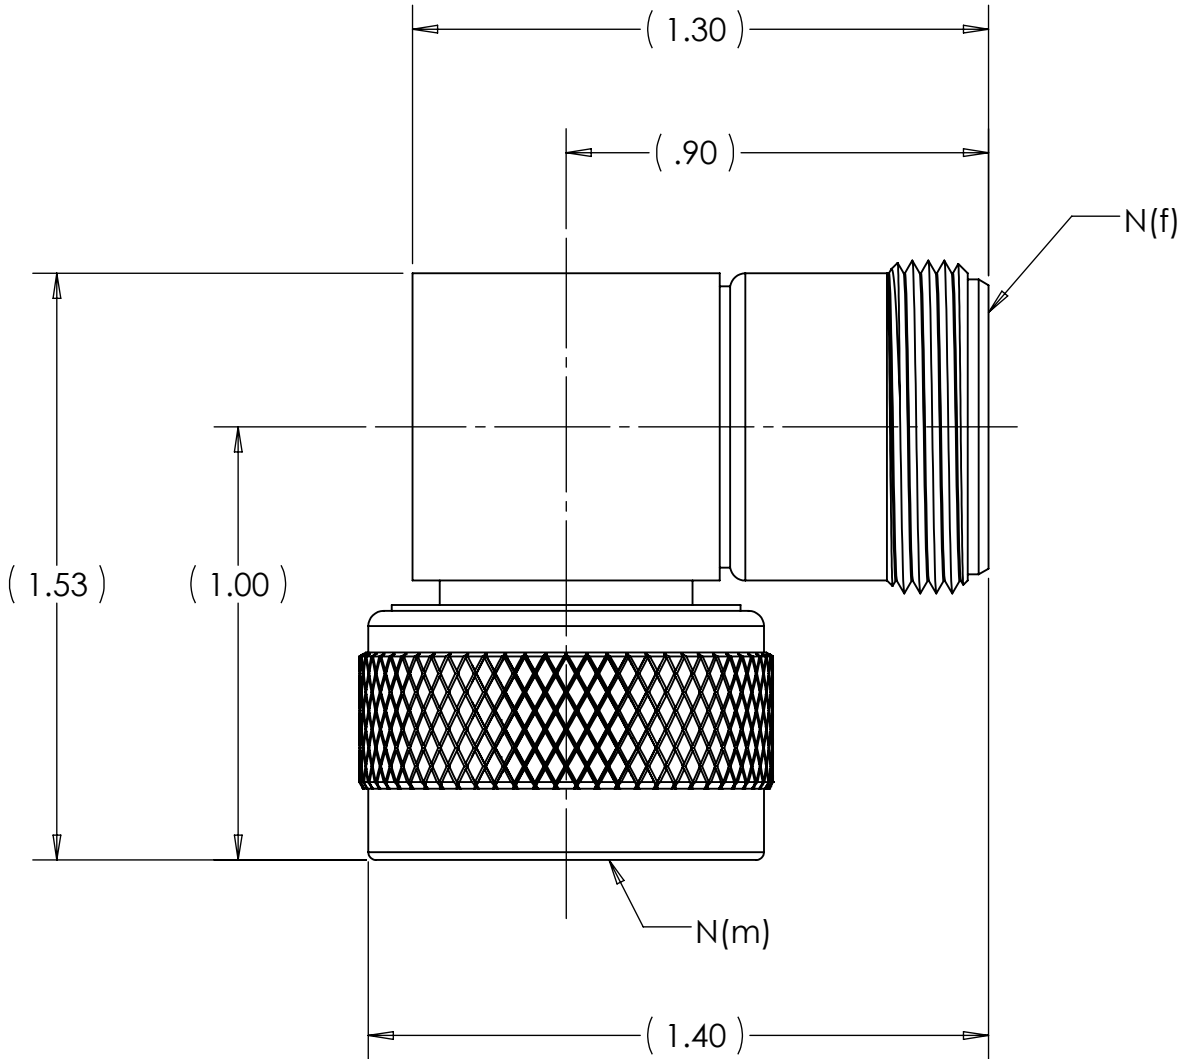

MATERIAL		DO NOT SCALE DRAWING		DRAWN TRC	DATE 08/15/11	<div>TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™</div>		
		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ± 1/64 .XX : ± .01 .XXX: ± .005 ANGLES: ± 1/2° MACHINED SURFACES: 63/√		ENG APPR. TRC	DATE 08/23/11			
				MFG APPR.	DATE			
				OTHER APPR. AM	DATE 08/19/11			
COMMENTS:		THIRD ANGLE PROJECTION 		SIZE B		DWG. NO. TRU-11765		REV -
				CAGE CODE: 92180		SCALE: 2:1	SHEET 1 OF 1	
surface area: 10.16 sq inch		weight: 0.05 lbs						