


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	02/09/96	RMK
A	CHANGED PER ECO-4541	12/03/14	AM

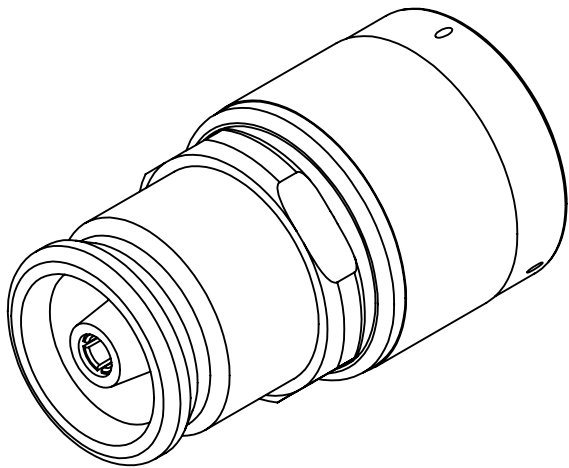

ENGINEERING DATA


ELECTRICAL:  
IMPEDANCE: 50 OHMS NOMINAL



MECHANICAL:  
INTERFACE: QDS(f) per TRU SPEC  
N(m) per MIL-STD-348 FIG. 304.1

MATERIAL:  
INSULATORS: PTFE  
GASKET: SILICONE RUBBER  
CONTACT: BERYLLIUM COPPER  
CONTACT FINGERS: PHOSPHOR BRONZE  
OTHER METAL PARTS: BRASS

FINISH:  
ALL METAL PARTS: SILVER PLATED

NOTES:  
1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.

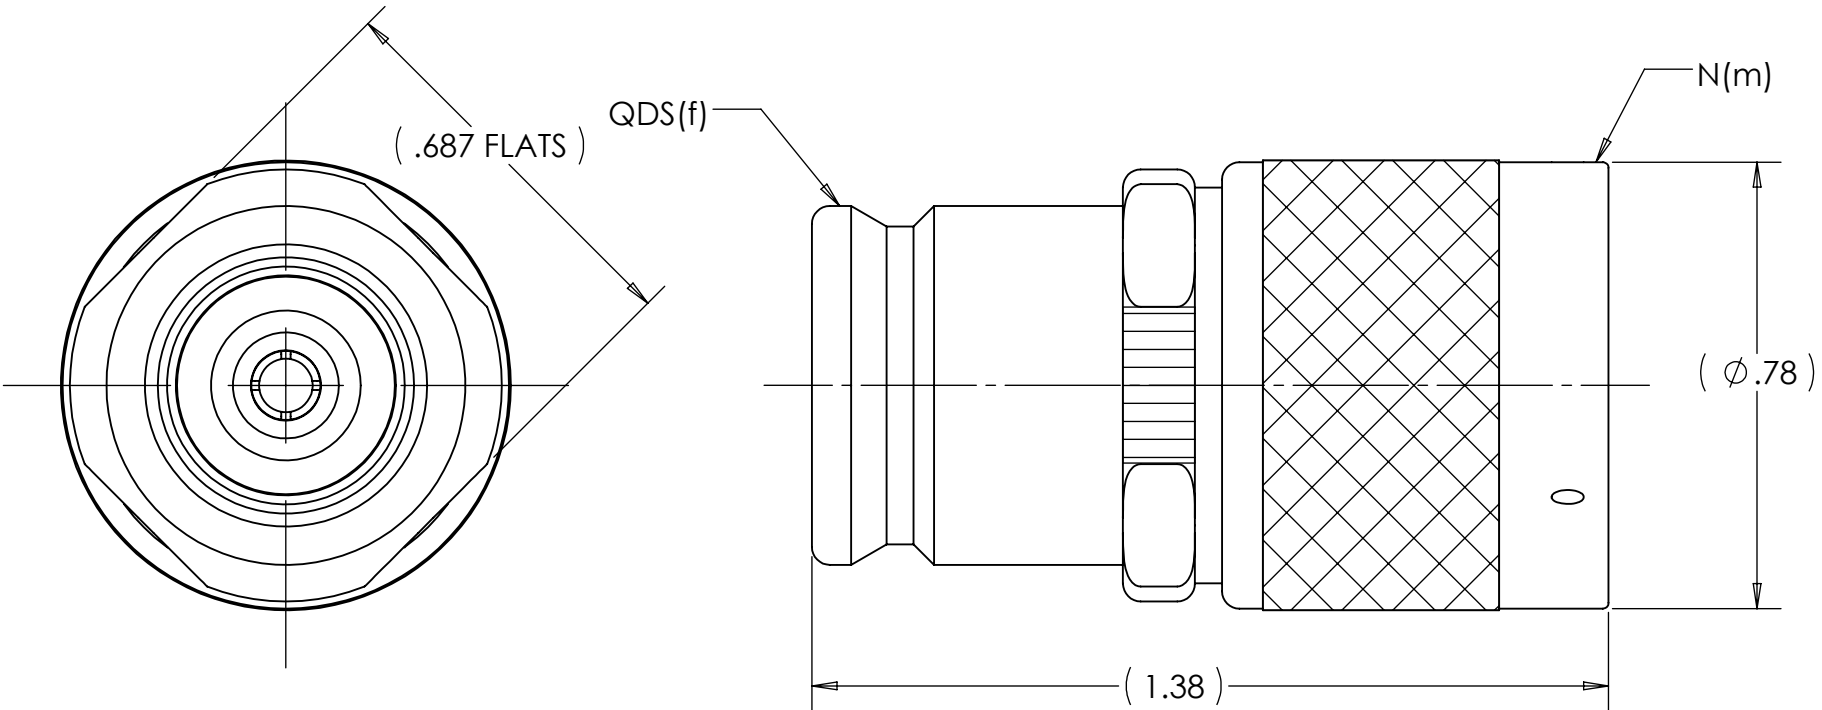

MATERIAL		DO NOT SCALE DRAWING		DRAWN WWW	DATE 02/09/96	<div><div>TRU Corporation 245 Lynnfield St, Peabody, MA 01960</div></div>			
		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES  TOLERANCES: FRACTIONS: ± 1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ± 1/2° MACHINED SURFACES:  63/√		ENG APPR. RMK	DATE 02/09/96				TITLE:  CONNECTOR, COAXIAL QDS(f) to N(m) ADAPTER
				MFG APPR.	DATE				
				OTHER APPR.	DATE				
COMMENTS:		THIRD ANGLE PROJECTION 		SIZE B	DWG. NO. TRU-1146		REV A		
				CAGE CODE: 92180		SCALE: 3:1	SHEET 1 OF 1		
surface area: sq inch		weight: lbs							