

DIAMOND 1K™

One-Component Gym Floor Finish



Fast-Cure, High-Solids, One-Component, High-Performance Gym Finish

HILLYARD

First In Gym Finishes®

DIAMOND 1K

One-Component Gym Floor Finish

One-Component, High-Solids, Water-based Gym Finish




One-Component, Easy Coverage

The high 29% solids content delivers a durable coating simply and easily. Add a recommended second coat after 4 to 6 hours.



Exceptional Clarity & Depth

Other finishes distort the natural color of the wood and can alter the true color of game lines and painted logos. Diamond 1K's clarity and depth keeps colors true.

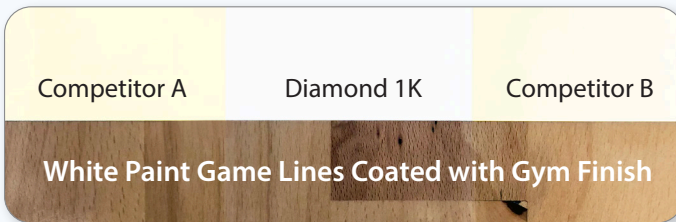

Fast Cure Time - Less Downtime

Diamond 1K not only delivers durability, it cures faster than traditional finishes. Under normal conditions, Diamond 1K will be 95% cured and ready for play in 72 hours!



Water-Based - Low Odor - Low VOC's

Diamond 1K's virtually odorless application, and a VOC level under 250, minimizes the impact on your facilities environment.

Simplify Floor Maintenance

Simplify gym floor maintenance without sacrificing performance. Diamond 1K™ Gym Finish is an easy-to-use, fast-drying, low VOC, one-component water-based gym floor finish. Apply Diamond 1K directly from the container, eliminating the complexity of mixing and measuring. The result is a durable finish layer that protects the floor and provides athletes with a sure-footed playing surface.

In addition to being easy to use, Diamond 1K makes floors look fantastic! Diamond 1K's clarity allows the natural wood features to shine through, and painted lines and logos will maintain their true, accurate colors.

Simple Prep

Use a Surface Preparation Pad (SPP) to prepare the floor for a new finish layer. The SPP provides the right amount of abrasion without creating swirl marks for two-coat coverage of Diamond 1K.

Easy Application

Diamond 1K is formulated to make application smooth and forgiving. It is easy to apply even for those with less coating experience.

Specifications

1 Gallon Bottle	HIL0027506
5 Gallon Pail	HIL0027572
Coverage Rate Per Gallon	500 - 600 sq/ft
Dry-time	4-6 Hours
Open for use	72 Hours
Volatile Organic Compounds	< 250 g/l
Non-Volatile Matter (Solids)	29%

HILLYARD
First In Gym Finishes®

PO Box 909
St. Joseph, MO 64502
www.hillyard.com