


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	03/12/14	AM

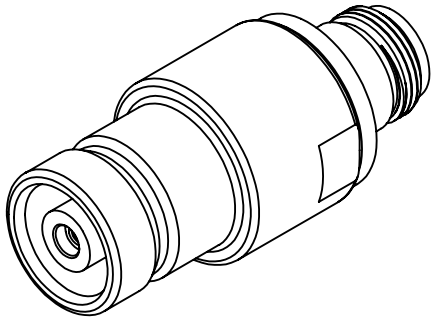

ENGINEERING DATA


ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL



MECHANICAL:
INTERFACE: QRM(f) per TRU STANDARD
N(f) per MIL-STD-348 fig. 304-2

MATERIAL:
CONTACTS: BERYLLIUM COPPER
INSULATORS: PTFE
HOUSINGS: BRASS

FINISH:
CONTACTS: SILVER PLATED
QRM HOUSING: NICKEL PLATED
TYPE N HOUSING: SILVER PLATED

NOTES:
1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.

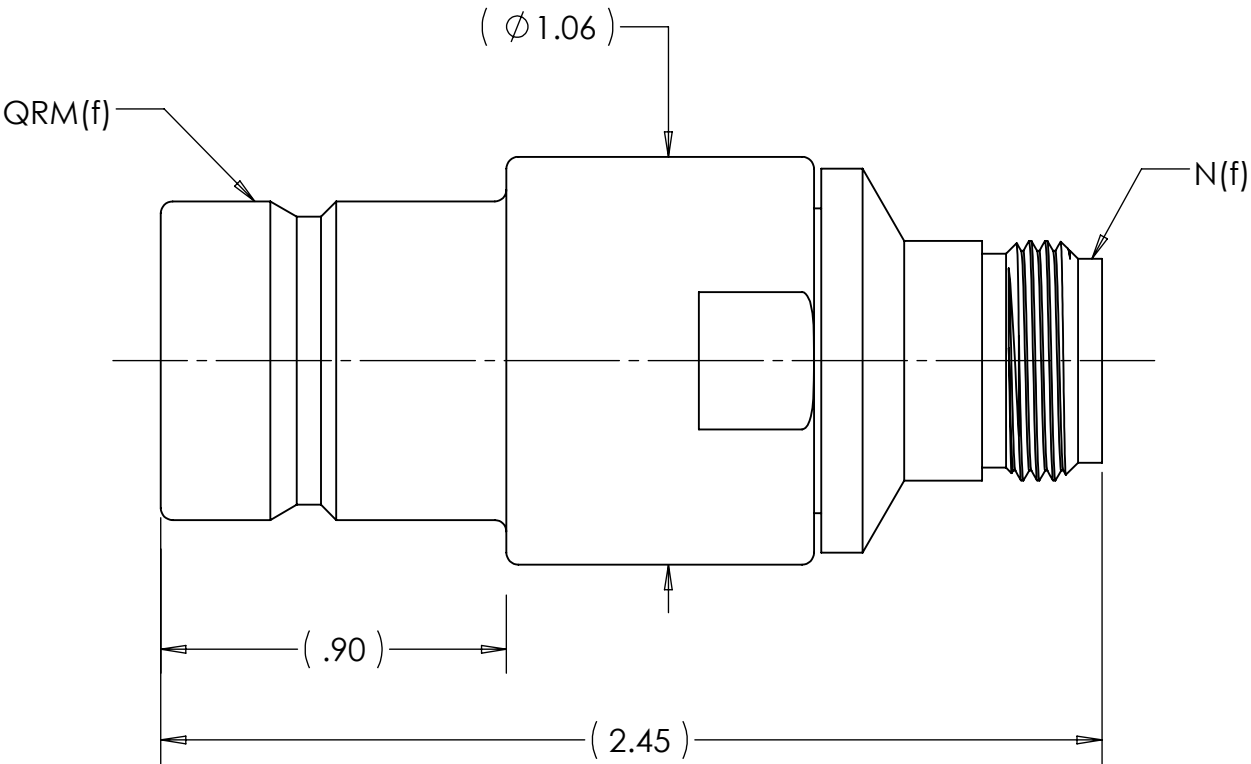

MATERIAL	DO NOT SCALE DRAWING		DRAWN AM	DATE 03/11/14	 TRU Corporation 245 Lynnfield St, Peabody, MA 01960 <i>EXPERIENCE. TRU INNOVATION.</i>	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		ENG APPR. AM	DATE 03/11/14		
	TOLERANCES: FRACTIONS: ± 1/64 .XX : ± .01 .XXX: ± .005 ANGLES: ± 1/2° MACHINED SURFACES:		MFG APPR.	DATE	TITLE: CONNECTOR, COAXIAL QRM(f) to N(f) ADAPTER	
	63/√		OTHER APPR.	DATE		
COMMENTS:	THIRD ANGLE PROJECTION 		SIZE B		DWG. NO. TRU-12636	REV -
surface area: sq inch			weight: 0.292 lbs	CAGE CODE: 92180		SCALE: 2:1