
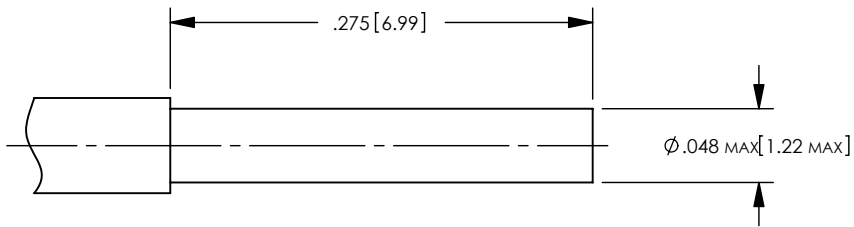


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD74-0000.
2. MATERIAL SPECIFICATIONS:  
BRASS PER ASTM B16
3. FINISH SPECIFICATIONS:  
.000030 MIN. GOLD PER ASTM B488 OVER .000080 MIN. NICKEL PER AMS QQ-N-290.
4. ELECTRICAL SPECIFICATIONS:  
CURRENT RATING: 8 AMPS
5. FOR USE WITH 20 AWG WIRE OR EQUIVALENT.
6. REFER TO CAP10-01 FOR CABLE ASSEMBLY PROCEDURE.

REV	DESCRIPTION	BY DATE	APPD
B	ER7306	04/11/08 CWB	CWB

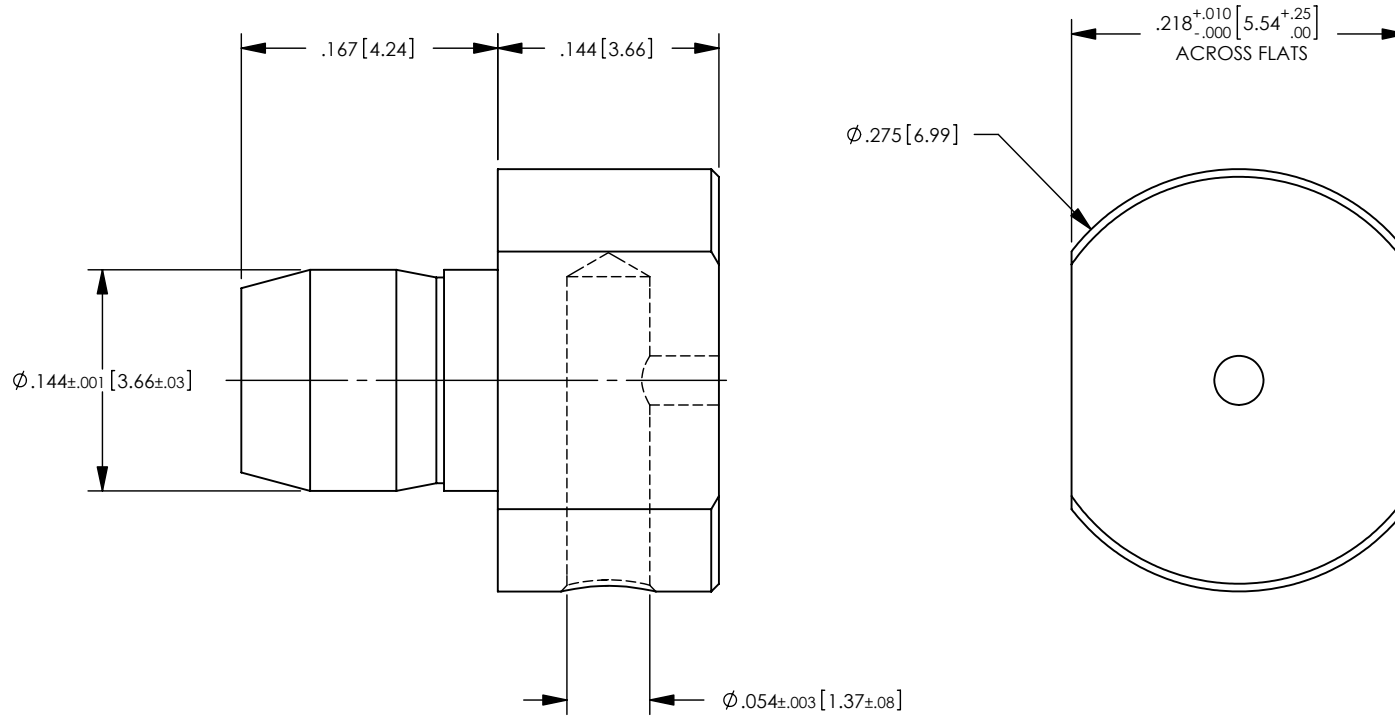

RECOMMENDED CABLE TRIM DIMENSIONS

CATALOG P/N: 01431G

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2°                      SCALE: 8:1				 Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
<b>CUSTOMER DRAWING</b>					
DRAWN PSM	DATE 03/08/07	APPROVED DCam	DATE 05/16/07	<b>POWER SNAP, RIGHT ANGLE SOLDER MOUNT 20 AWG 8 AMP</b>	
APPROVED XXX	DATE XX/XX/XX	APPROVED WPM	DATE 05/16/07	<b>A</b>	<b>SD01431G</b>
				SHT 1 OF 1	REV B