



CR12U51001

Swing-out Wall Mount Enclosure

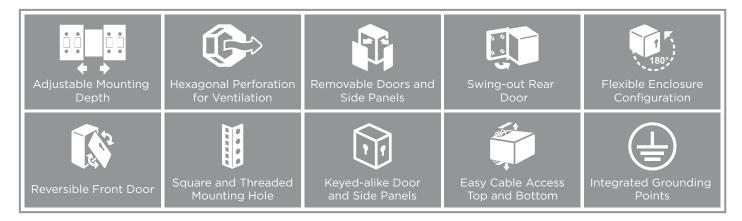

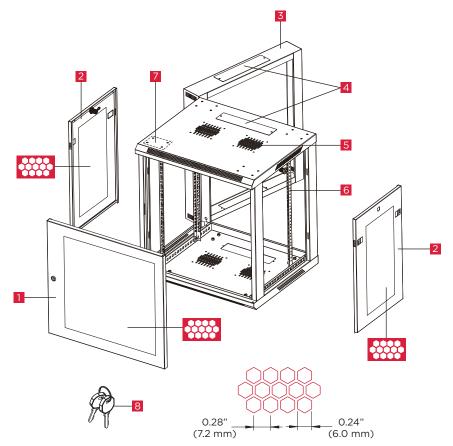

- 1 Removable, Reversible, and Lockable Front Door
- 2 Removable and Lockable Side Panels (2)
- 3 Swing-out Rear Door
- 4 Cable Access with Removable Covers (4)
- 5 Vents for Optional Fan Kit (4)
- 6 Depth-adjustable Rack Angles with Dual Mounting Holes (4)
- 7 Reserved Holes for Optional Caster Kit
- 8 Keys (2)

Hardware and Accessories

User's Manual	Expansion Bolt (4)	#12-24 Screw, Silver (30)
M6 Phillips-Head	M6 Cage Nut	Cup Washer
Screw, Black (30)	(30)	(30)

Specifications

Model	CR12U51001	
Rack Height	12U	
Max. Mounting Depth	18.4 in. (467 mm)	
Weight Capacity-Stationary	132.3 lbs. (60 kg)	
Unit Dimensions (WxHxD)	23.6 x 25.1 x 23.6 in. (600 x 637 x 600 mm)	
Shipping Dimensions (WxHxD)	26.2 x 27.4 x 26.2 in. (665 x 695 x 665 mm)	
Unit Weight	60.2 lbs. (27.3 kg)	
Shipping Weight	67.7 lbs. (30.7 kg)	
	DIN41491, DIN41494,	
Approvals	EIA/ECA-310-E,	
	IEC 60297-3-100, RoHS	

#All specifications are subject to change without notice.

Ships fully assembled.


- Versatile, space-efficient wall mount equipment protection maximizes floor space.
- Hexagonally perforated front door and side panels provide optimal ventilation.
- Reversible front door allows opening from left or right to meet different installation requirements.
- Swing-out rear door allows the enclosure to swing out away from the wall for easy access to the equipment and cabling.




Hexagonal holes, compared with round holes, allow more efficient airflow and therefore optimize ventilation.




Optional caster kit (including 4 casters) is available for mobility, allowing you to easily move and adjust the position of your rack products.

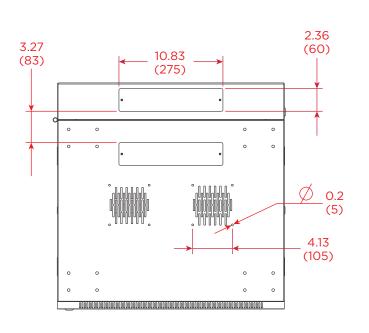


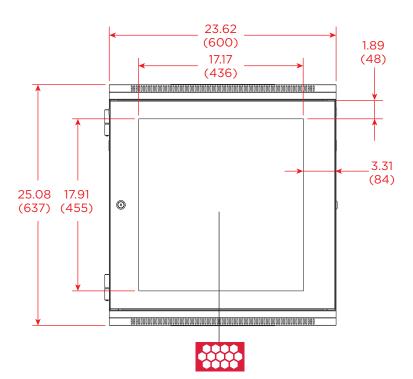

TOP/BOTTOM VIEW


FRONT VIEW

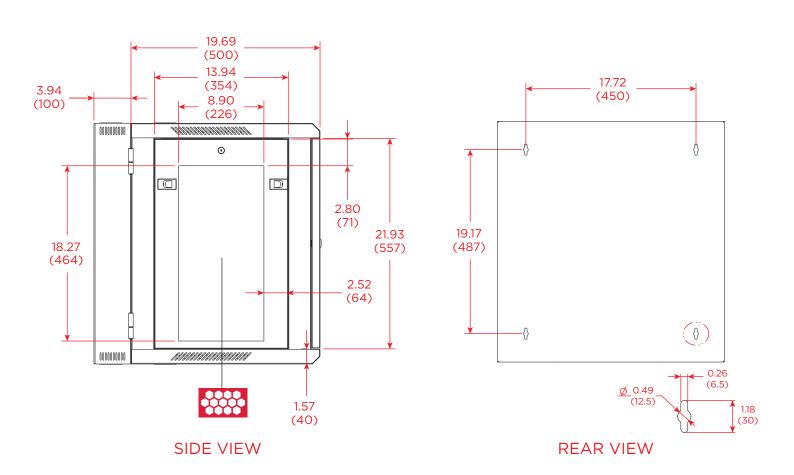

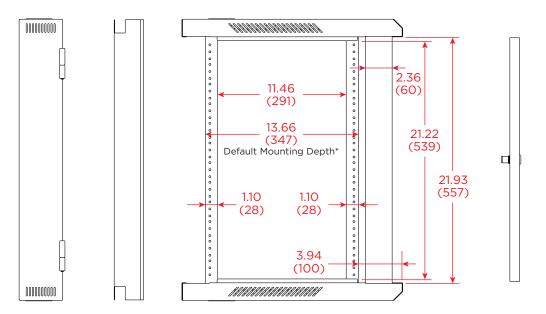

*Adjustable Mounting Depth: 1.9" -18.4" (47 - 467 mm)

SIDE VIEW W/O PANEL

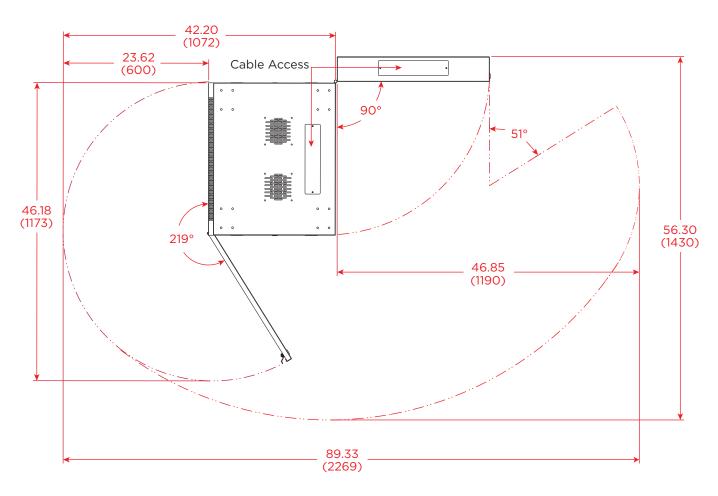

FRONT/REAR OPENING

Dimensions: INCHES (mm)



Cyber i ower cystems, me

www.cyberpower.com

USA and Canada:

4241 12th Ave East, Suite 400 Shakopee, MN 55379 Toll-free: (877) 297-6937

All other regions:

Please visit our website for local contact information.