


DWG. NO. 351-875-0631N			
REV	DESCRIPTION	BY	APPD
-	RELEASED PER NPR 1925	JED	7/21/00

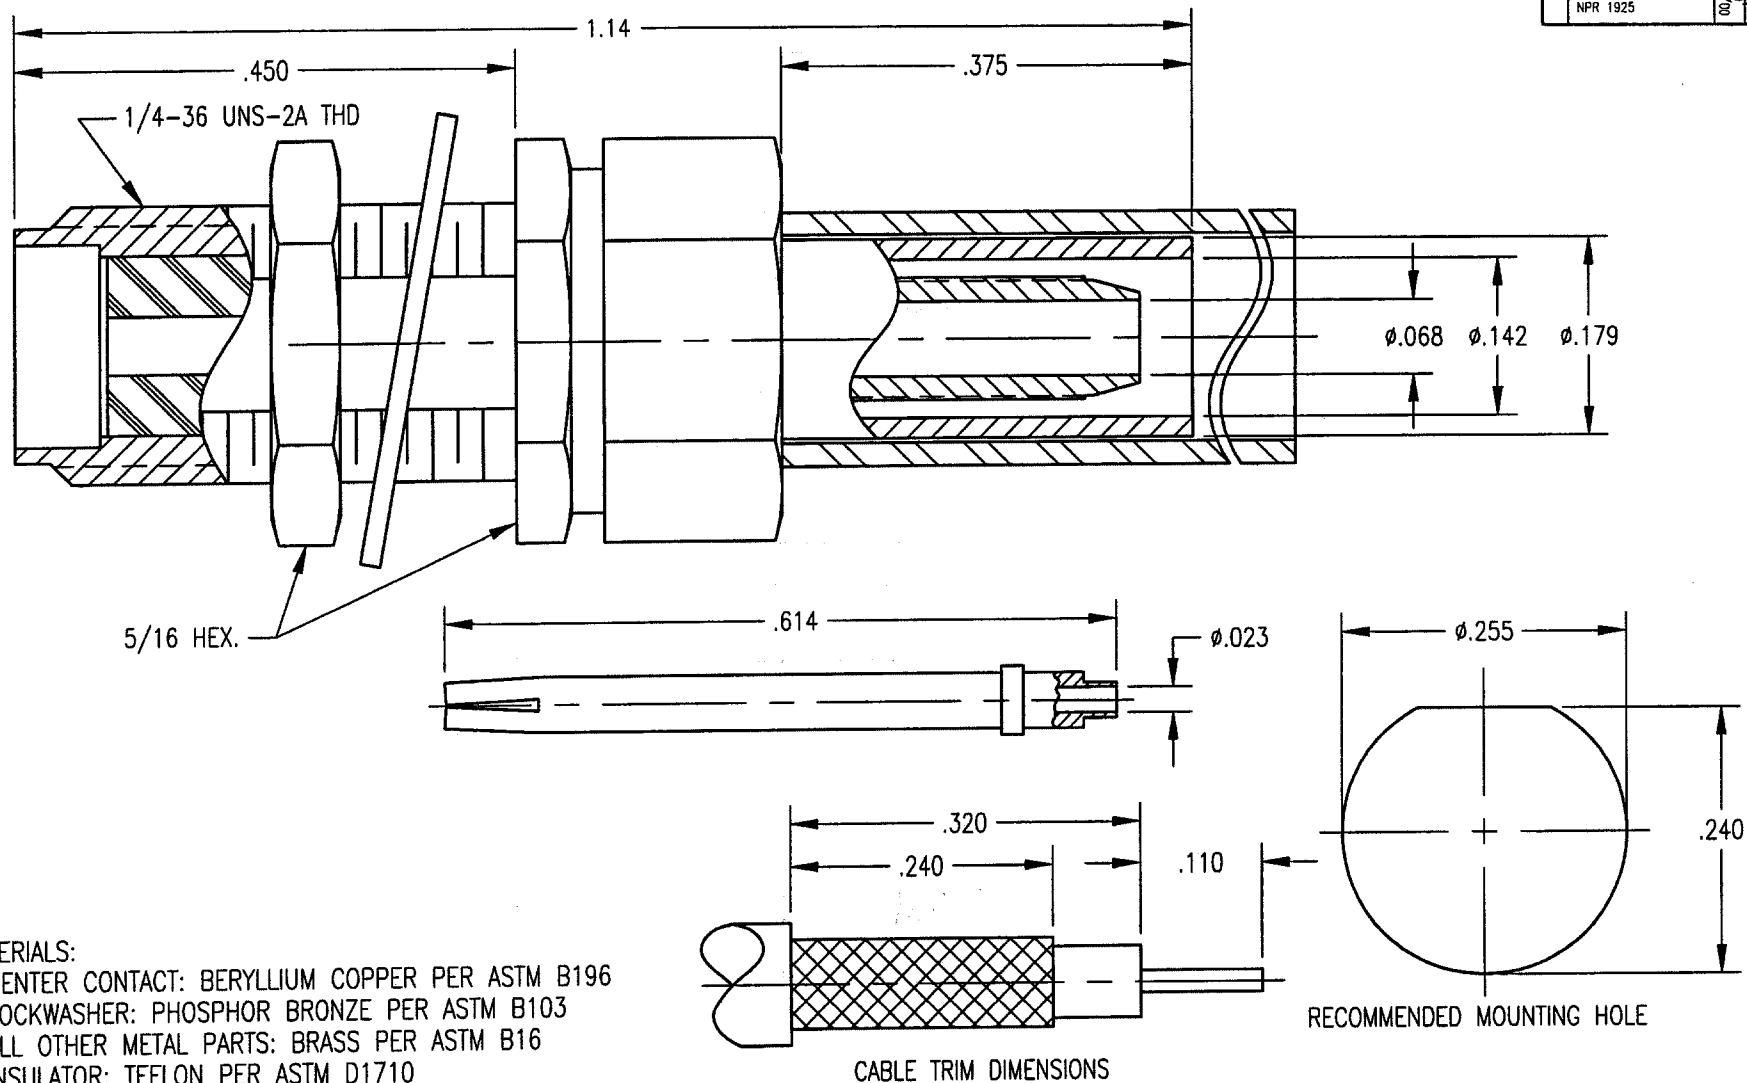

NOTES:

1. MATERIALS:

CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196
 LOCKWASHER: PHOSPHOR BRONZE PER ASTM B103
 ALL OTHER METAL PARTS: BRASS PER ASTM B16
 INSULATOR: TEFLON PER ASTM D1710

2. FINISH:

CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 ALL OTHER METAL PARTS: .000100 MIN. NICKEL PER QQ-N-290
 OVER COPPER FLASH

3. DESIGNED FOR USE WITH RG-316 CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 8-01 WITH TRIMMING DIMENSIONS SHOWN.

5. CRIMP FERRULE USING .151 HEX DIE.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM)		Litton	
TOLERANCES: DECIMALS .XX ± .01/0.254 .XXX ± .005/0.127 ANGLES ± 2°		Winchester/Retconn 400 Park Road Waterford, Connecticut 06795	
CUSTOMER DRAWING		TITLE STRAIGHT SMA BULKHEAD JACK (CRIMP/CLAMP)	
DATE 7/21/00	CHECKED JED	DATE 7-21-00	DATE 7-21-00
APPROVED 7-21-00		APPROVED 7-21-00	
351-875-0631N		SHT. 1	OF 1