

NOTES: UNLESS OTHERWISE SPECIFIED
1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD59-0000.

2. MATERIAL SPECIFICATIONS:

BODY, RETAINING RING AND NUT: BRASS PER ASTM B16
CENTER CONTACT: COPPER ALLOY
GASKET: SILICONE RUBBER PER A-A-59588
INSULATOR: TEFLON PER ASTM D1710
LOCKWASHER: PHOSPHOR BRONZE

3. FINISH SPECIFICATIONS:


BODY: .00080 MIN TRI-METAL OVER .000100 MIN COPPER PER ASTM B734.
CONTACT: .000030 MIN GOLD PER ASTM B488 OVER
.000080 MIN NICKEL PER AMS-QQ-N-290 (RoHS)
LOCKWASHER, NUT AND RETAINING RING: .000100 MIN NICKEL PER AMS-QQ-N-290
OVER COPPER FLASH PER ASTM B734.

4. ELECTRICAL SPECIFICATIONS:


NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 11GHz

5. GASKET, LOCKWASHER, AND NUT SHIPPED LOOSE.


6. DESIGNED TO MEET INGRESS PROTECTION REQUIREMENTS OF IP67.

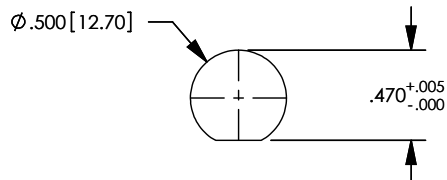

MOUNTING HOLE

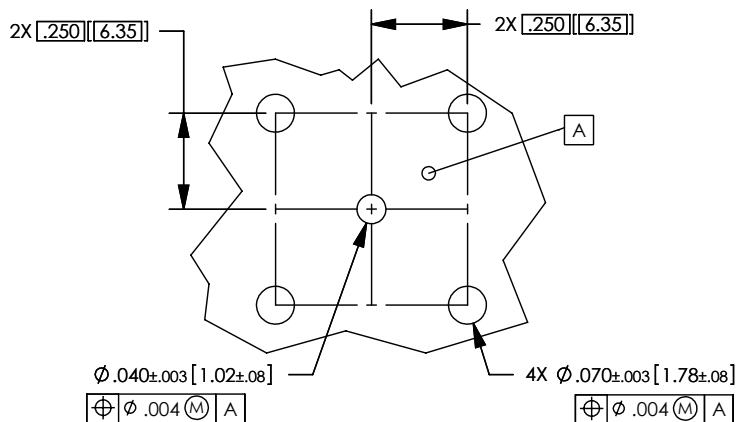

PC BOARD PATTERN

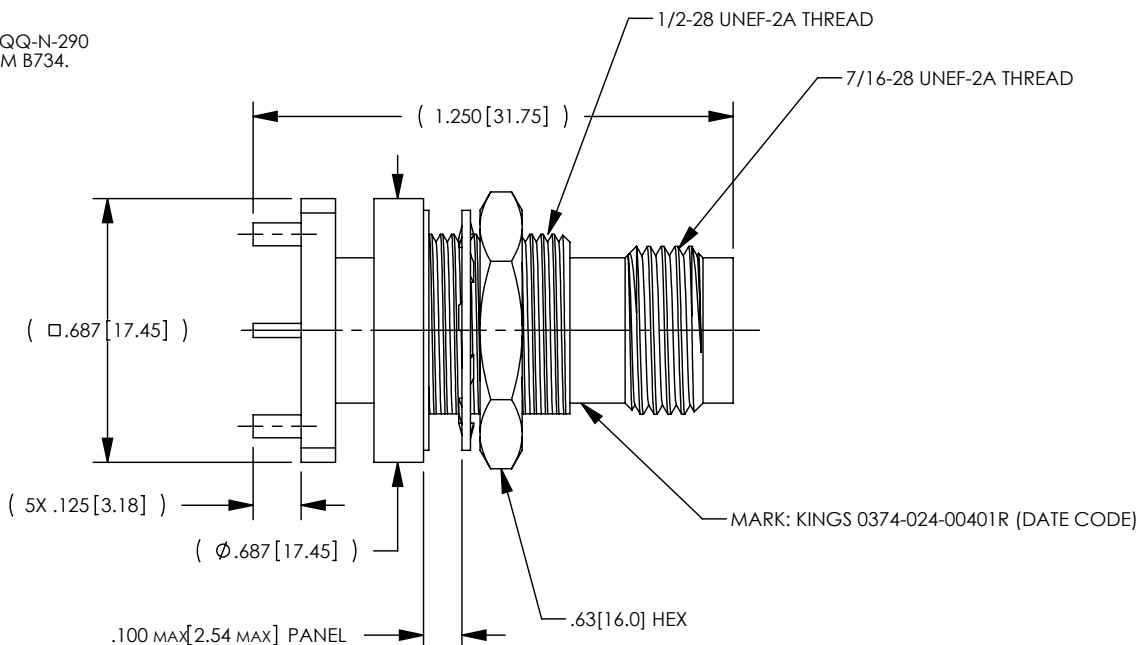

CATALOG P/N: 0374-024-00401R

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 2:1		KINGS by WINCHESTER Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
SALES DRAWING		50 OHM TNC POLARIZED, BULKHEAD JACK PCB MOUNT (RoHS)	
PSM	DATE	DRK	DATE
WPM	DATE	DCAM	DATE
A		SD0374-024-00401R	SHT OF REV 1 1 02